


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 1417'
THR ELEV 08L/08R 1369'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

**TASHKENT/UZTT
ISLAM KARIMOV
RNAV(GNSS) RWY08L/08R**

BAMUT 2A,
MIKNO 2A, ODORI 2A.

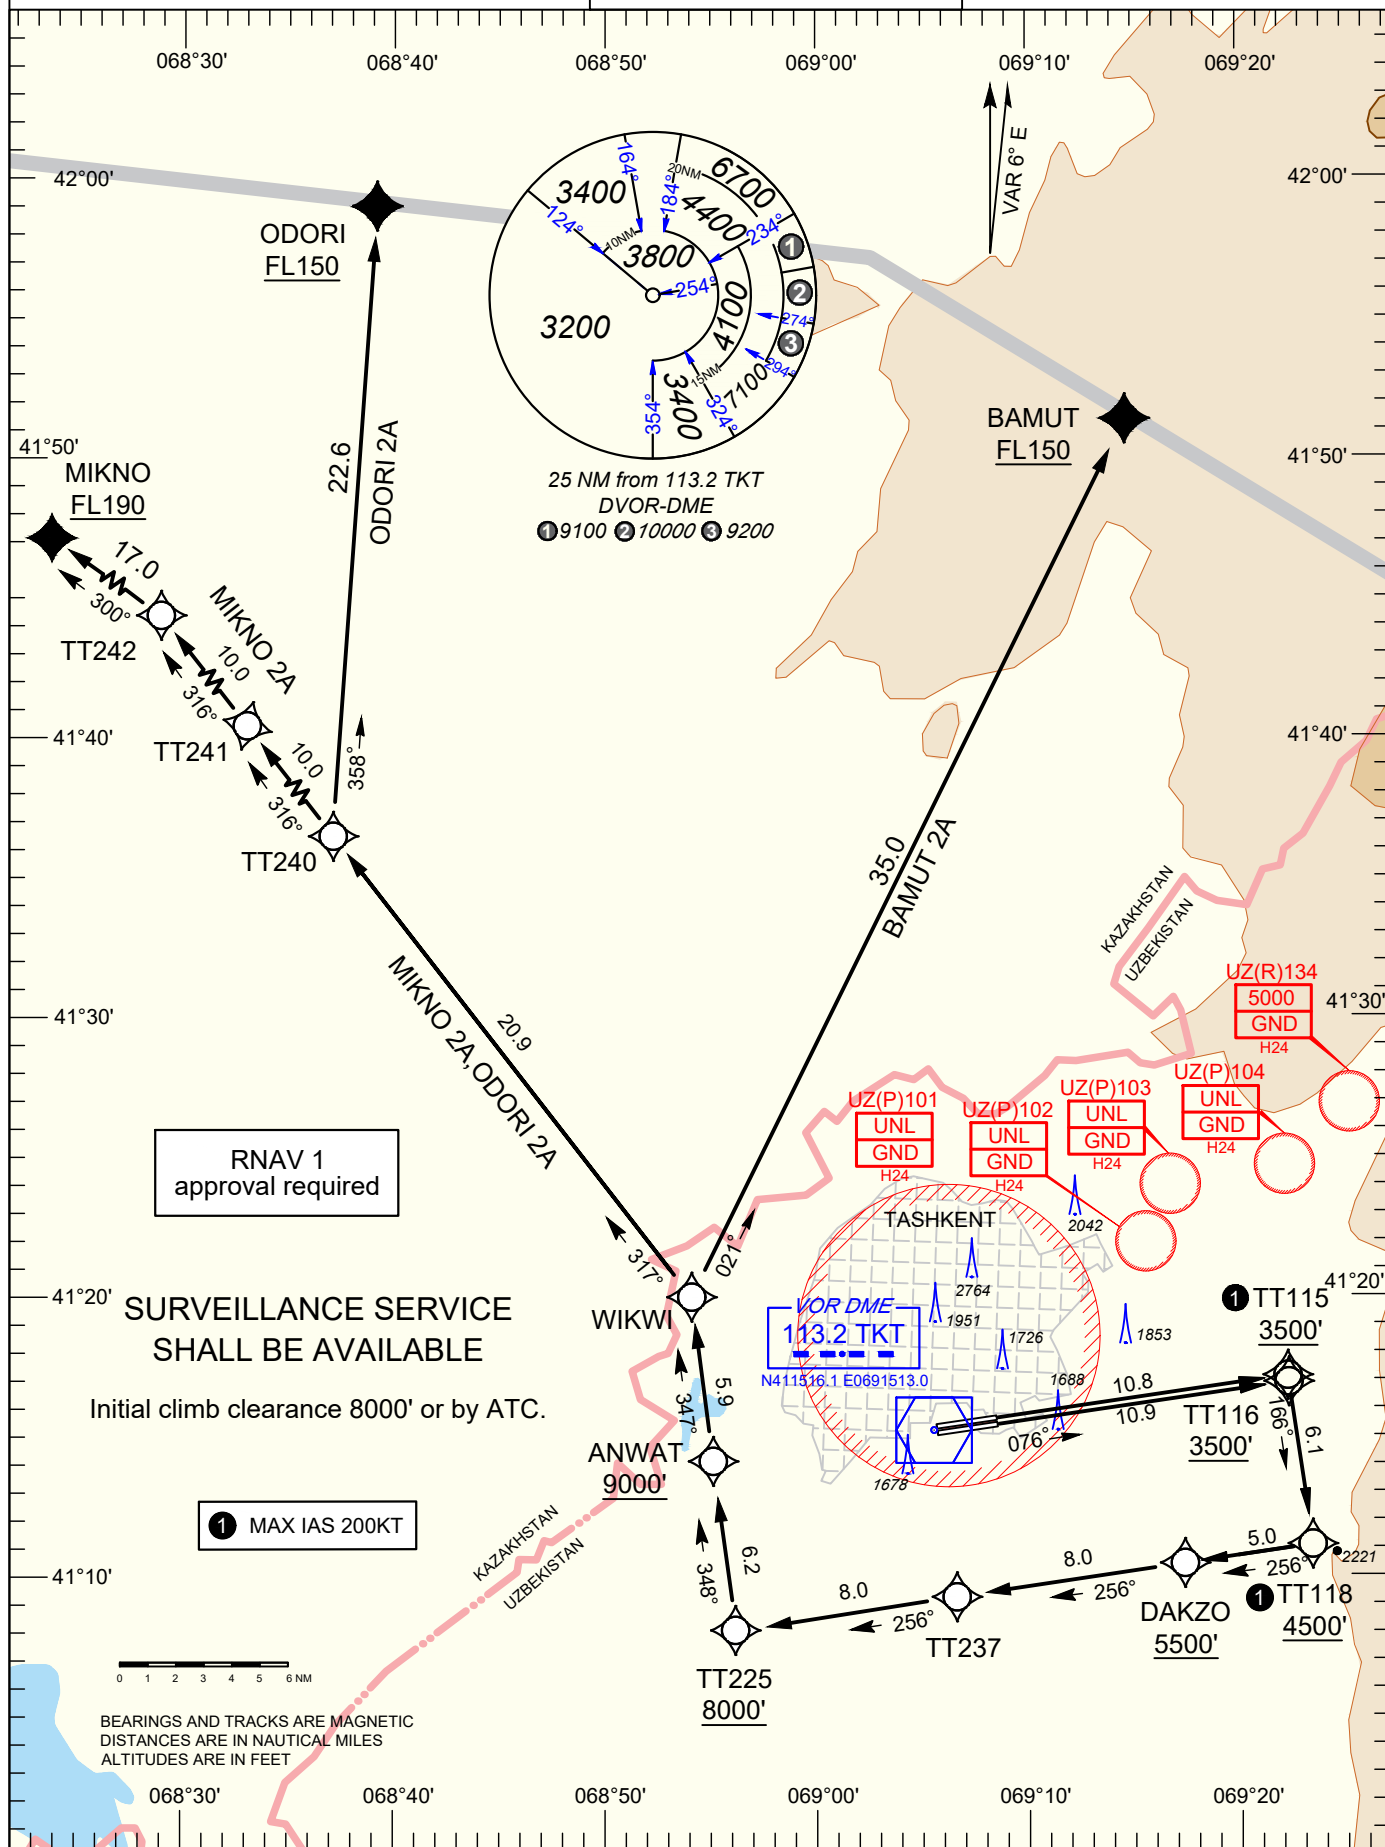

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY 08L/08R

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY08L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT115	-	076 (081.7)	+5.5	10.8	-	+A3500	-200	RNAV 1	
TF	TT118	-	166 (171.7)	+5.5	6.1	R	+A4500	-200	RNAV 1	
TF	DAKZO	-	256 (261.8)	+5.5	5.0	R	+A5500		RNAV 1	

INITIAL CLIMB RWY08R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT116	-	076 (081.7)	+5.5	10.9	-	+A3500	-200	RNAV 1	
TF	TT118	-	166 (171.7)	+5.5	6.0	R	+A4500	-200	RNAV 1	
TF	DAKZO	-	256 (261.8)	+5.5	5.0	R	+A5500		RNAV 1	

BAMUT 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	ANWAT	-	348 (353.0)	+5.5	6.2	R	+A9000	-	RNAV1	
TF	WIKWI	-	347 (352.1)	+5.5	5.9	-	-	-	RNAV1	
TF	BAMUT	-	021 (026.2)	+5.6	35.0	R	+FL150	-	RNAV1	

MIKNO 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	ANWAT	-	348 (353.0)	+5.5	6.2	R	+A9000	-	RNAV1	
TF	WIKWI	-	347 (352.1)	+5.5	5.9	-	-	-	RNAV1	
TF	TT240	-	317 (322.2)	+5.6	20.9	L	-	-	RNAV1	
TF	TT241	-	316 (322.0)	+5.7	10.0	-	-	-	RNAV1	
TF	TT242	-	316 (321.9)	+5.8	10.0	-	-	-	RNAV1	
TF	MIKNO	-	300 (305.3)	+5.8	17.0	L	+FL190	-	RNAV1	

ODORI 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	ANWAT	-	348 (353.0)	+5.5	6.2	R	+A9000	-	RNAV1	
TF	WIKWI	-	347 (352.1)	+5.5	5.9	-	-	-	RNAV1	
TF	TT240	-	317 (322.2)	+5.6	20.9	L	-	-	RNAV1	
TF	ODORI	-	358 (003.9)	+5.7	22.6	R	+FL150	-	RNAV1	