


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 1142'
THR ELEV 1118'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

BUKHARA APPROACH 124.6
NAVOI TOWER 132.0
VOLMET (english only) 113.8

**NAVOI/UZSA
RNAV (GNSS) RWY07**

AGDOS 3A, BIBED 3A,
BUPOR 3A, EVMUR 3A,
PETIT 3A, TOLIB 3A.

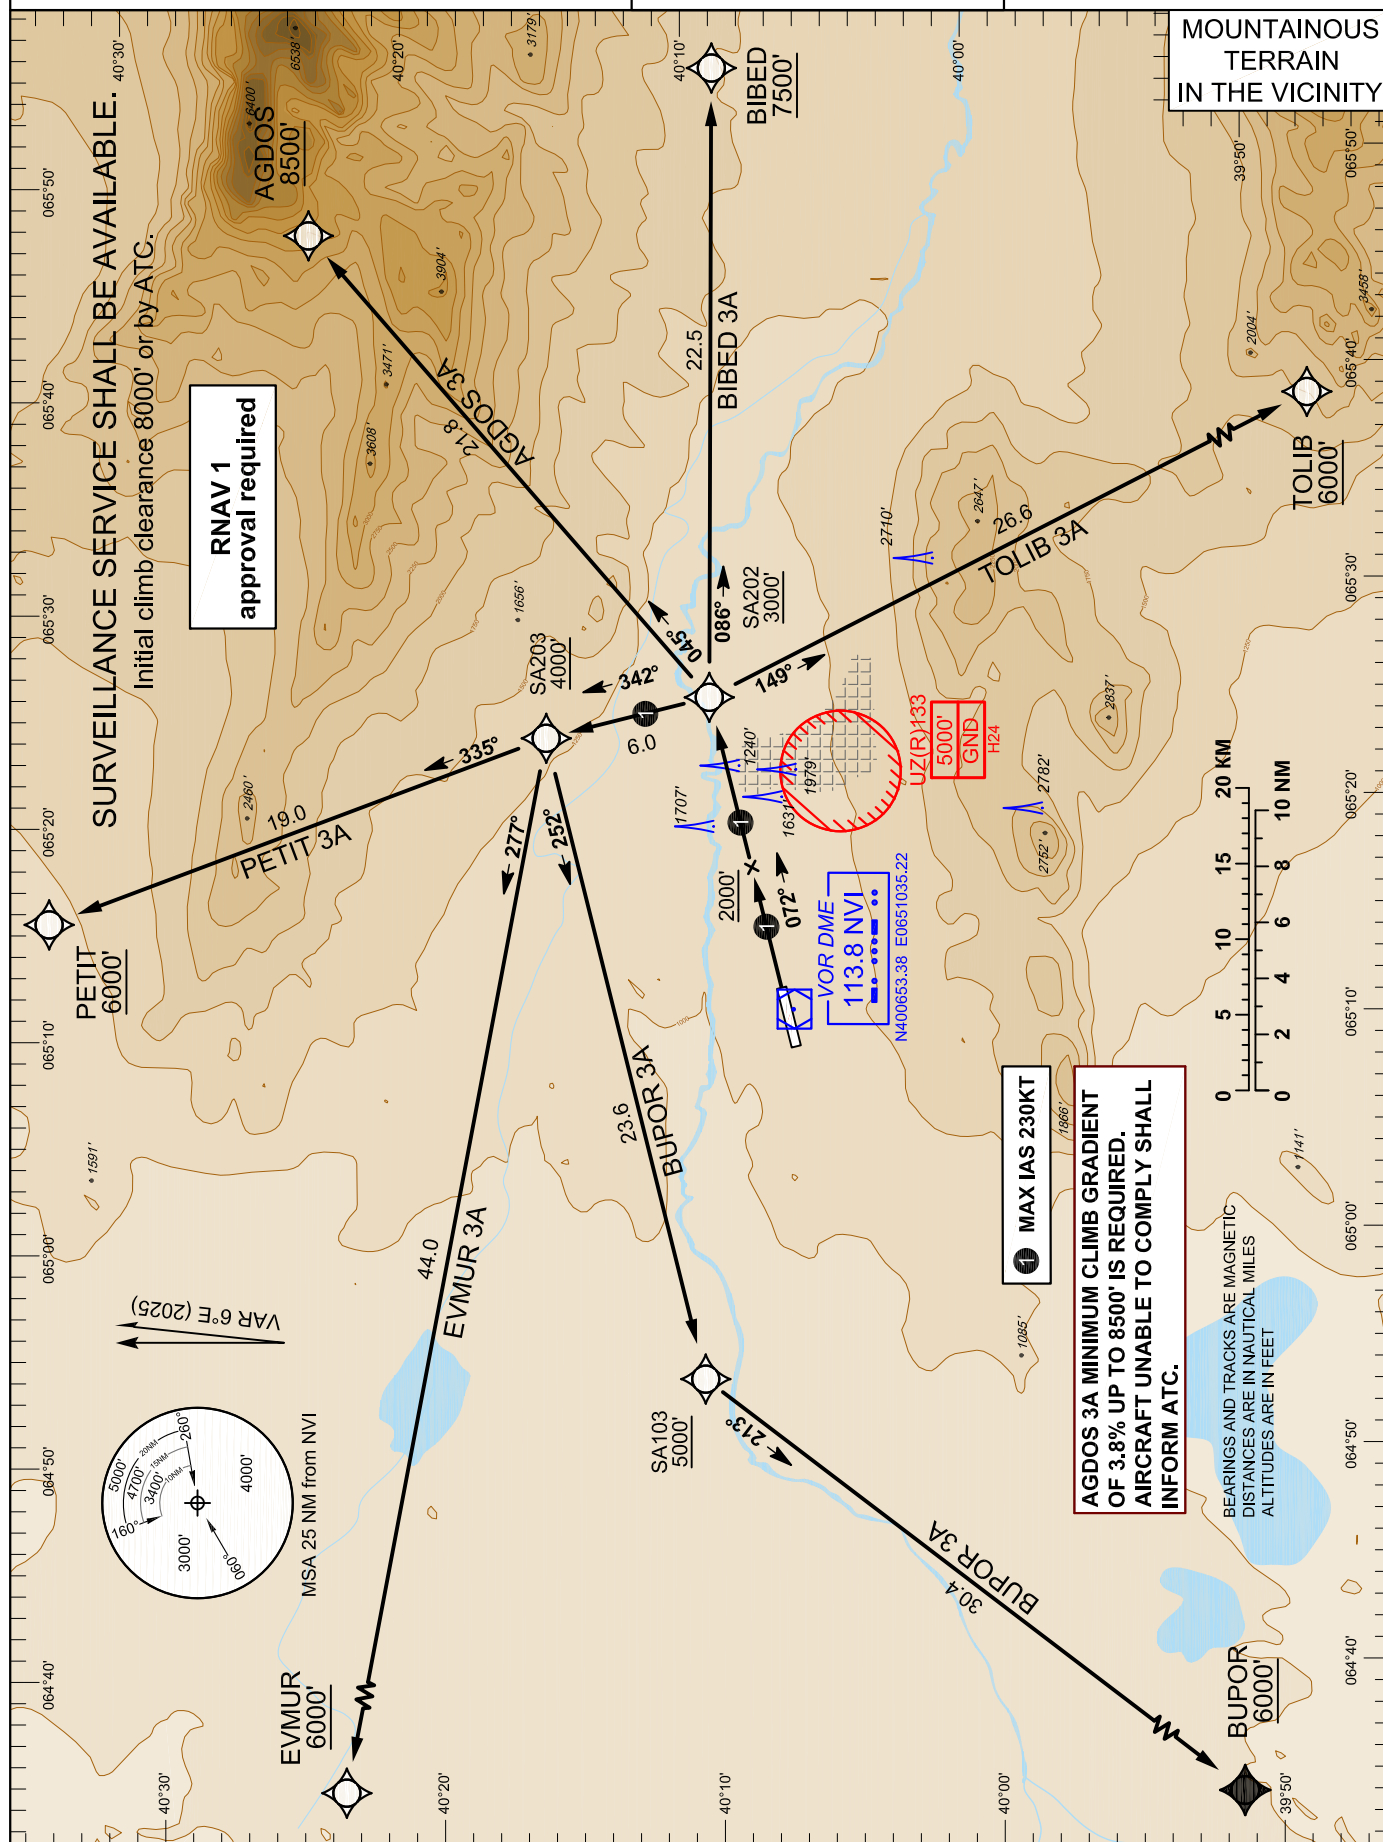

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY07**GENERAL:**

Surveillance service shall be available.
Initial climb clearance 8000' or instructed by ATC.
Maximum speed below 10000': IAS 250 KT unless otherwise stated
under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

AGDOS 3A

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	072 (077.5)	+5.6	-	-	+A2000	-230	RNAV 1	PDG 3.8% UP TO 8500'
CF	SA202	-	072 (077.5)	+5.6	-	-	+A3000	-230	RNAV 1	PDG 3.8% UP TO 8500'
TF	AGDOS	-	045 (050.6)	+5.6	21.8	L	+A8500	-	RNAV 1	PDG 3.8% UP TO 8500'

BIBED 3A

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	072 (077.5)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA202	-	072 (077.5)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	BIBED	-	086 (091.7)	+5.6	22.5	R	+A7500	-	RNAV 1	

BUPOR 3A

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	072 (077.5)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA202	-	072 (077.5)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA203	-	342 (347.5)	+5.6	6.0	L	+A4000	-230	RNAV 1	
TF	SA103	-	252 (257.6)	+5.6	23.6	L	+A5000	-	RNAV 1	
TF	BUPOR	-	213 (218.5)	+5.6	30.4	L	+A6000	-	RNAV 1	

EVMUR 3A

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	072 (077.5)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA202	-	072 (077.5)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA203	-	342 (347.5)	+5.6	6.0	L	+A4000	-230	RNAV 1	
TF	EVMUR	-	277 (282.3)	+5.6	44.0	L	+A6000	-	RNAV 1	

Continued on the next page

PETIT 3A

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	072 (077.5)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA202	-	072 (077.5)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA203	-	342 (347.5)	+5.6	6.0	L	+A4000	-230	RNAV 1	
TF	PETIT	-	335 (341.0)	+5.6	19.0	L	+A6000	-	RNAV 1	

TOLIB 3A

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	072 (077.5)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA202	-	072 (077.5)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	TOLIB	-	149 (154.5)	+5.6	26.6	R	+A6000	-	RNAV 1	