


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

AD ELEV 1417'
THR ELEV 26R/26L 1414'/1412'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

TASHKENT/UZTT ISLAM KARIMOV RNAV(GNSS) RWY26R/26L

BAMGU 2C, DIBAD 2C,
DILRO 2C, KUFIM 2C.

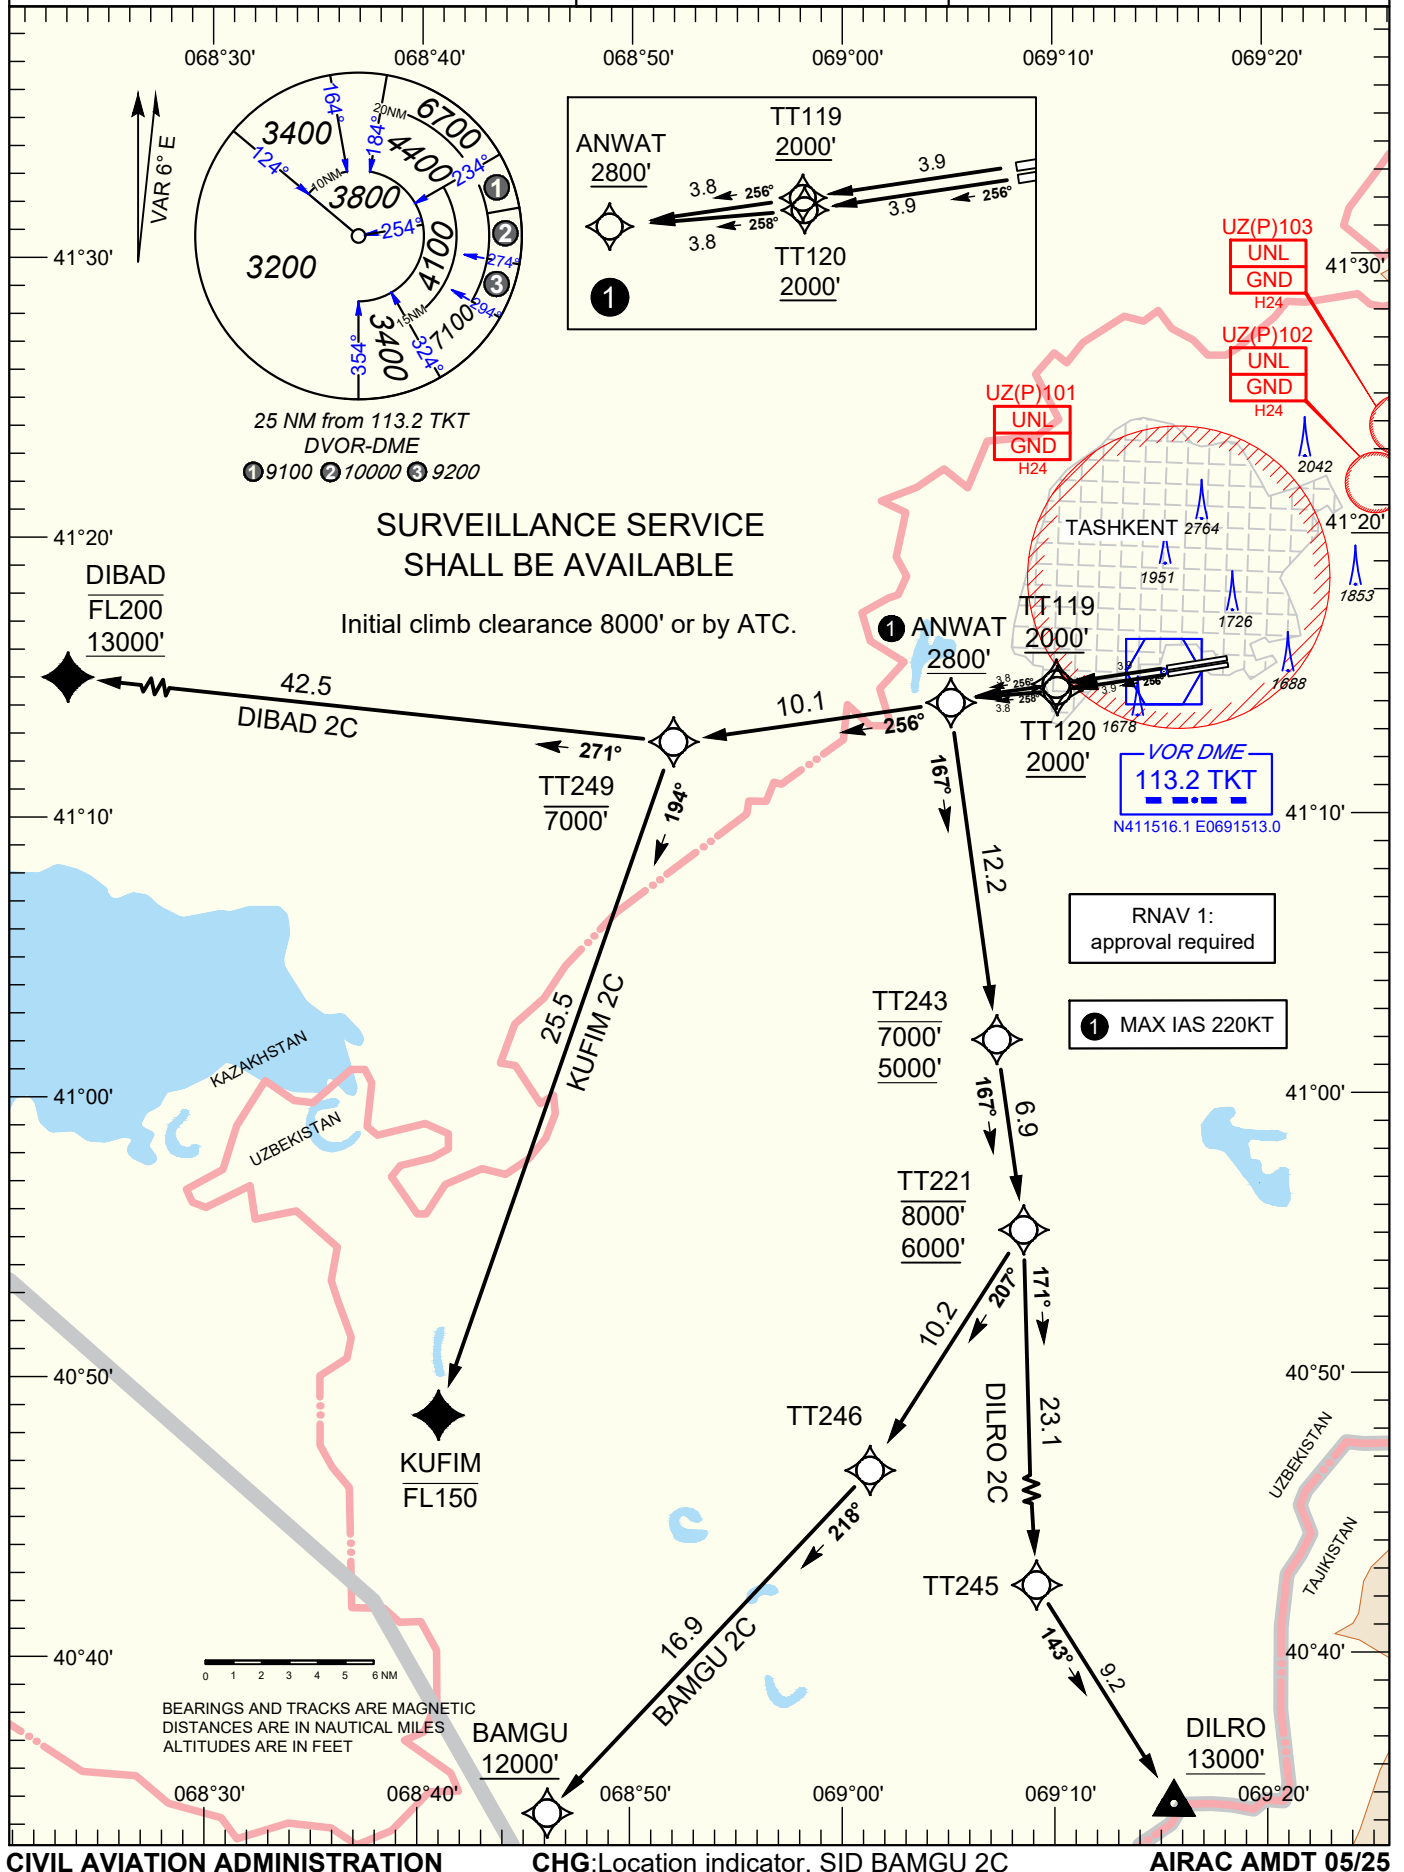

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY 26R/26L

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY26R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT119	-	256 (261.7)	+5.6	3.9	-	+A2000	-220	RNAV 1	
TF	ANWAT	-	256 (261.7)	+5.6	3.8	-	+A2800	-220	RNAV 1	

INITIAL CLIMB RWY26L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT120	-	256 (261.7)	+5.6	3.9	-	+A2000	-220	RNAV 1	
TF	ANWAT	-	258 (263.4)	+5.6	3.8	-	+A2800	-220	RNAV 1	

BAMGU 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A2800	-220	RNAV 1	
TF	TT243	-	167 (172.5)	+5.5	12.2	-	+A5000 -A7000	-	RNAV 1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A6000 -A8000	-	RNAV 1	
TF	TT246	-	207 (212.7)	+5.5	10.2	R	-	-	RNAV 1	
TF	BAMGU	-	218 (223.7)	+5.6	16.9	R	+A12000	-	RNAV 1	

DIBAD 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A2800	-220	RNAV 1	
TF	TT249	-	256 (261.3)	+5.5	10.1	-	-A7000	-	RNAV 1	
TF	DIBAD	-	271 (276.1)	+5.6	42.5	R	+A13000 -FL200	-	RNAV 1	

DILRO 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A2800	-220	RNAV 1	
TF	TT243	-	167 (172.5)	+5.5	12.2	L	+A5000 -A7000	-	RNAV 1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A6000 -A8000	-	RNAV 1	
TF	TT245	-	171 (176.9)	+5.5	23.1	R	-	-	RNAV 1	
TF	DILRO	-	143 (147.9)	+5.6	9.2	L	+A13000	-	RNAV 1	

KUFIM 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A2800	-220	RNAV 1	
TF	TT249	-	256 (261.3)	+5.5	10.1	-	-A7000	-	RNAV 1	
TF	KUFIM	-	194 (199.2)	+5.6	25.5	L	-FL150	-	RNAV 1	