


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 1417'
THR ELEV 26R/26L 1414'/1412'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

**TASHKENT/UZTT
ISLAM KARIMOV
RNAV(GNSS) RWY26R/26L**

ELMAL 2C, TISIB 2C.

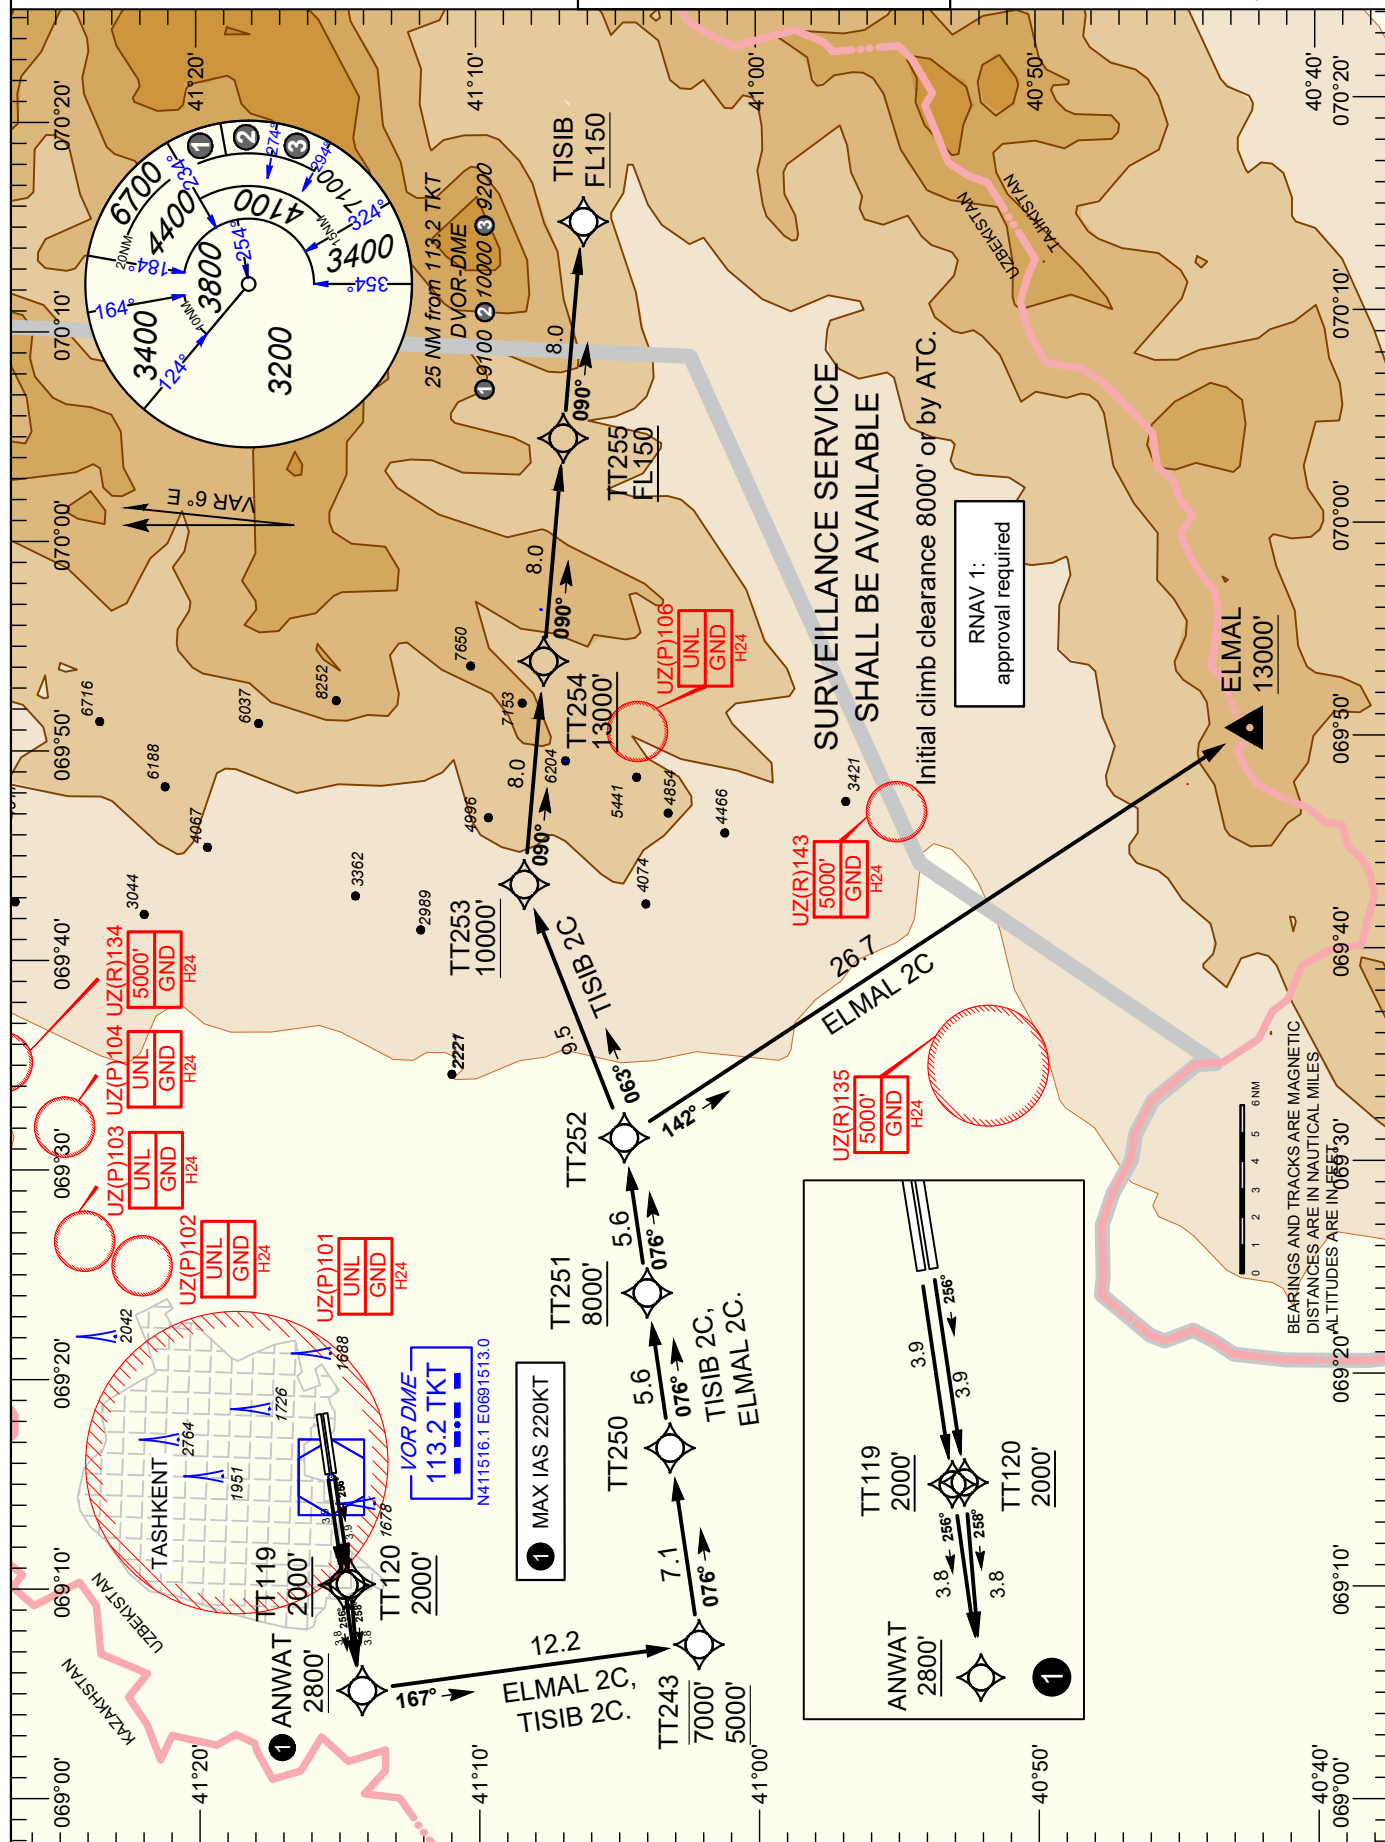

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY 26R/26L

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY26R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT119	-	256 (261.7)	+5.6	3.9	-	+A2000	-220	RNAV 1	
TF	ANWAT	-	256 (261.7)	+5.6	3.8	-	+A2800	-220	RNAV 1	

INITIAL CLIMB RWY26L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT120	-	256 (261.7)	+5.6	3.9	-	+A2000	-220	RNAV 1	
TF	ANWAT	-	258 (263.4)	+5.6	3.8	-	+A2800	-220	RNAV 1	

ELMAL 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A2800	-220	RNAV 1	
TF	TT243	-	167 (172.5)	+5.4	12.2	L	+A5000 -A7000	-	RNAV 1	
TF	TT250	-	076 (081.7)	+5.4	7.1	L	-	-	RNAV 1	
TF	TT251	-	076 (081.8)	+5.4	5.6	-	+A8000	-	RNAV 1	
TF	TT252	-	076 (081.9)	+5.4	5.6	-	-	-	RNAV 1	
TF	ELMAL	-	142 (147.1)	+5.4	26.7	R	+A13000	-	RNAV 1	

TISIB 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A2800	-220	RNAV 1	
TF	TT243	-	167 (172.5)	+5.4	12.2	L	+A5000 -A7000	-	RNAV 1	
TF	TT250	-	076 (081.7)	+5.4	7.1	L	-	-	RNAV 1	
TF	TT251	-	076 (081.8)	+5.4	5.6	-	+A8000	-	RNAV 1	
TF	TT252	-	076 (081.9)	+5.4	5.6	-	-	-	RNAV 1	
TF	TT253	-	063 (068.4)	+5.4	9.5	L	+A10000	-	RNAV 1	
TF	TT254	-	090 (095.4)	+5.4	8.0	R	+A13000	-	RNAV 1	
TF	TT255	-	090 (095.6)	+5.4	8.0	-	+FL150	-	RNAV 1	
TF	TISIB	-	090 (095.7)	+5.4	8.0	-	+FL150	-	RNAV 1	