


**TASHKENT/UZTP
VOSTOCHNY
RNAV(GNSS) RWY26**

ELMAL 2C, TISIB 2C.

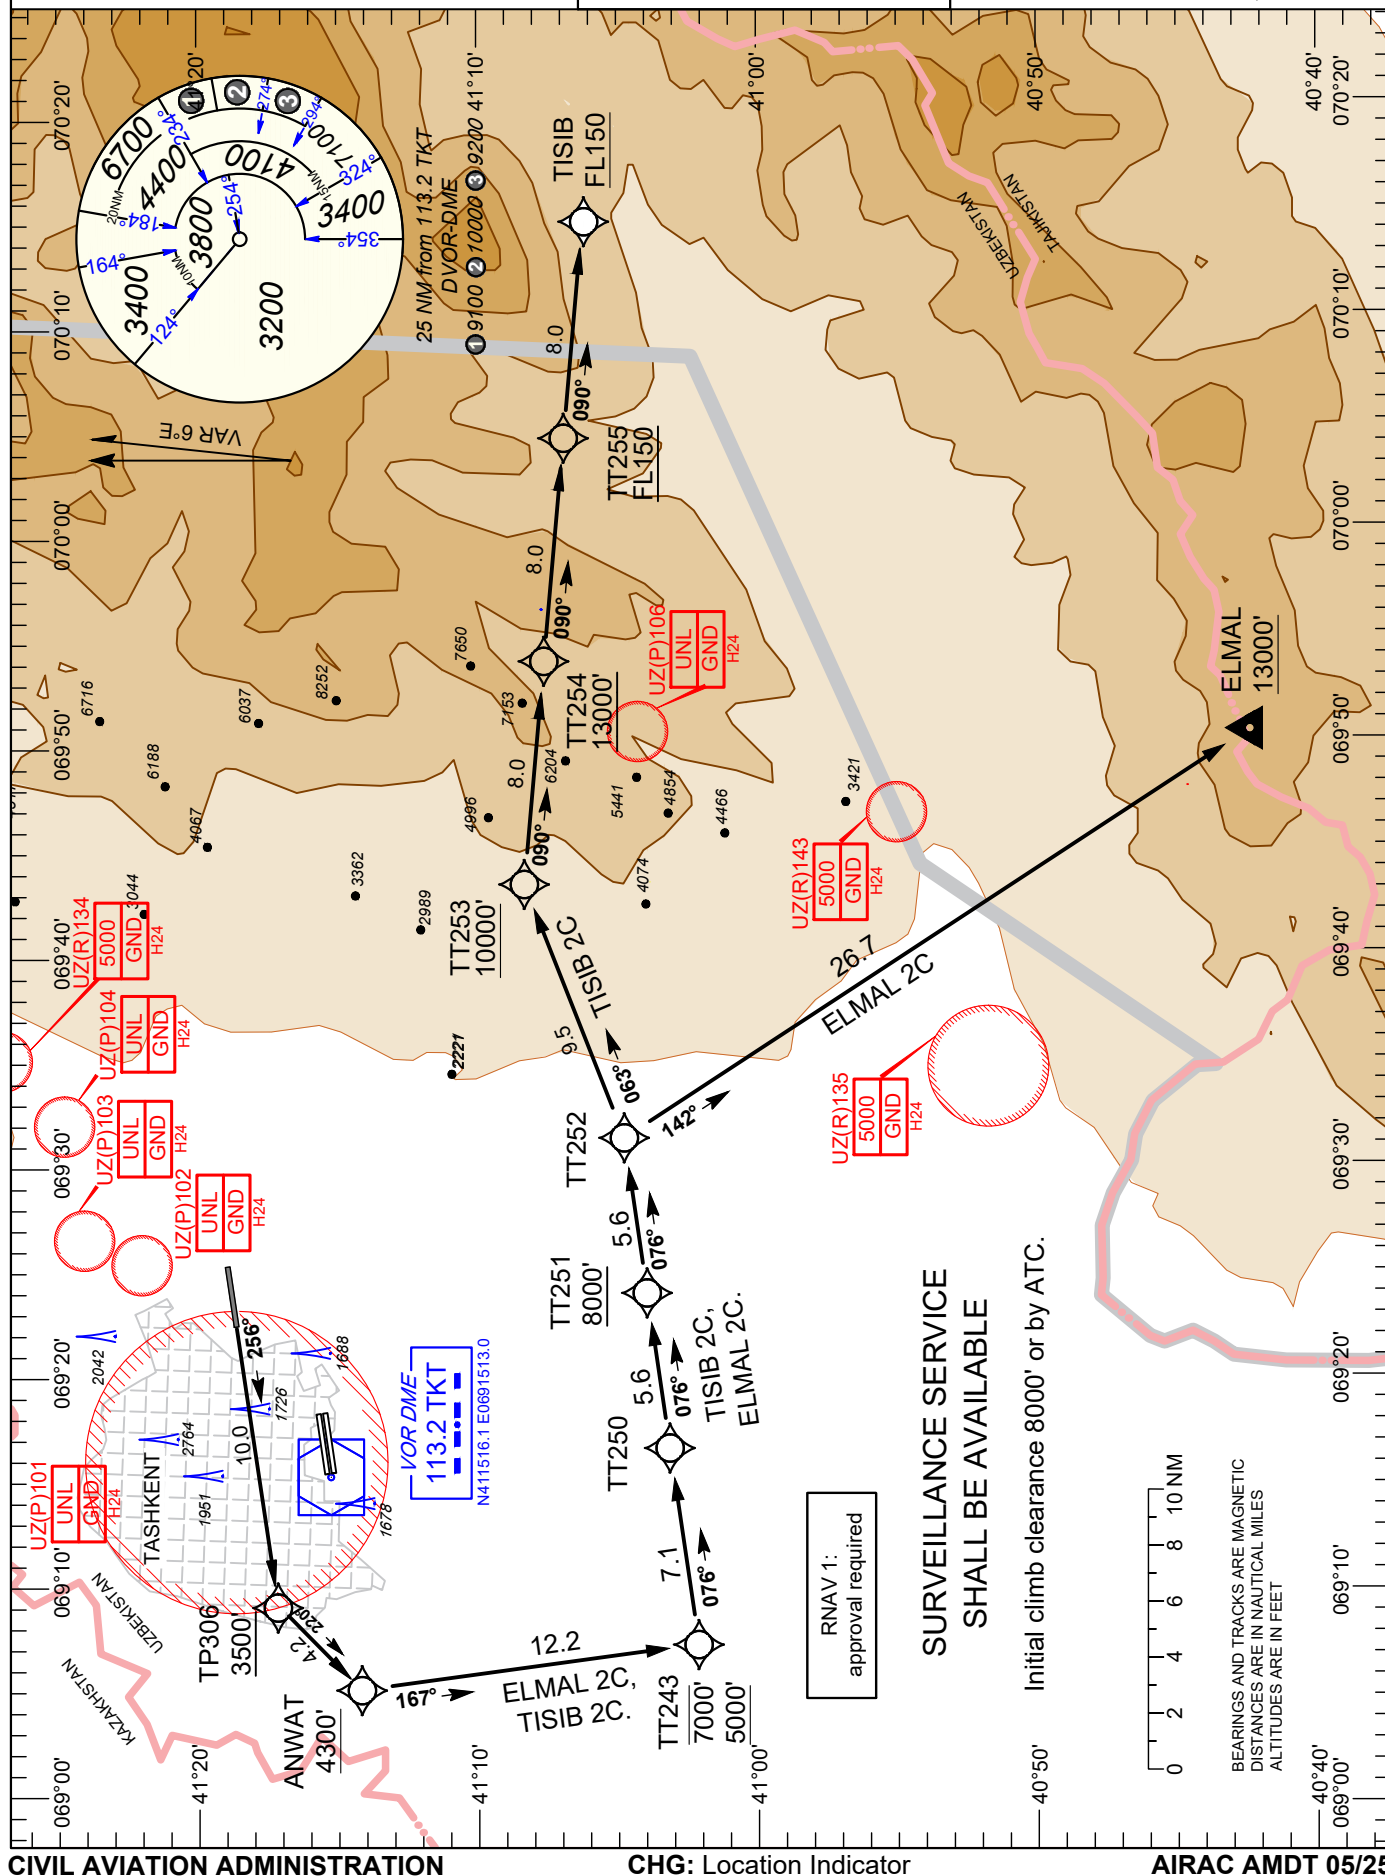

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY26

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY 26

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TP306	-	256 (261.8)	+5.6	10.0	-	+A3500	-	RNAV 1	
TF	ANWAT	-	220 (225.2)	+5.5	4.2	L	+A4300	-	RNAV 1	

ELMAL 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A4300	-	RNAV 1	
TF	TT243	-	167 (172.5)	+5.4	12.2	L	+A5000 -A7000	-	RNAV 1	
TF	TT250	-	076 (081.7)	+5.4	7.1	L	-	-	RNAV 1	
TF	TT251	-	076 (081.8)	+5.4	5.6	-	+A8000	-	RNAV 1	
TF	TT252	-	076 (081.9)	+5.4	5.6	-	-	-	RNAV 1	
TF	ELMAL	-	142 (147.1)	+5.4	26.7	R	+A13000	-	RNAV 1	

TISIB 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ANWAT	-	-	+5.5	-	-	+A4300	-	RNAV 1	
TF	TT243	-	167 (172.5)	+5.4	12.2	-	+A5000 -A7000	-	RNAV 1	
TF	TT250	-	076 (081.7)	+5.4	7.1	L	-	-	RNAV 1	
TF	TT251	-	076 (081.8)	+5.4	5.6	-	+A8000	-	RNAV 1	
TF	TT252	-	076 (081.9)	+5.4	5.6	-	-	-	RNAV 1	
TF	TT253	-	063 (068.4)	+5.4	9.5	L	+A10000	-	RNAV 1	
TF	TT254	-	090 (095.4)	+5.4	8.0	R	+A13000	-	RNAV 1	
TF	TT255	-	090 (095.6)	+5.4	8.0	-	+FL150	-	RNAV 1	
TF	TISIB	-	090 (095.7)	+5.4	8.0	-	+FL150	-	RNAV 1	