


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

AD ELEV 1417'
THR ELEV 08L/08R 1369'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

TASHKENT/UZTT ISLAM KARIMOV RNAV(GNSS) RWY08L/08R

BAMGU 2A, DIBAD 2A,
DILRO 2A, KUFIM 2A.

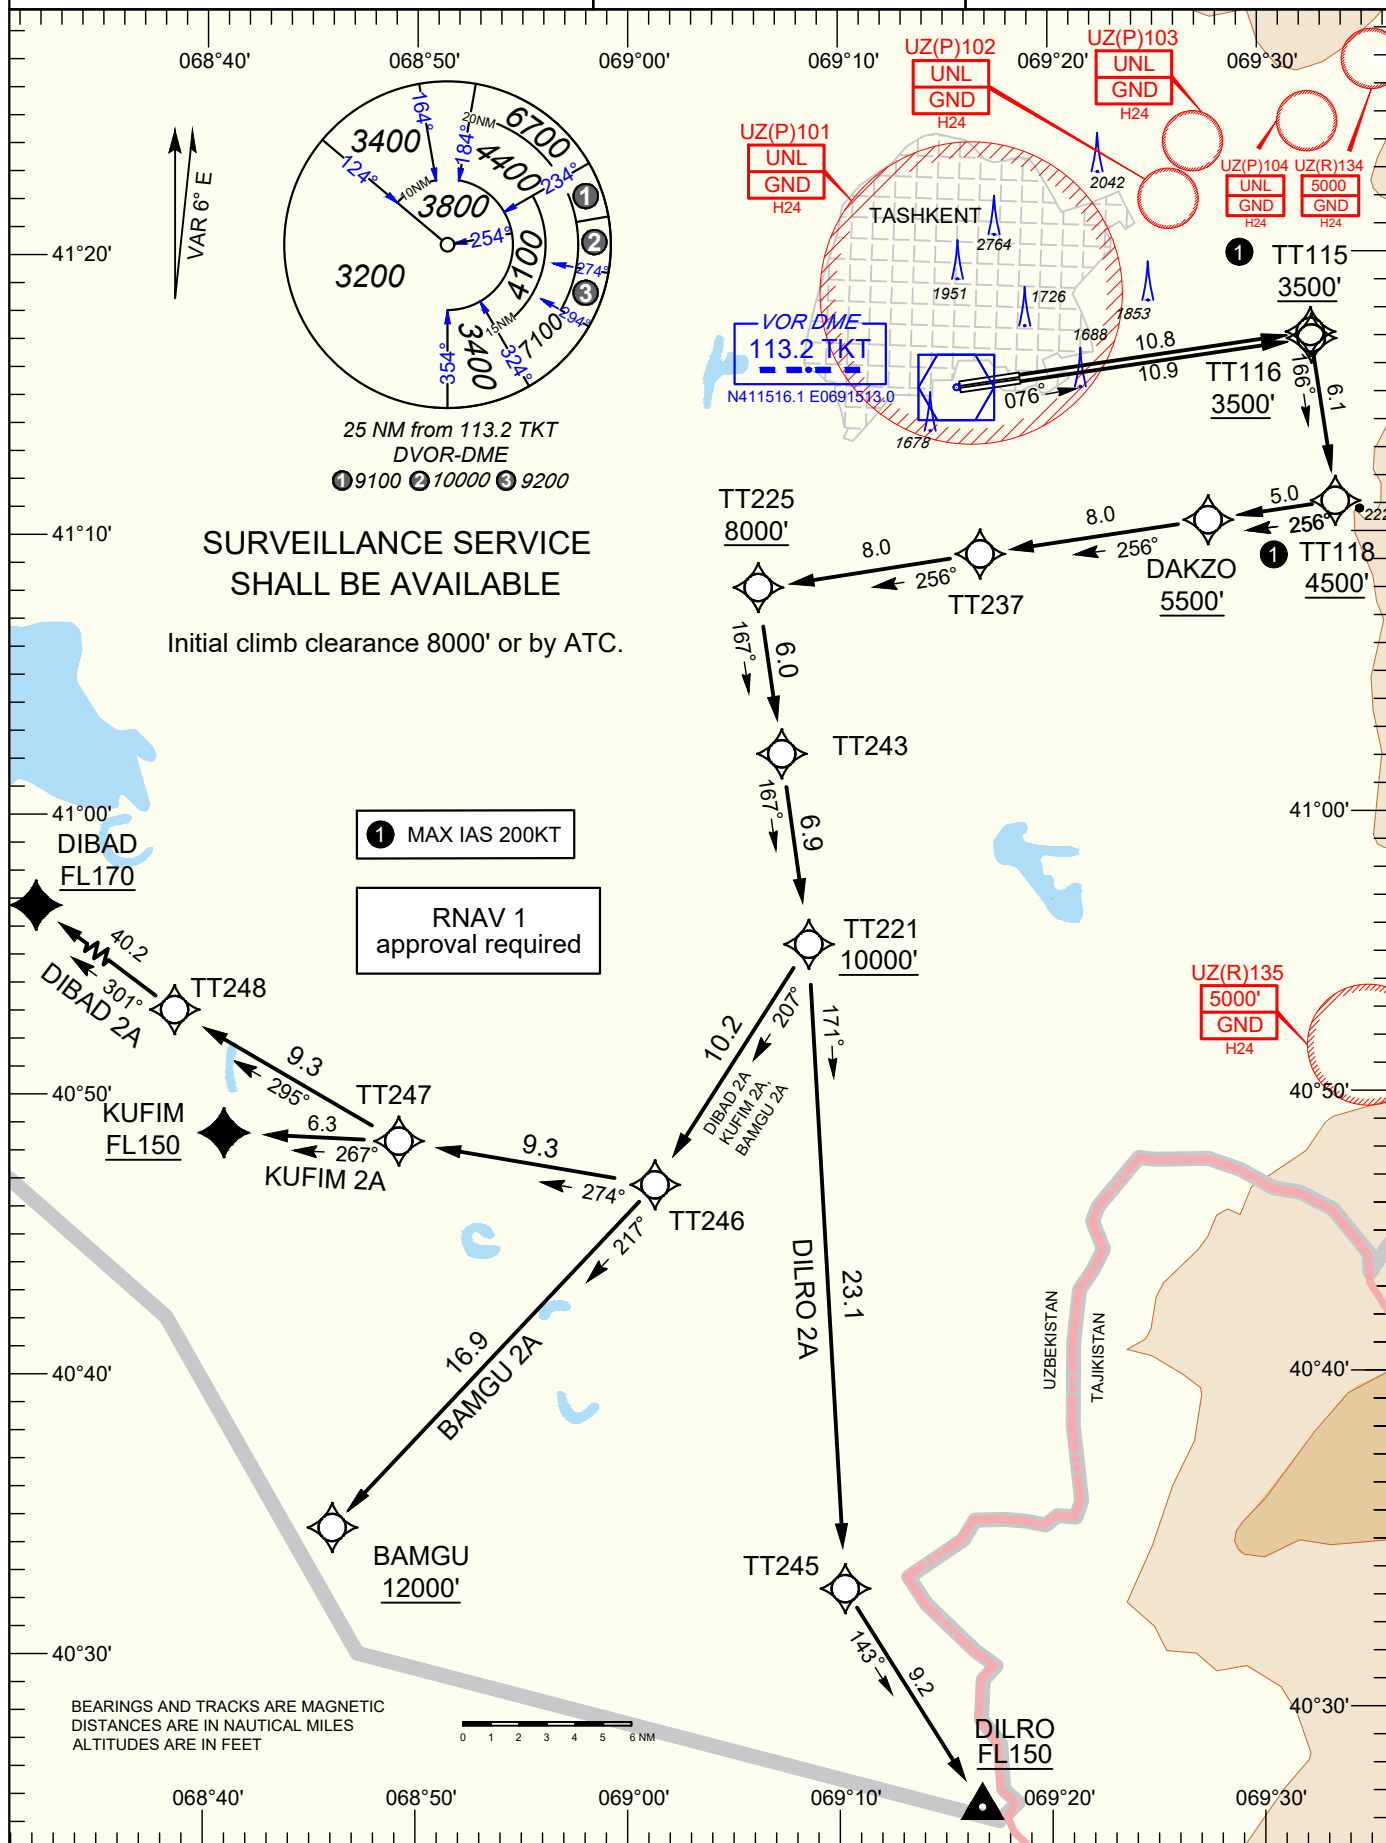

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY 08L/08R

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY08L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT115	-	076 (081.7)	+5.5	10.8	-	+A3500	-200	RNAV 1	
TF	TT118	-	166 (171.7)	+5.5	6.1	R	+A4500	-200	RNAV 1	
TF	DAKZO	-	256 (261.8)	+5.5	5.0	R	+A5500		RNAV 1	

INITIAL CLIMB RWY08R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT116	-	076 (081.7)	+5.5	10.9	-	+A3500	-200	RNAV 1	
TF	TT118	-	166 (171.7)	+5.5	6.0	R	+A4500	-200	RNAV 1	
TF	DAKZO	-	256 (261.8)	+5.5	5.0	R	+A5500		RNAV 1	

BAMGU 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	TT243	-	167 (172.0)	+5.5	6.0	L	-	-	RNAV1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A10000	-	RNAV1	
TF	TT246	-	207 (212.7)	+5.5	10.2	R	-	-	RNAV1	
TF	BAMGU	-	217(223.5)	+5.4	16.9	L	+A12000	-	RNAV1	

DIBAD 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	TT243	-	167 (172.0)	+5.5	6.0	L	-	-	RNAV1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A10000	-	RNAV1	
TF	TT246	-	207 (212.7)	+5.5	10.2	R	-	-	RNAV1	
TF	TT247	-	274 (279.7)	+5.4	9.3	R	-	-	RNAV1	
TF	TT248	-	295 (300.3)	+5.4	9.3	R	-	-	RNAV1	
TF	DIBAD	-	301 (306.9)	+5.4	40.2	R	+FL170	-	RNAV1	

DILRO 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	TT243	-	167 (172.0)	+5.5	6.0	L	-	-	RNAV1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A10000	-	RNAV1	
TF	TT245	-	171(176.9)	+5.5	23.1	R	-	-	RNAV1	
TF	DILRO	-	143(147.9)	+5.3	9.2	L	+FL150	-	RNAV1	

KUFIM 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-	RNAV1	
TF	TT243	-	167 (172.0)	+5.5	6.0	L	-	-	RNAV1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A10000	-	RNAV1	
TF	TT246	-	207 (212.7)	+5.5	10.2	R	-	-	RNAV1	
TF	TT247	-	274 (279.7)	+5.4	9.3	R	-	-	RNAV1	
TF	KUFIM	-	267(272.7)	+5.4	6.3	L	+FL150	-	RNAV1	