


ATIS	126.8
TASHKENT APPROACH	119.4
	122.9
TASHKENT TOWER	120.4
VOLMET	113.2

AD ELEV	1417'
THR ELEV 08L/08R	1369'
TRANSITION LEVEL	FL150
TRANSITION ALTITUDE	13000'

**TASHKENT/UZTT
ISLAM KARIMOV
RNAV(GNSS) RWY08L/08R**

ELMAL 2A, TISIB 2A.

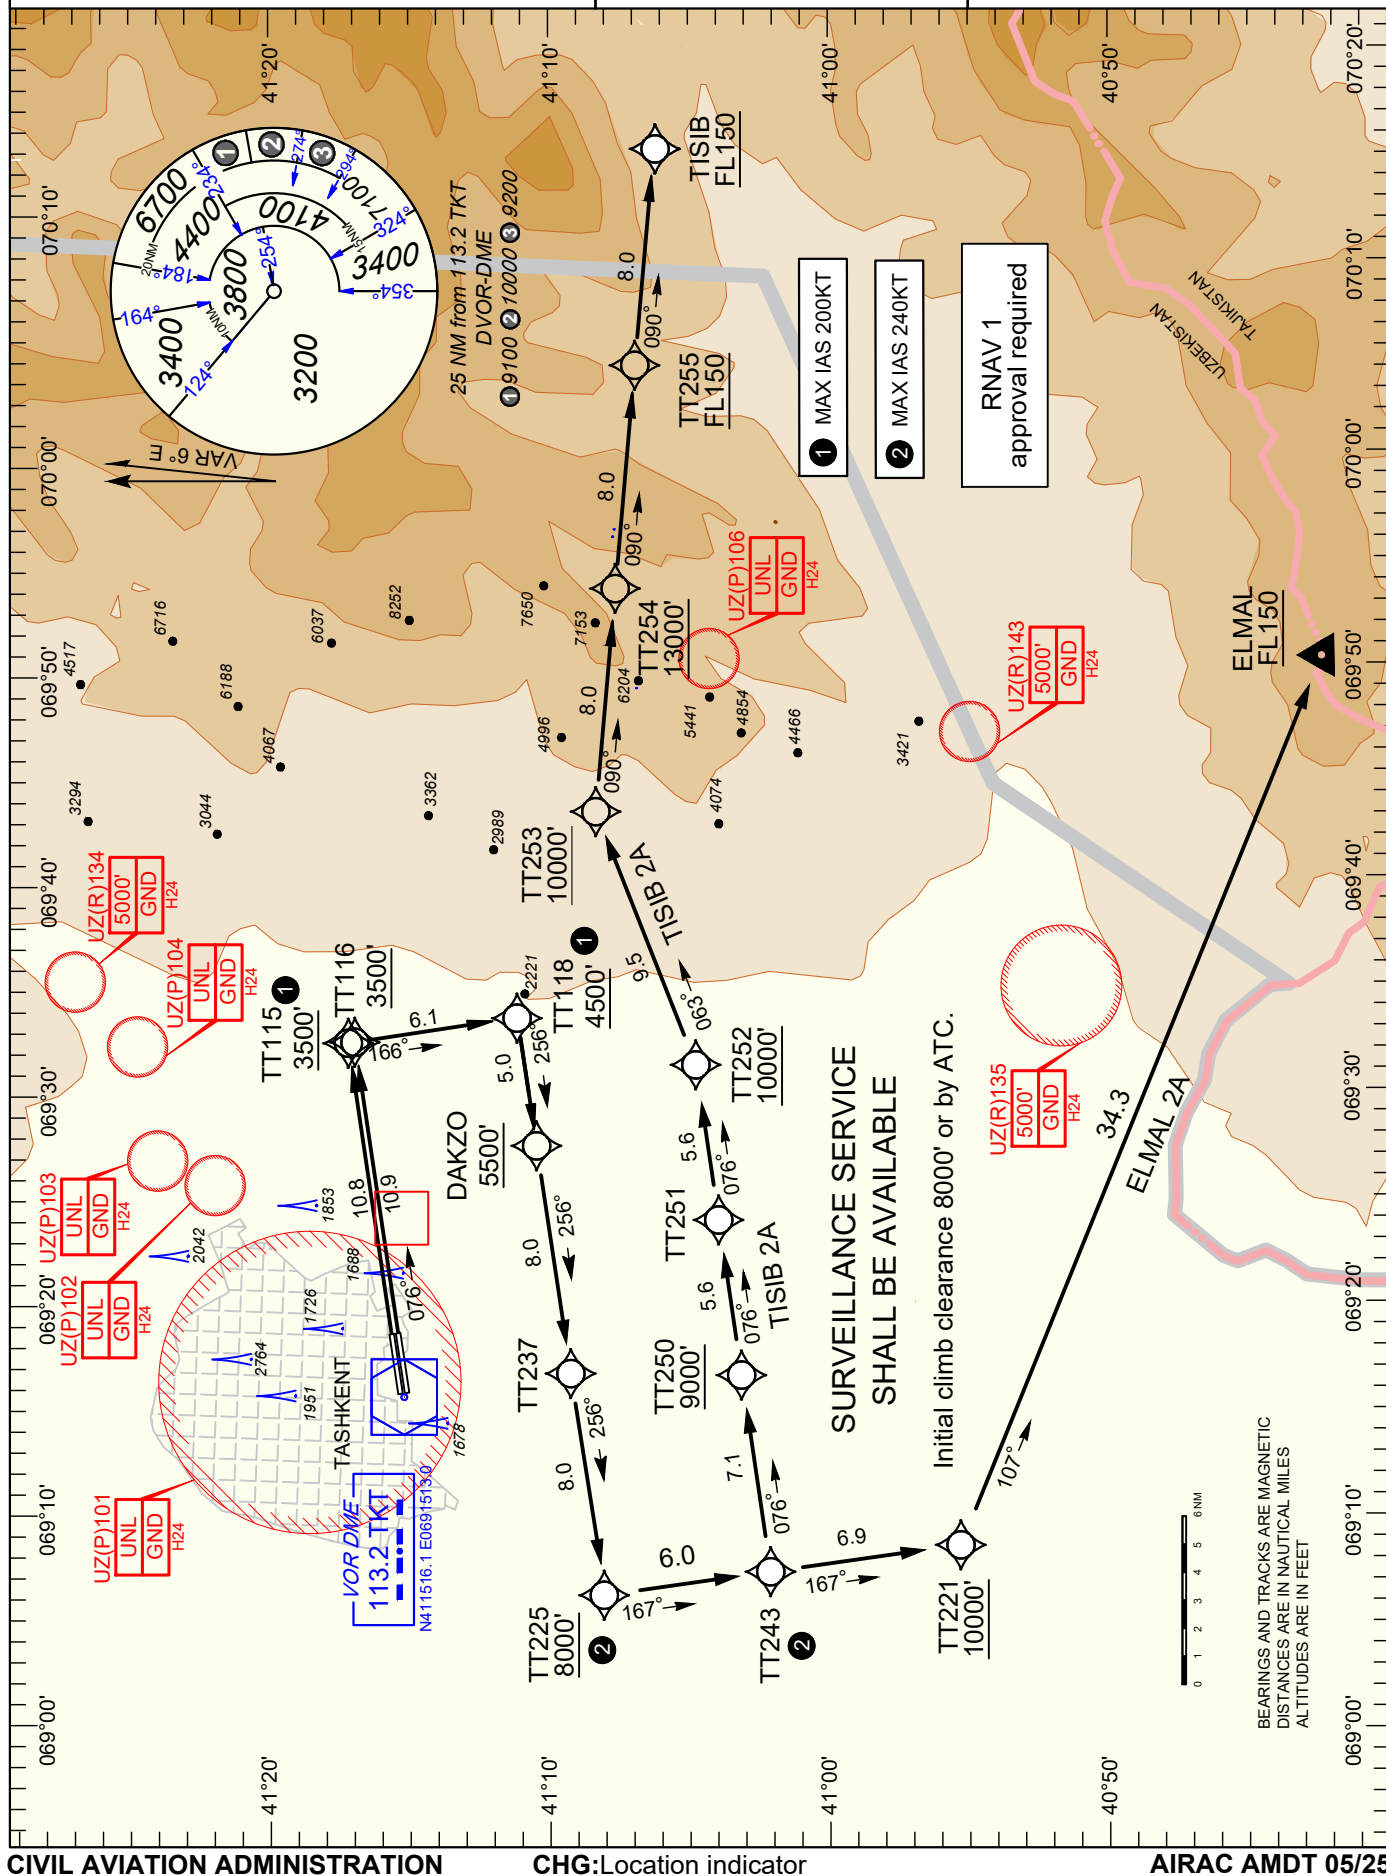

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY 08L/08R

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY08L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT115	-	076 (081.7)	+5.5	10.8	-	+A3500	-200	RNAV 1	
TF	TT118	-	166 (171.7)	+5.5	6.1	R	+A4500	-200	RNAV 1	
TF	DAKZO	-	256 (261.8)	+5.5	5.0	R	+A5500		RNAV 1	

INITIAL CLIMB RWY08R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT116	-	076 (081.7)	+5.5	10.9	-	+A3500	-200	RNAV 1	
TF	TT118	-	166 (171.7)	+5.5	6.0	R	+A4500	-200	RNAV 1	
TF	DAKZO	-	256 (261.8)	+5.5	5.0	R	+A5500	-	RNAV 1	

ELMAL 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-240	RNAV1	
TF	TT243	-	167 (172.0)	+5.5	6.0	L	-	-240	RNAV1	
TF	TT221	-	167 (172.0)	+5.5	6.9	-	+A10000	-	RNAV1	
TF	ELMAL	-	107 (112.1)	+5.4	34.3	L	+FL150	-	RNAV1	

TISIB 2A

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DAKZO	-	-	+5.5	-	-	+A5500	-	RNAV1	
TF	TT237	-	256 (261.7)	+5.5	8.0	-	-	-	RNAV1	
TF	TT225	-	256 (261.6)	+5.5	8.0	-	+A8000	-240	RNAV1	
TF	TT243	-	167 (172.0)	+5.5	6.0	L	-	-240	RNAV1	
TF	TT250	-	076 (081.7)	+5.5	7.1	L	+A9000	-	RNAV1	
TF	TT251	-	076 (081.8)	+5.5	5.6	-	-	-	RNAV1	
TF	TT252	-	076 (081.9)	+5.4	5.6	-	+A10000	-	RNAV1	
TF	TT253	-	063 (068.9)	+5.4	9.5	L	+A10000	-	RNAV1	
TF	TT254	-	090 (095.4)	+5.4	8.0	R	+A13000	-	RNAV1	
TF	TT255	-	090 (095.6)	+5.4	8.0	-	+FL150	-	RNAV1	
TF	TISIB	-	090 (095.7)	+5.4	8.0	-	+FL150	-	RNAV1	