


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 1142'
THR ELEV 1140'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

BUKHARA APPROACH 124.6
NAVOI TOWER 132.0
VOLMET (english only) 113.8

**NAVOI/UZSA
RNAV (GNSS) RWY25**

AGDOS 3C, BIBED 3C,
BUPOR 3C, EVMUR 3C,
PETIT 3C, TOLIB 3C.

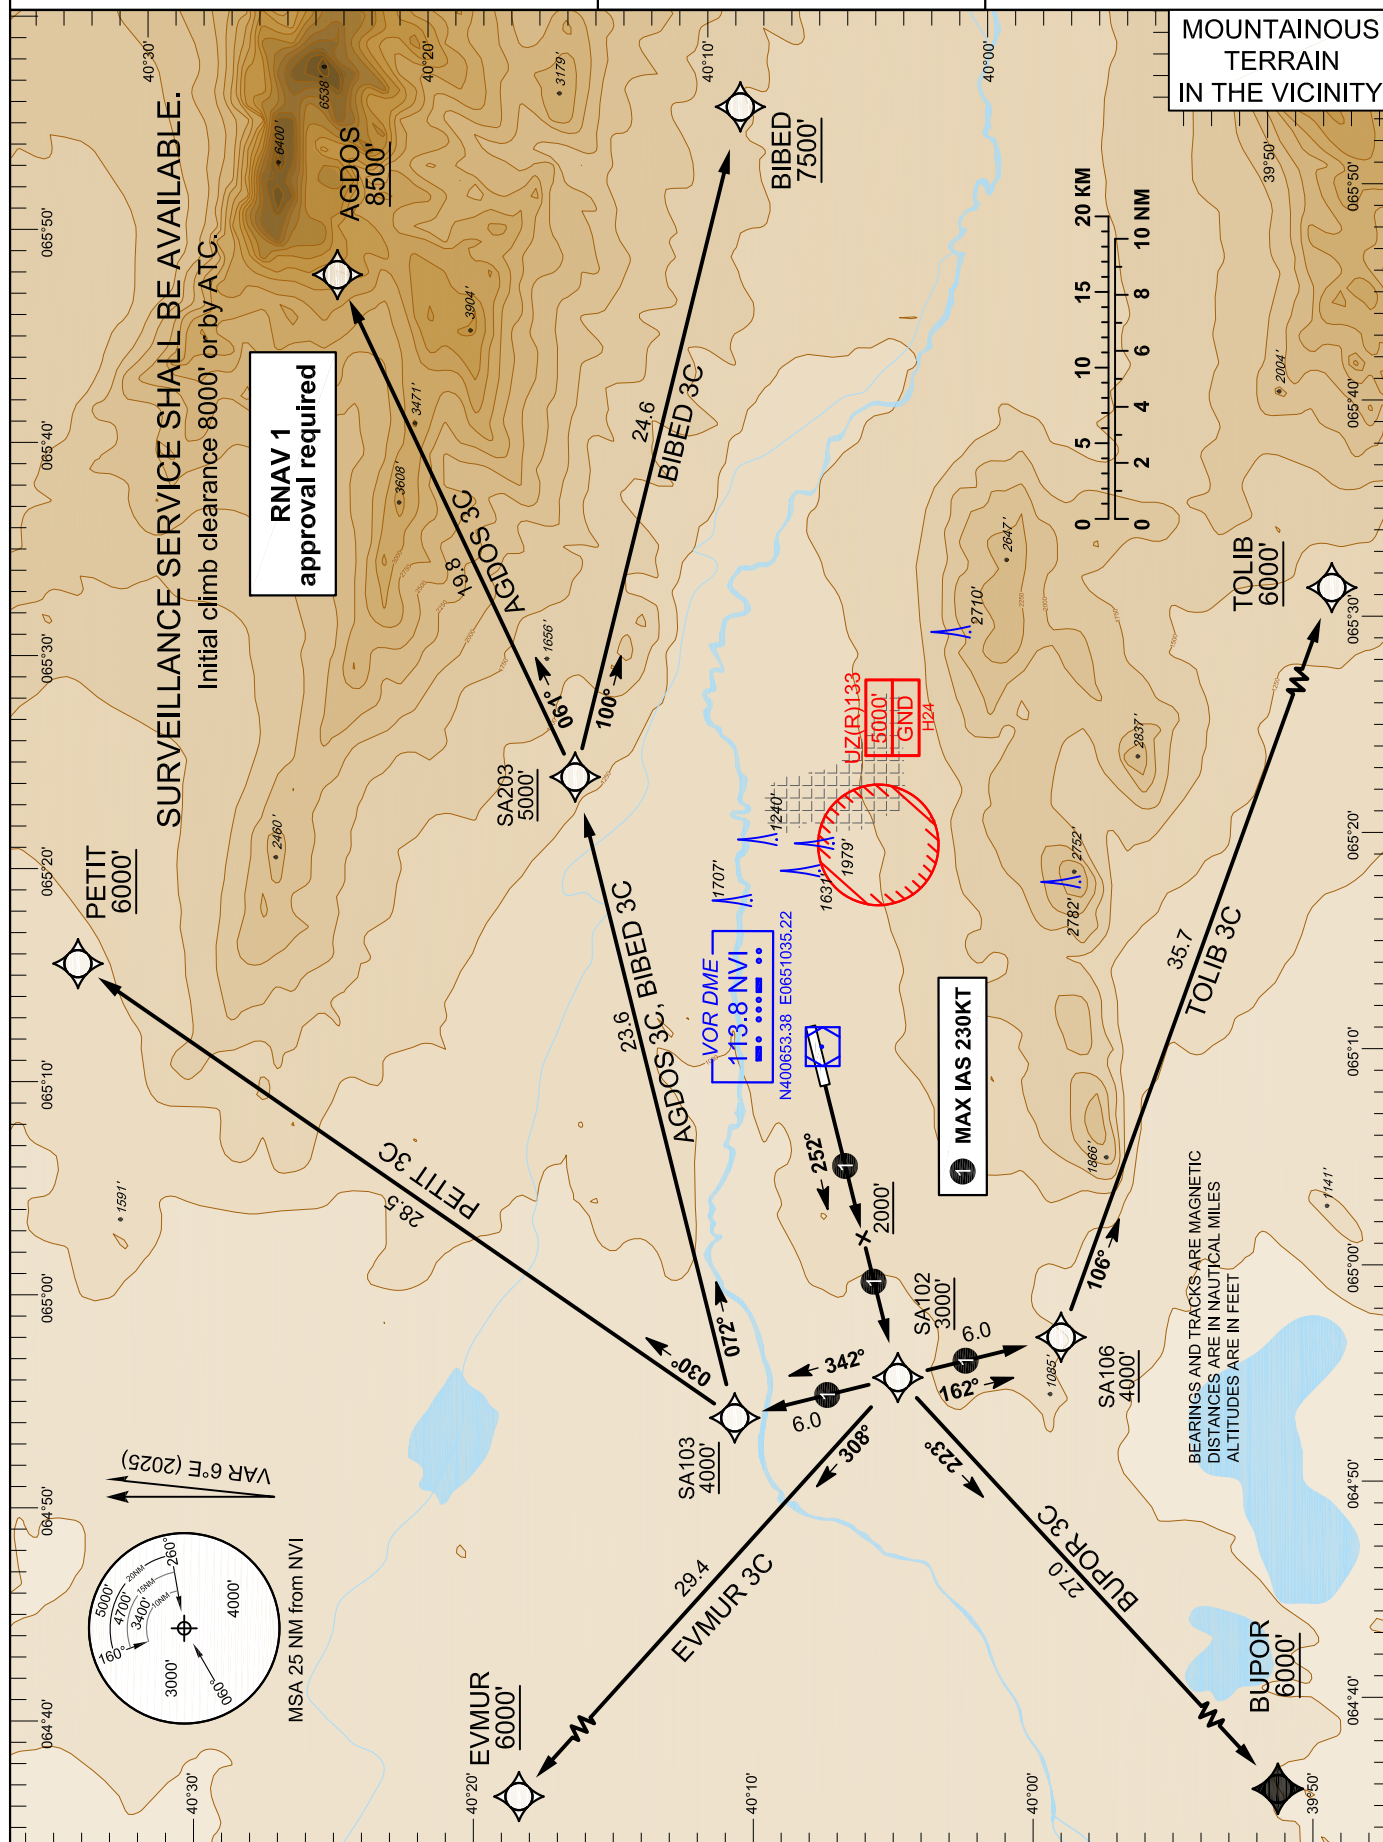

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY25**GENERAL:**

Surveillance service shall be available.

Initial climb clearance 8000' or instructed by ATC.

Maximum speed below 10000': IAS 250 KT unless otherwise stated under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

AGDOS 3C

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	252 (257.4)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA102	-	252 (257.4)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA103	-	342 (347.3)	+5.6	6.0	R	+A4000	-230	RNAV 1	
TF	SA203	-	072 (077.2)	+5.6	23.6	R	+A5000	-	RNAV 1	
TF	AGDOS	-	061 (066.2)	+5.6	19.8	L	+A8500	-	RNAV 1	

BIBED 3C

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	252 (257.4)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA102	-	252 (257.4)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA103	-	342 (347.3)	+5.6	6.0	R	+A4000	-230	RNAV 1	
TF	SA203	-	072 (077.2)	+5.6	23.6	R	+A5000	-	RNAV 1	
TF	BIBED	-	100 (105.4)	+5.6	24.6	R	+A7500	-	RNAV 1	

BUPOR 3C

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	252 (257.4)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA102	-	252 (257.4)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	BUBOR	-	223 (228.5)	+5.6	27.0	L	+A6000	-	RNAV 1	

EVMUR 3C

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	252 (257.4)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA102	-	252 (257.4)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	EVMUR	-	308 (313.4)	+5.6	29.4	R	+A6000	-	RNAV 1	

Continued on the next page

PETIT 3C

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	252 (257.4)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA102	-	252 (257.4)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA103	-	342 (347.3)	+5.6	6.0	R	+A4000	-230	RNAV 1	
TF	PETIT	-	030 (035.9)	+5.6	28.5	R	+A6000	-	RNAV 1	

TOLIB 3C

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	252 (257.4)	+5.6	-	-	+A2000	-230	RNAV 1	
CF	SA102	-	252 (257.4)	+5.6	-	-	+A3000	-230	RNAV 1	
TF	SA106	-	162 (167.3)	+5.6	6.0	L	+A4000	-230	RNAV 1	
TF	TOLIB	-	106 (111.1)	+5.6	35.7	L	+A6000	-	RNAV 1	