


STANDARD ARRIVAL CHART INSTRUMENT (STAR) - ICAO

AD ELEV 1417'
THR ELEV 08L/08R 1369'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

TASHKENT/UZTT ISLAM KARIMOV RNAV(GNSS) RWY08L/08R

DIBAD 2W, DOSOR 2W, KUFIM 2W,
MIKNO 2W, NIMAG 2W, OGRIP 2W.

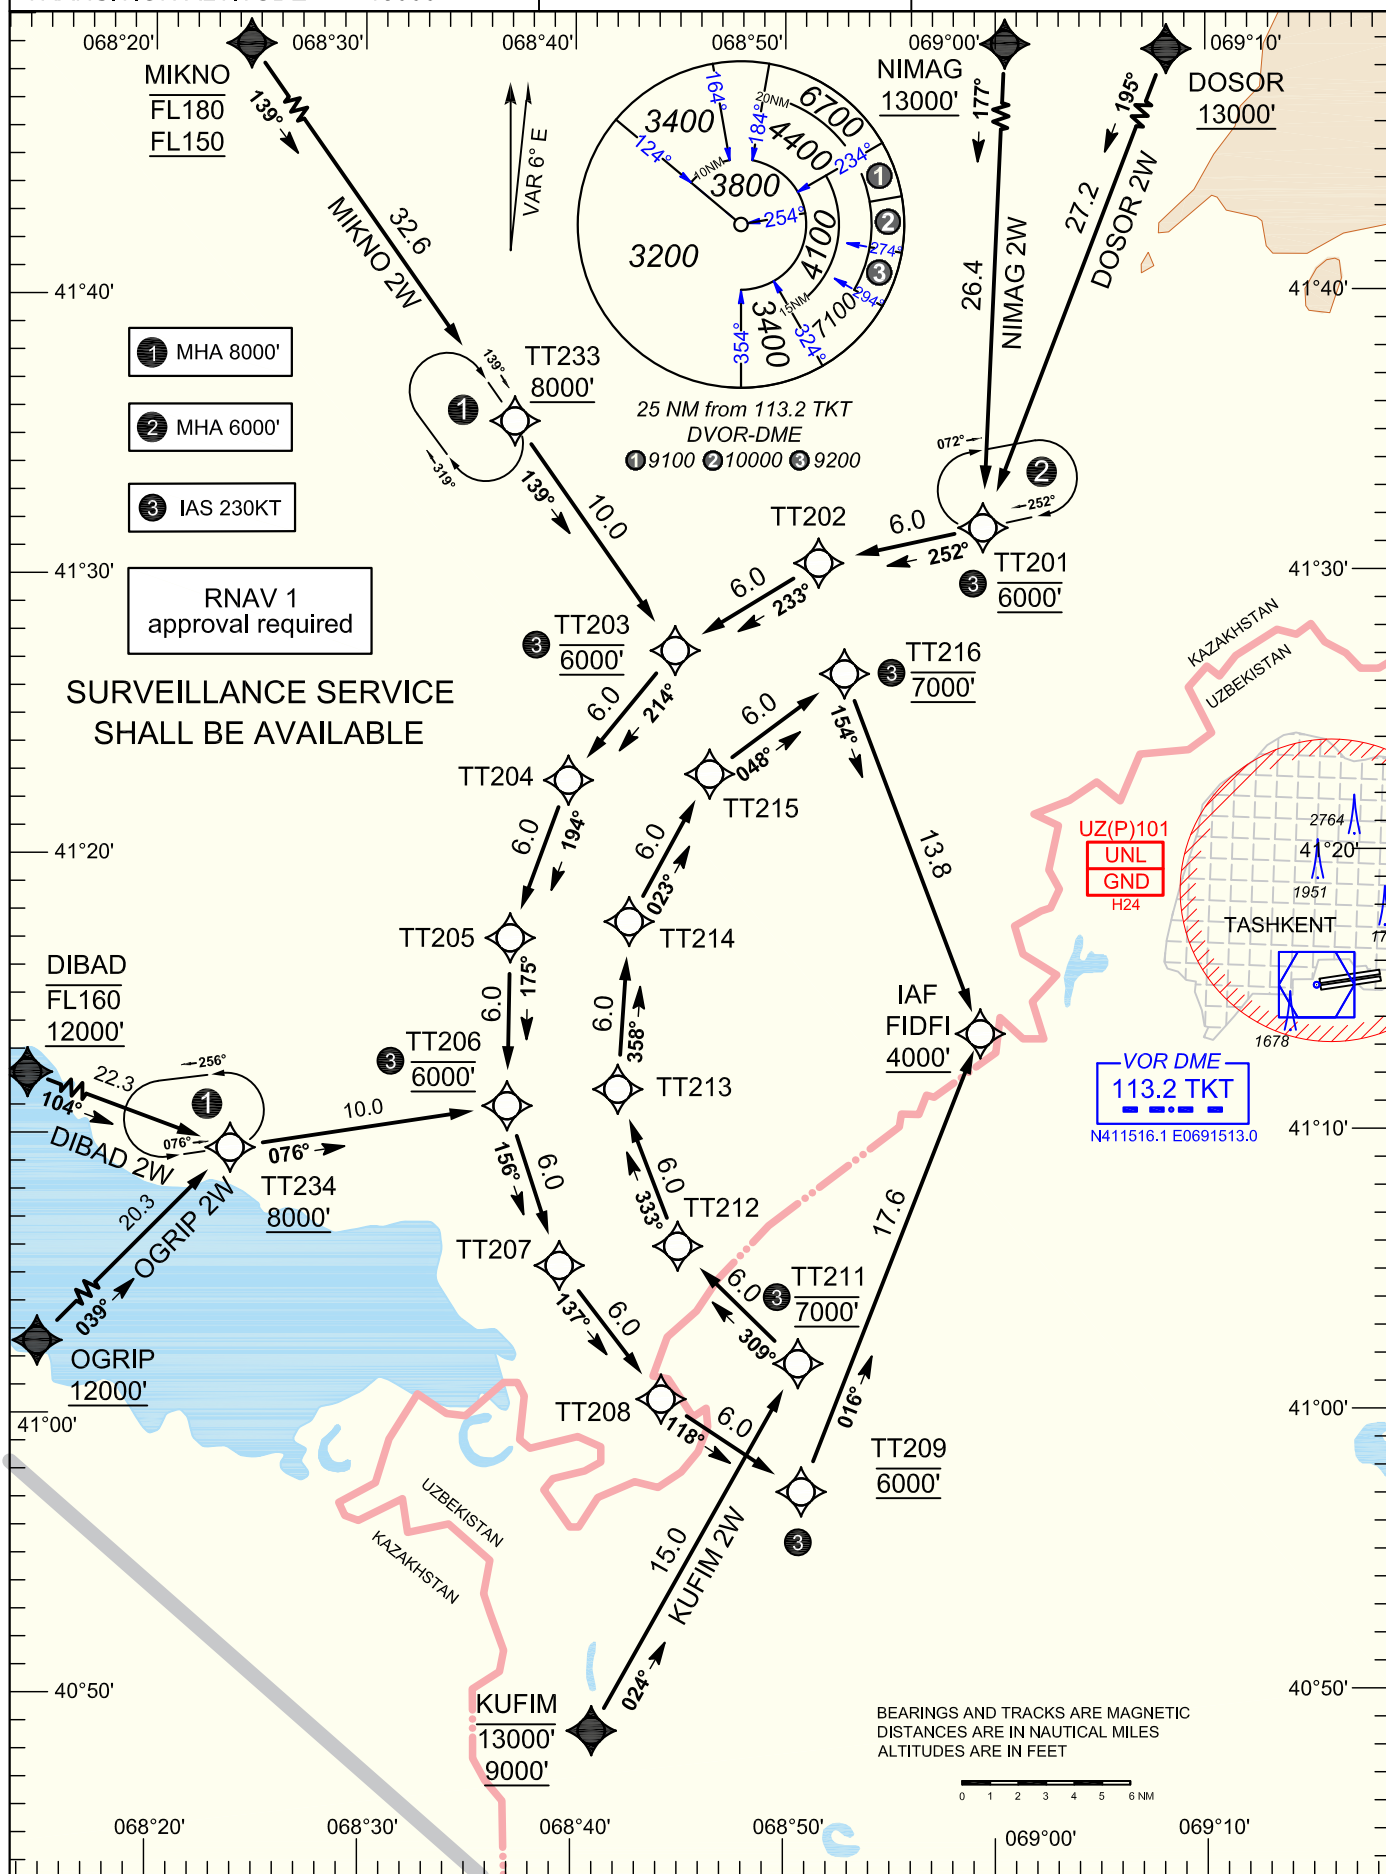

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY08L/08R

GENERAL: Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

DIBAD 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DIBAD	-	-	+5.7	-	-	-FL160 +A12000	-	RNAV1	
TF	TT234	-	104 (109.8)	+5.5	22.3	-	+A8000	-	RNAV1	
TF	TT206	-	076 (081.1)	+5.5	10.0	L	@A6000	@230	RNAV1	
TF	TT207	-	156 (161.6)	+5.5	6.0	R	@A6000	@230	RNAV1	
TF	TT208	-	137 (142.5)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT209	-	118 (123.4)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	FIDFI	-	016 (021.5)	+5.5	17.6	L	+A4000	-	RNAV1	

DOSOR 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DOSOR	-	-	+5.8	-	-	+A13000	-	RNAV1	
TF	TT201	-	195 (201.0)	+5.7	27.2	-	@A6000	@230	RNAV1	
TF	TT202	-	252 (257.8)	+5.7	6.0	R	@A6000	@230	RNAV1	
TF	TT203	-	233 (238.6)	+5.7	6.0	L	@A6000	@230	RNAV1	
TF	TT204	-	214 (219.3)	+5.7	6.0	L	@A6000	@230	RNAV1	
TF	TT205	-	194 (200.1)	+5.6	6.0	L	@A6000	@230	RNAV1	
TF	TT206	-	175 (180.8)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT207	-	156 (161.6)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT208	-	137 (142.5)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT209	-	118 (123.4)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	FIDFI	-	016 (021.5)	+5.5	17.6	L	+A4000	-	RNAV1	

KUFIM 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	KUFIM	-	-	+5.4	-	-	-A13000 +A9000	-	RNAV1	
TF	TT211	-	024 (029.2)	+5.5	15.0	-	@A7000	@230	RNAV1	
TF	TT212	-	309 (314.3)	+5.5	6.0	L	@A7000	@230	RNAV1	
TF	TT213	-	333 (339.0)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT214	-	358 (003.7)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT215	-	023 (028.4)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT216	-	048 (053.2)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	FIDFI	-	154 (159.1)	+5.5	13.8	R	+A4000	-	RNAV1	

Continued on the next page

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY08L/08R (CONT)

GENERAL:

Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

MIKNO 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	MIKNO	-	-	+5.8	-	-	-FL180 +FL150	-	RNAV1	
TF	TT233	-	139 (144.6)	+5.7	32.6	-	+A8000	-	RNAV1	
TF	TT203	-	139 (144.9)	+5.7	10.0	-	@A6000	@230	RNAV1	
TF	TT204	-	214 (219.3)	+5.7	6.0	R	@A6000	@230	RNAV1	
TF	TT205	-	194 (200.1)	+5.6	6.0	L	@A6000	@230	RNAV1	
TF	TT206	-	175 (180.8)	+5.6	6.0	L	@A6000	@230	RNAV1	
TF	TT207	-	156 (161.6)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT208	-	137 (142.5)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT209	-	118 (123.4)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	FIDFI	-	016 (021.5)	+5.5	17.6	L	+A4000	-	RNAV1	

NIMAG 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	NIMAG	-	-	+5.8	-	-	+A13000	-	RNAV1	
TF	TT201	-	177 (182.6)	+5.7	26.4	-	@A6000	@230	RNAV1	
TF	TT202	-	252 (257.8)	+5.7	6.0	R	@A6000	@230	RNAV1	
TF	TT203	-	233 (238.6)	+5.7	6.0	L	@A6000	@230	RNAV1	
TF	TT204	-	214 (219.3)	+5.7	6.0	L	@A6000	@230	RNAV1	
TF	TT205	-	194 (200.1)	+5.6	6.0	L	@A6000	@230	RNAV1	
TF	TT206	-	175 (180.8)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT207	-	156 (161.6)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT208	-	137 (142.5)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT209	-	118 (123.4)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	FIDFI	-	016 (021.5)	+5.5	17.6	L	+A4000	-	RNAV1	

OGRIP 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	OGRIP	-	-	+5.7	-	-	+A12000	-	RNAV1	
TF	TT234	-	039 (044.5)	+5.5	20.3	-	+A8000	-	RNAV1	
TF	TT206	-	076 (081.1)	+5.5	10.0	R	@A6000	@230	RNAV1	
TF	TT207	-	156 (161.6)	+5.5	6.0	R	@A6000	@230	RNAV1	
TF	TT208	-	137 (142.5)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	TT209	-	118 (123.4)	+5.5	6.0	L	@A6000	@230	RNAV1	
TF	FIDFI	-	016 (021.5)	+5.5	17.6	L	+A4000	-	RNAV1	

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	TT201	252 (257.8)	R	A6000	-	-	+5.7	RNAV1	
Hold	TT233	139 (144.9)	R	A8000	-	-	+5.7	RNAV1	
Hold	TT234	076 (081.1)	L	A8000	-	-	+5.5	RNAV1	