


**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

AD ELEV 1417'
THR ELEV 26R/26L 1414'/1412'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

**TASHKENT/UZTT
ISLAM KARIMOV
RNAV (GNSS) RWY26R/26L**

LEPVO 2T, TISIB 2T, DILRO 2T.

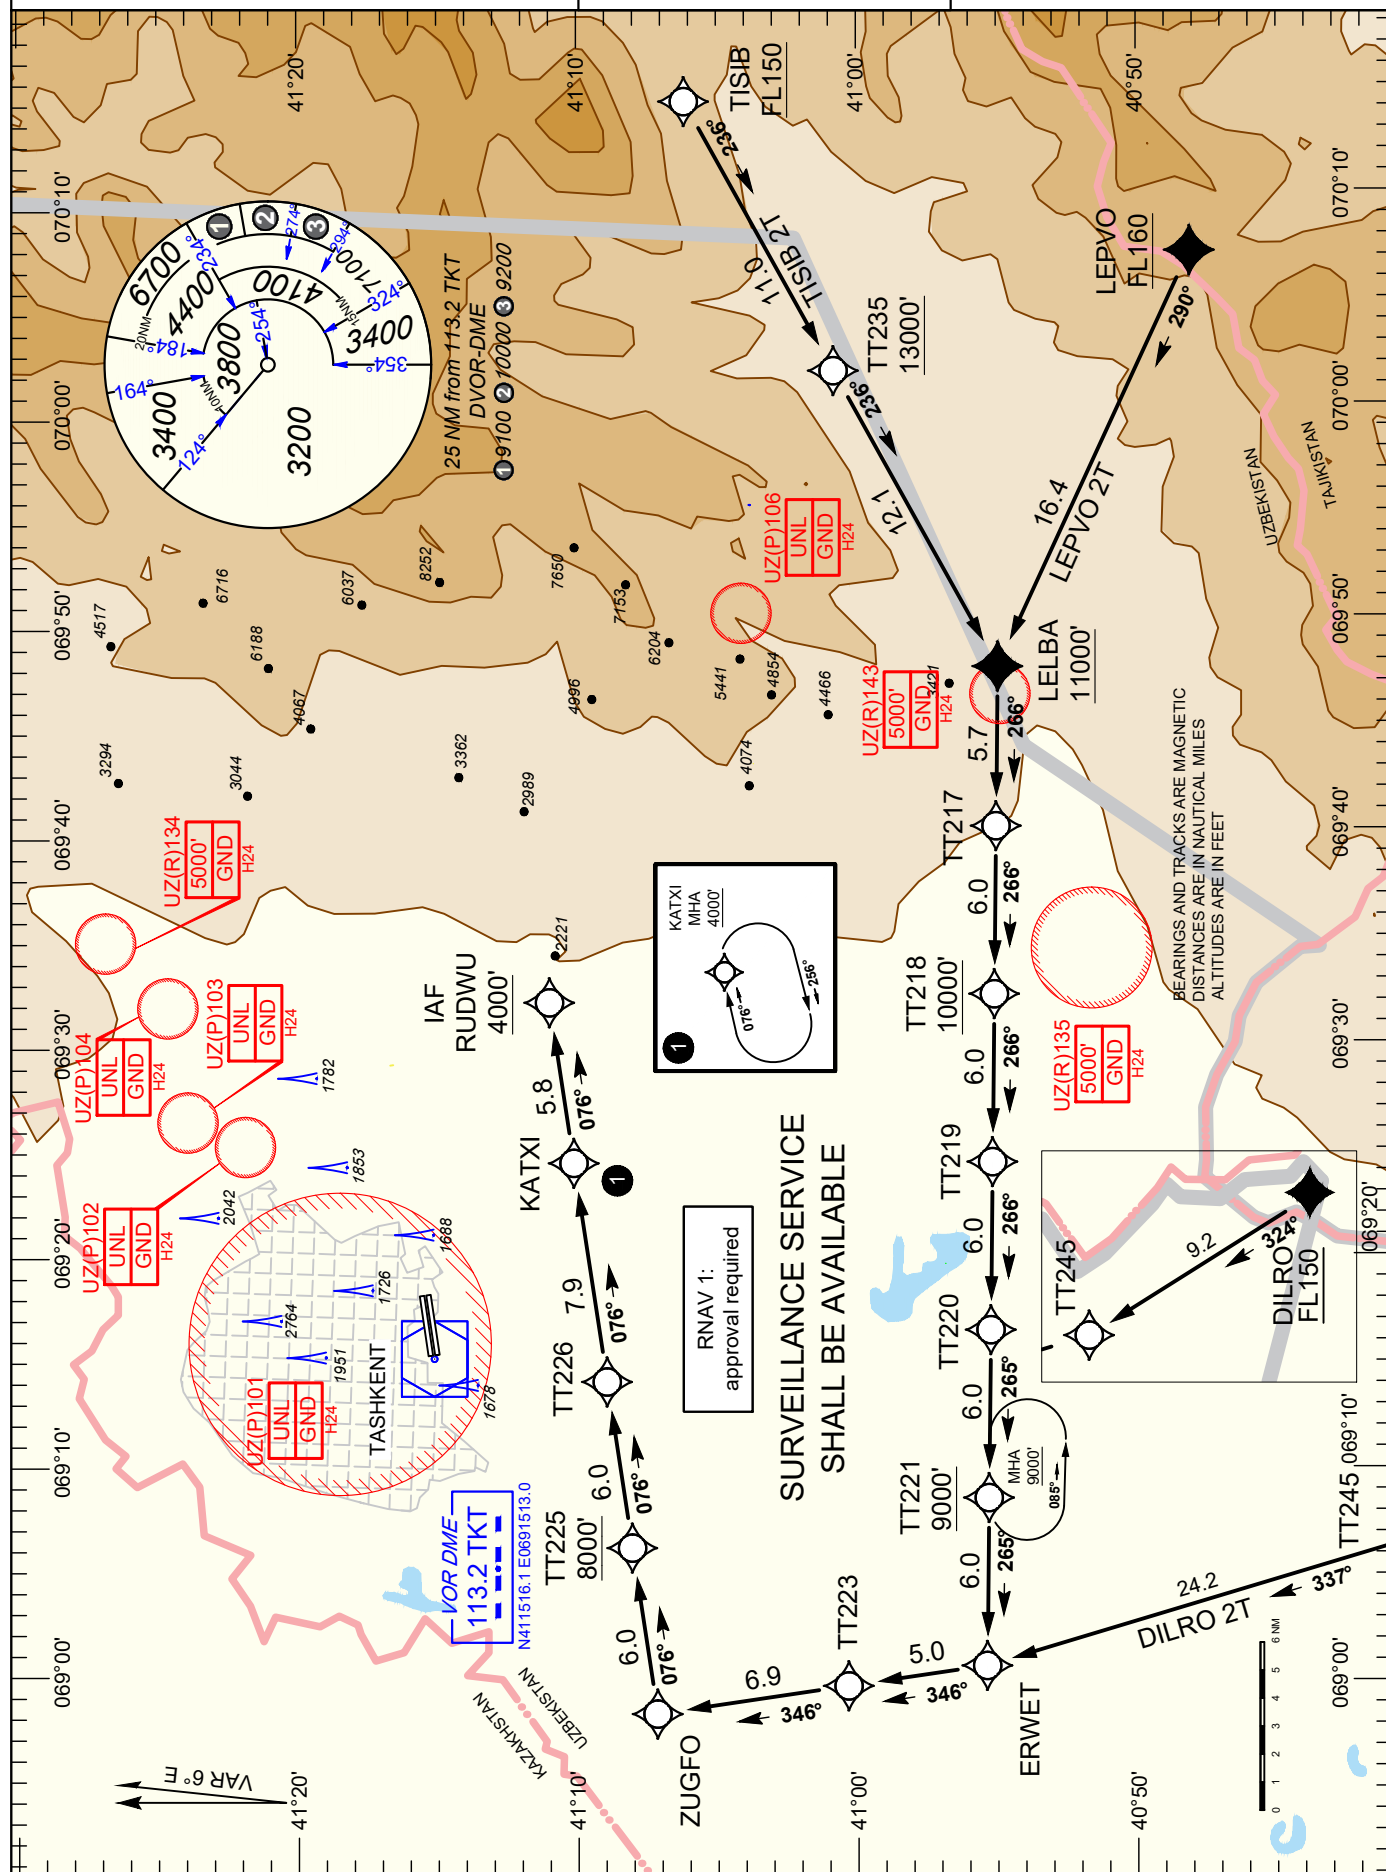

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY 26R/26L

GENERAL:

Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

LEPVO 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	LEPVO	-	-	-	-	-	+FL160	-	RNAV 1	
TF	LELBA	-	290 (295.4)	+5.3	16.4	-	+A11000	-	RNAV 1	
TF	TT217	-	266 (271.1)	+5.3	5.7	L	-	-	RNAV 1	
TF	TT218	-	266 (271.0)	+5.3	6.0	-	+A10000	-	RNAV 1	
TF	TT219	-	266 (270.9)	+5.4	6.0	-	-	-	RNAV 1	
TF	TT220	-	266 (270.8)	+5.4	6.0	-	-	-	RNAV 1	
TF	TT221	-	265 (270.8)	+5.4	6.0	-	+A9000	-	RNAV 1	
TF	ERWET	-	265 (270.7)	+5.4	6.0	-	-	-	RNAV 1	
TF	TT223	-	346 (351.6)	+5.4	5.0	R	-	-	RNAV 1	
TF	ZUGFO	-	346 (351.6)	+5.5	6.9	-	-	-	RNAV 1	
TF	TT225	-	076 (081.3)	+5.5	6.0	R	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	-	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

TISIB 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	TISIB	-	-	-	-	-	+FL150	-	RNAV 1	
TF	TT235	-	236 (241.7)	+5.4	11.0	-	+A13000	-	RNAV 1	
TF	LELBA	-	236 (241.6)	+5.3	12.1	-	+A11000	-	RNAV 1	
TF	TT217	-	266 (271.1)	+5.3	5.7	R	-	-	RNAV 1	
TF	TT218	-	266 (271.0)	+5.3	6.0	-	+A10000	-	RNAV 1	
TF	TT219	-	266 (270.9)	+5.4	6.0	-	-	-	RNAV 1	
TF	TT220	-	266 (270.8)	+5.4	6.0	-	-	-	RNAV 1	
TF	TT221	-	265 (270.8)	+5.4	6.0	-	+A9000	-	RNAV 1	
TF	ERWET	-	265 (270.7)	+5.4	6.0	-	-	-	RNAV 1	
TF	TT223	-	346 (351.6)	+5.4	5.0	R	-	-	RNAV 1	
TF	ZUGFO	-	346 (351.6)	+5.5	6.9	-	-	-	RNAV 1	
TF	TT225	-	076 (081.3)	+5.5	6.0	R	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	-	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	TT221	265 (270.7)	L	A9000	-	-	+5.7	RNAV1	
Hold	KATXI	076 (081.9)	R	A4000	-	-	+5.7	RNAV1	

STANDARD ARRIVAL ROUTES - RNP (GNSS) INSTRUMENTAL - RWY26R/26L

GENERAL: Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

DILRO 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	DILRO	-	-	-	-	-	+FL150	-	RNAV 1	
TF	TT245	-	323 (328.0)	+5.3	9.2	-	-	-	RNAV 1	
TF	ERWET	-	337 (342.6)	+5.4	24.2	R	-	-	RNAV 1	
TF	TT223	-	346 (351.6)	+5.4	5.0	R	-	-	RNAV 1	
TF	ZUGFO	-	346 (351.6)	+5.5	6.9	-	-	-	RNAV 1	
TF	TT225	-	076 (081.3)	+5.5	6.0	R	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	-	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	