


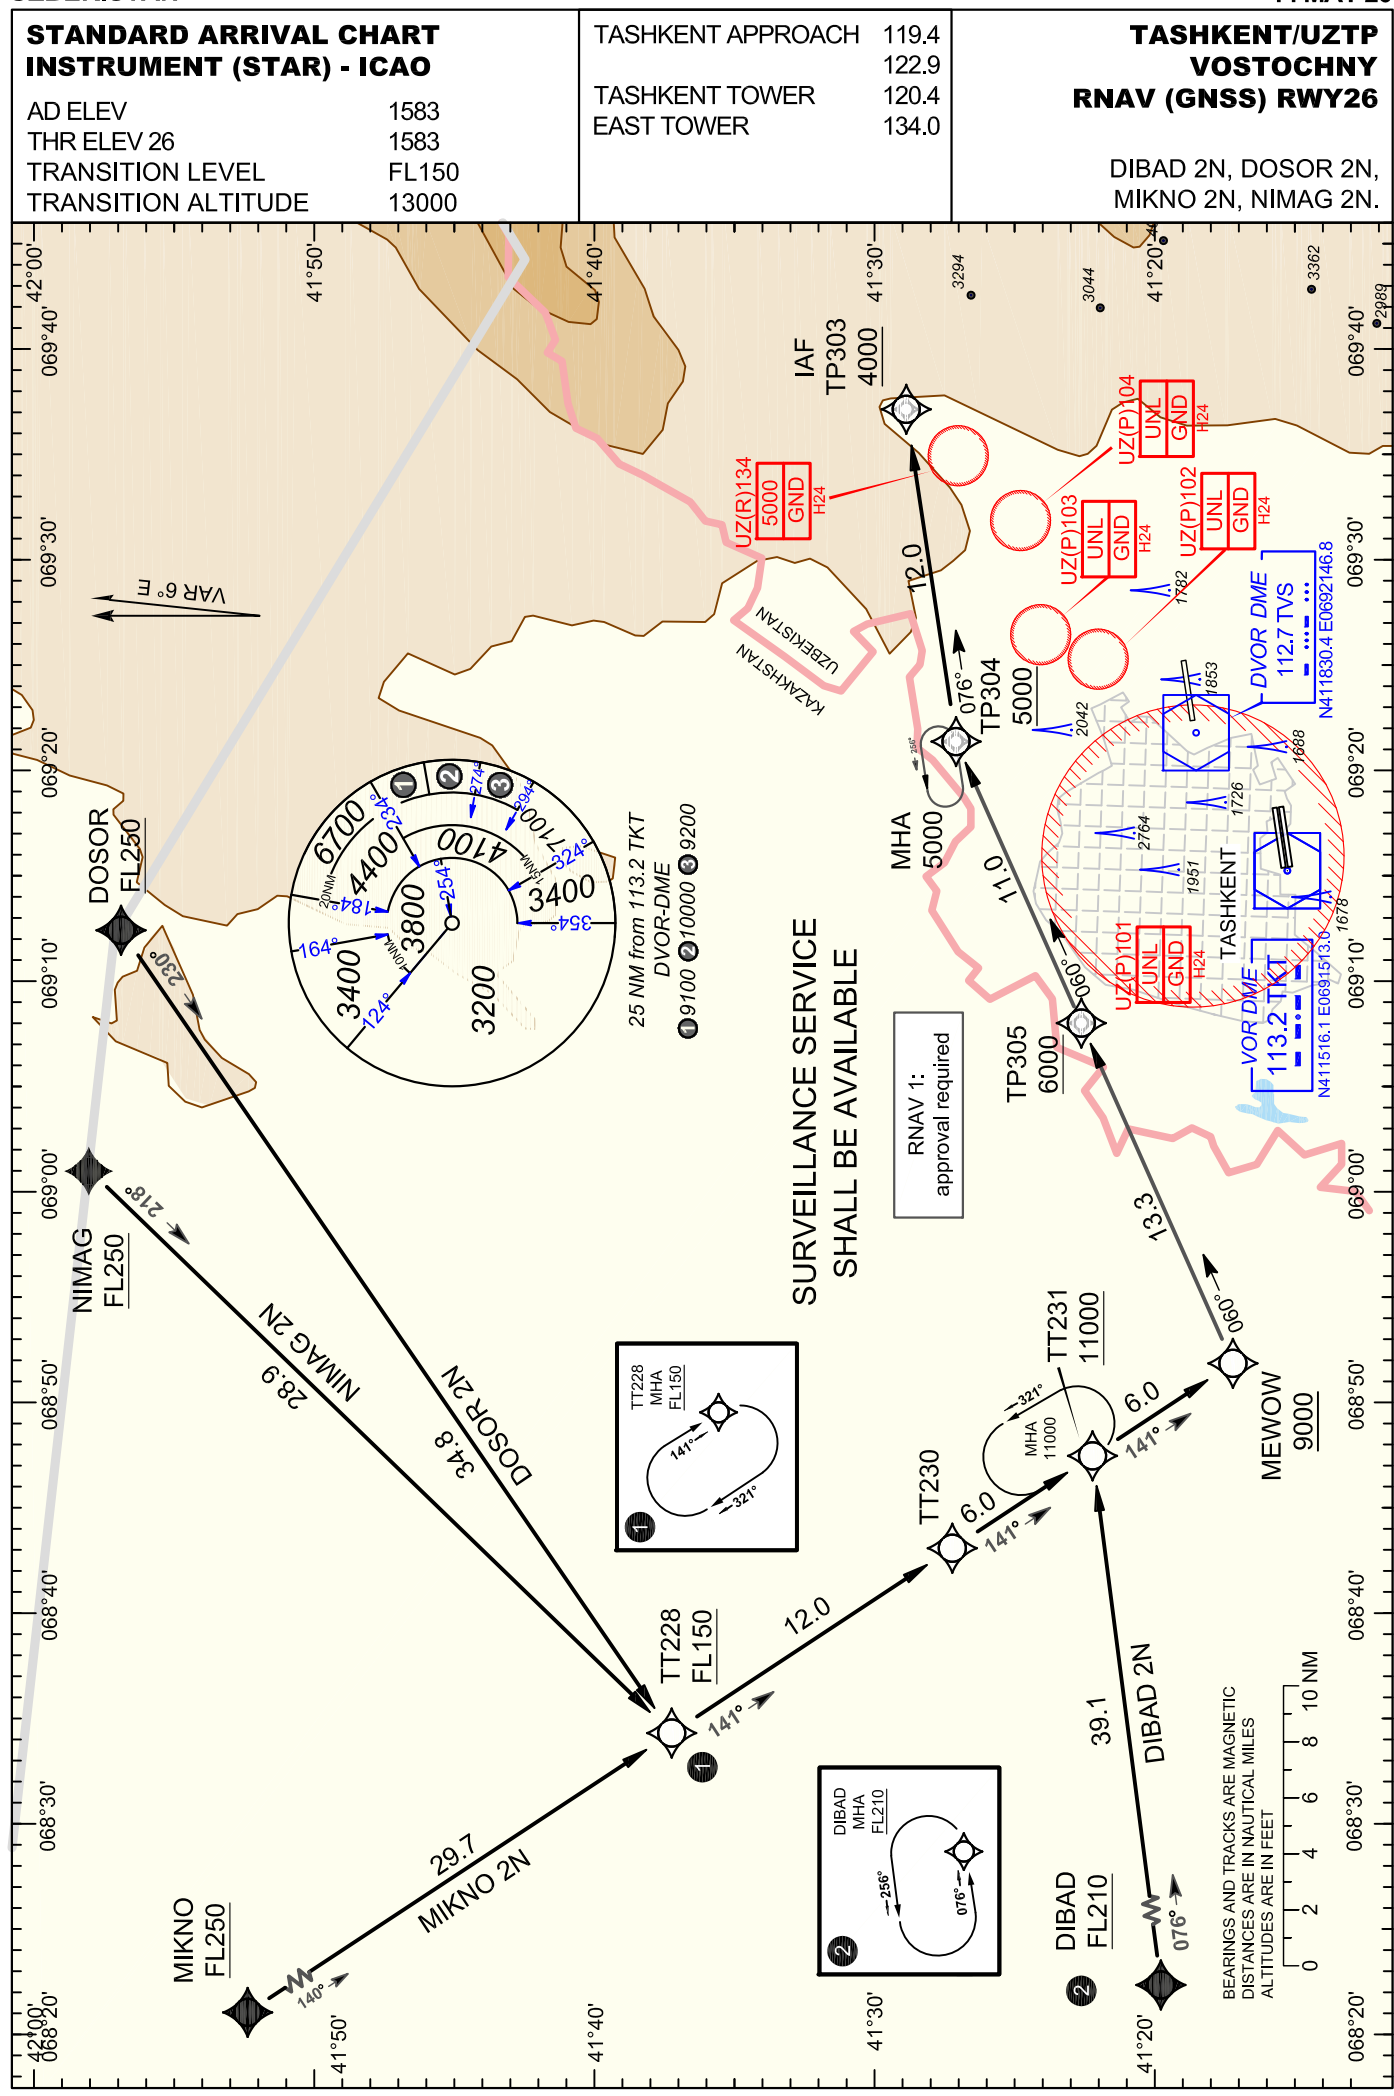

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY26

GENERAL:

Surveillance service shall be available.
Maximum IAS below 10000 - 250 KT or by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

DIBAD 2N

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	DIBAD	-	-	+5.7	-	-	+FL210	-	RNAV 1	
TF	TT231	-	076 (081.9)	+5.7	39.1	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.7	6.0	R	+A9000	-	RNAV 1	

DOSOR 2N

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	DOSOR	-	-	+5.7	-	-	+FL250	-	RNAV 1	
TF	TT228	-	230 (235.7)	+5.7	34.8	-	+FL150	-	RNAV 1	
TF	TT230	-	141 (146.3)	+5.7	12.0	L	-	-	RNAV 1	
TF	TT231	-	141 (146.4)	+5.7	6.0	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.7	6.0	-	+A9000	-	RNAV 1	

NIMAG 2N

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	NIMAG	-	-	+5.7	-	-	+FL250	-	RNAV 1	
TF	TT228	-	218 (223.7)	+5.7	28.9	-	+FL150	-	RNAV 1	
TF	TT230	-	141 (146.3)	+5.7	12.0	L	-	-	RNAV 1	
TF	TT231	-	141 (146.4)	+5.7	6.0	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.7	6.0	-	+A9000	-	RNAV 1	

MIKNO 2N

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	MIKNO	-	-	+5.7	-	-	+FL250	-	RNAV 1	
TF	TT228	-	140 (146.1)	+5.7	29.7	-	+FL150	-	RNAV 1	
TF	TT230	-	141 (146.3)	+5.7	12.0	-	-	-	RNAV 1	
TF	TT231	-	141 (146.4)	+5.7	6.0	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.7	6.0	-	+A9000	-	RNAV 1	

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	MEWOW	-		+5.7	-	-	+A9000	-	RNAV 1	
TF	TP305	-	060 (065.9)	+5.7	13.3	-	+A6000	-	RNAV 1	
TF	TP304	-	060 (066.1)	+5.7	11.0	-	+A5000	-	RNAV 1	
TF	TP303	-	076 (081.7)	+5.7	12.0	R	+A4000	-	RNAV 1	

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	TP304	076 (081.7)	L	A5000	-	-	+5.7	RNAV1	
Hold	TT231	141 (147.7)	L	A11000	-	-	+5.7	RNAV1	
Hold	DIBAD	076 (081.7)	L	FL210	-	-	+5.7	RNAV1	
Hold	TT228	141 (147.7)	R	FL150	-	-	+5.7	RNAV1	