


**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

AD ELEV 1417'
THR ELEV 08L/08R 1369'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

**TASHKENT/UZTT
ISLAM KARIMOV
RNAV(GNSS) RWY08L/08R**

DILRO 2W, LEPVO 2W, TISIB 2W.

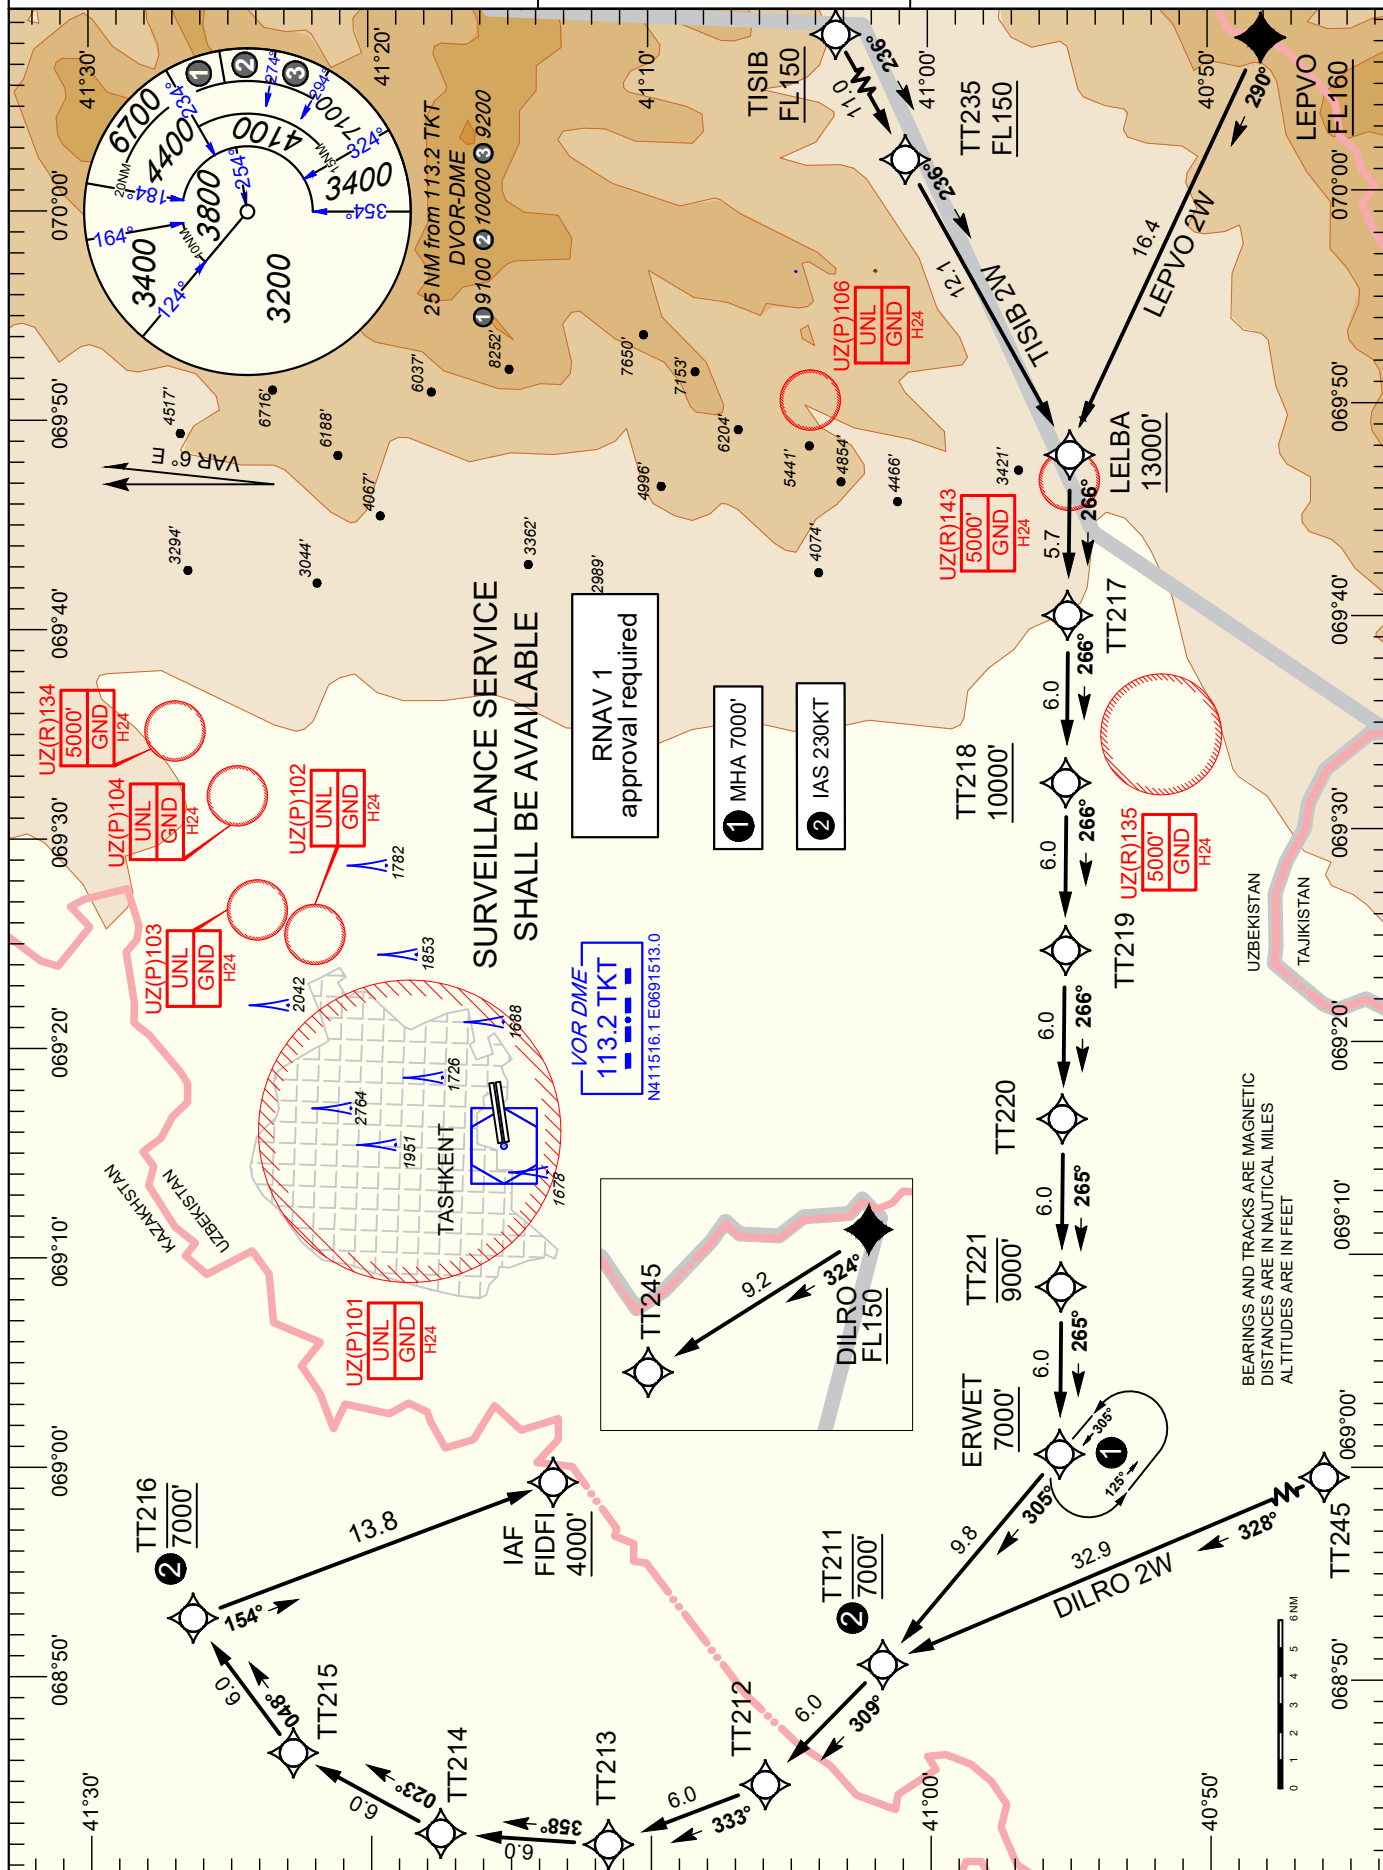

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY08L/08R

GENERAL: Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

LEPVO 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	LEPVO	-	-	+5.3	-	-	+FL160	-	RNAV1	
TF	LELBA	-	290 (295.4)	+5.4	16.4	-	+A13000	-	RNAV1	
TF	TT217	-	266 (271.1)	+5.4	5.7	L	-	-	RNAV1	
TF	TT218	-	266 (271.0)	+5.4	6.0	-	+A10000	-	RNAV1	
TF	TT219	-	266 (270.9)	+5.4	6.0	-	-	-	RNAV1	
TF	TT220	-	266 (270.8)	+5.4	6.0	-	-	-	RNAV1	
TF	TT221	-	265 (270.8)	+5.4	6.0	-	-A9000	-	RNAV1	
TF	ERWET	-	265 (270.7)	+5.4	6.0	-	+A7000	-	RNAV1	
TF	TT211	-	305 (310.0)	+5.4	9.8	R	@A7000	@230	RNAV1	
TF	TT212	-	309 (314.3)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT213	-	333 (339.0)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT214	-	358 (003.7)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT215	-	023 (028.4)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT216	-	048 (053.2)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	FIDFI	-	154 (159.1)	+5.5	13.8	R	+A4000	-	RNAV1	

TISIB 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TISIB	-	-	+5.3	-	-	+FL150	-	RNAV1	
TF	TT235	-	236 (241.7)	+5.3	11.0	-	+FL150	-	RNAV1	
TF	LELBA	-	236 (241.6)	+5.3	12.1	-	+A13000	-	RNAV1	
TF	TT217	-	266 (271.1)	+5.4	5.7	R	-	-	RNAV1	
TF	TT218	-	266 (271.0)	+5.4	6.0	-	+A10000	-	RNAV1	
TF	TT219	-	266 (270.9)	+5.4	6.0	-	-	-	RNAV1	
TF	TT220	-	266 (270.8)	+5.4	6.0	-	-	-	RNAV1	
TF	TT221	-	265 (270.8)	+5.4	6.0	-	-A9000	-	RNAV1	
TF	ERWET	-	265 (270.7)	+5.4	6.0	-	+A7000	-	RNAV1	
TF	TT211	-	305 (310.0)	+5.4	9.8	R	@A7000	@230	RNAV1	
TF	TT212	-	309 (314.3)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT213	-	333 (339.0)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT214	-	358 (003.7)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT215	-	023 (028.4)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT216	-	048 (053.2)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	FIDFI	-	154 (159.1)	+5.5	13.8	R	+A4000	-	RNAV1	

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY08L/08R (CONT)

GENERAL: Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

DILRO 2W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DILRO	-	-	+5.3	-	-	+FL150	-	RNAV1	
TF	TT245	-	323 (328.0)	+5.4	9.2	-	-	-	RNAV1	
TF	TT211	-	328 (333.4)	+5.4	32.9	L	@A7000	@230	RNAV1	
TF	TT212	-	309 (314.3)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT213	-	333 (339.0)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT214	-	358 (003.7)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT215	-	023 (028.4)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	TT216	-	048 (053.2)	+5.5	6.0	R	@A7000	@230	RNAV1	
TF	FIDFI	-	154 (159.1)	+5.5	13.8	R	+A4000	-	RNAV1	

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	ERWET	305 (310.4)	L	A7000	-	-	+5.4	RNAV1	1min 00sec at or below 13000' 1min 30sec at or above FL150