


|                                                                                                                                                             |                       |       |                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>STANDARD ARRIVAL CHART</b><br><b>INSTRUMENT (STAR) - ICAO</b><br>AD ELEV 1142'<br>THR ELEV 1140'<br>TRANSITION LEVEL FL150<br>TRANSITION ALTITUDE 13000' | BUKHARA APPROACH      | 124.6 | <b>NAVOI/UZSA</b><br><b>RNAV (GNSS) RWY25</b><br><br><b>AGDOS 3V, BIBED 3V,</b><br><b>BUPOR 3V, EVMUR 3V,</b><br><b>PETIT 3V, TOLIB 3V.</b> |
|                                                                                                                                                             | NAVOI TOWER           | 132.0 |                                                                                                                                             |
|                                                                                                                                                             | VOLMET (english only) | 113.8 |                                                                                                                                             |
|                                                                                                                                                             |                       |       |                                                                                                                                             |
|                                                                                                                                                             |                       |       |                                                                                                                                             |

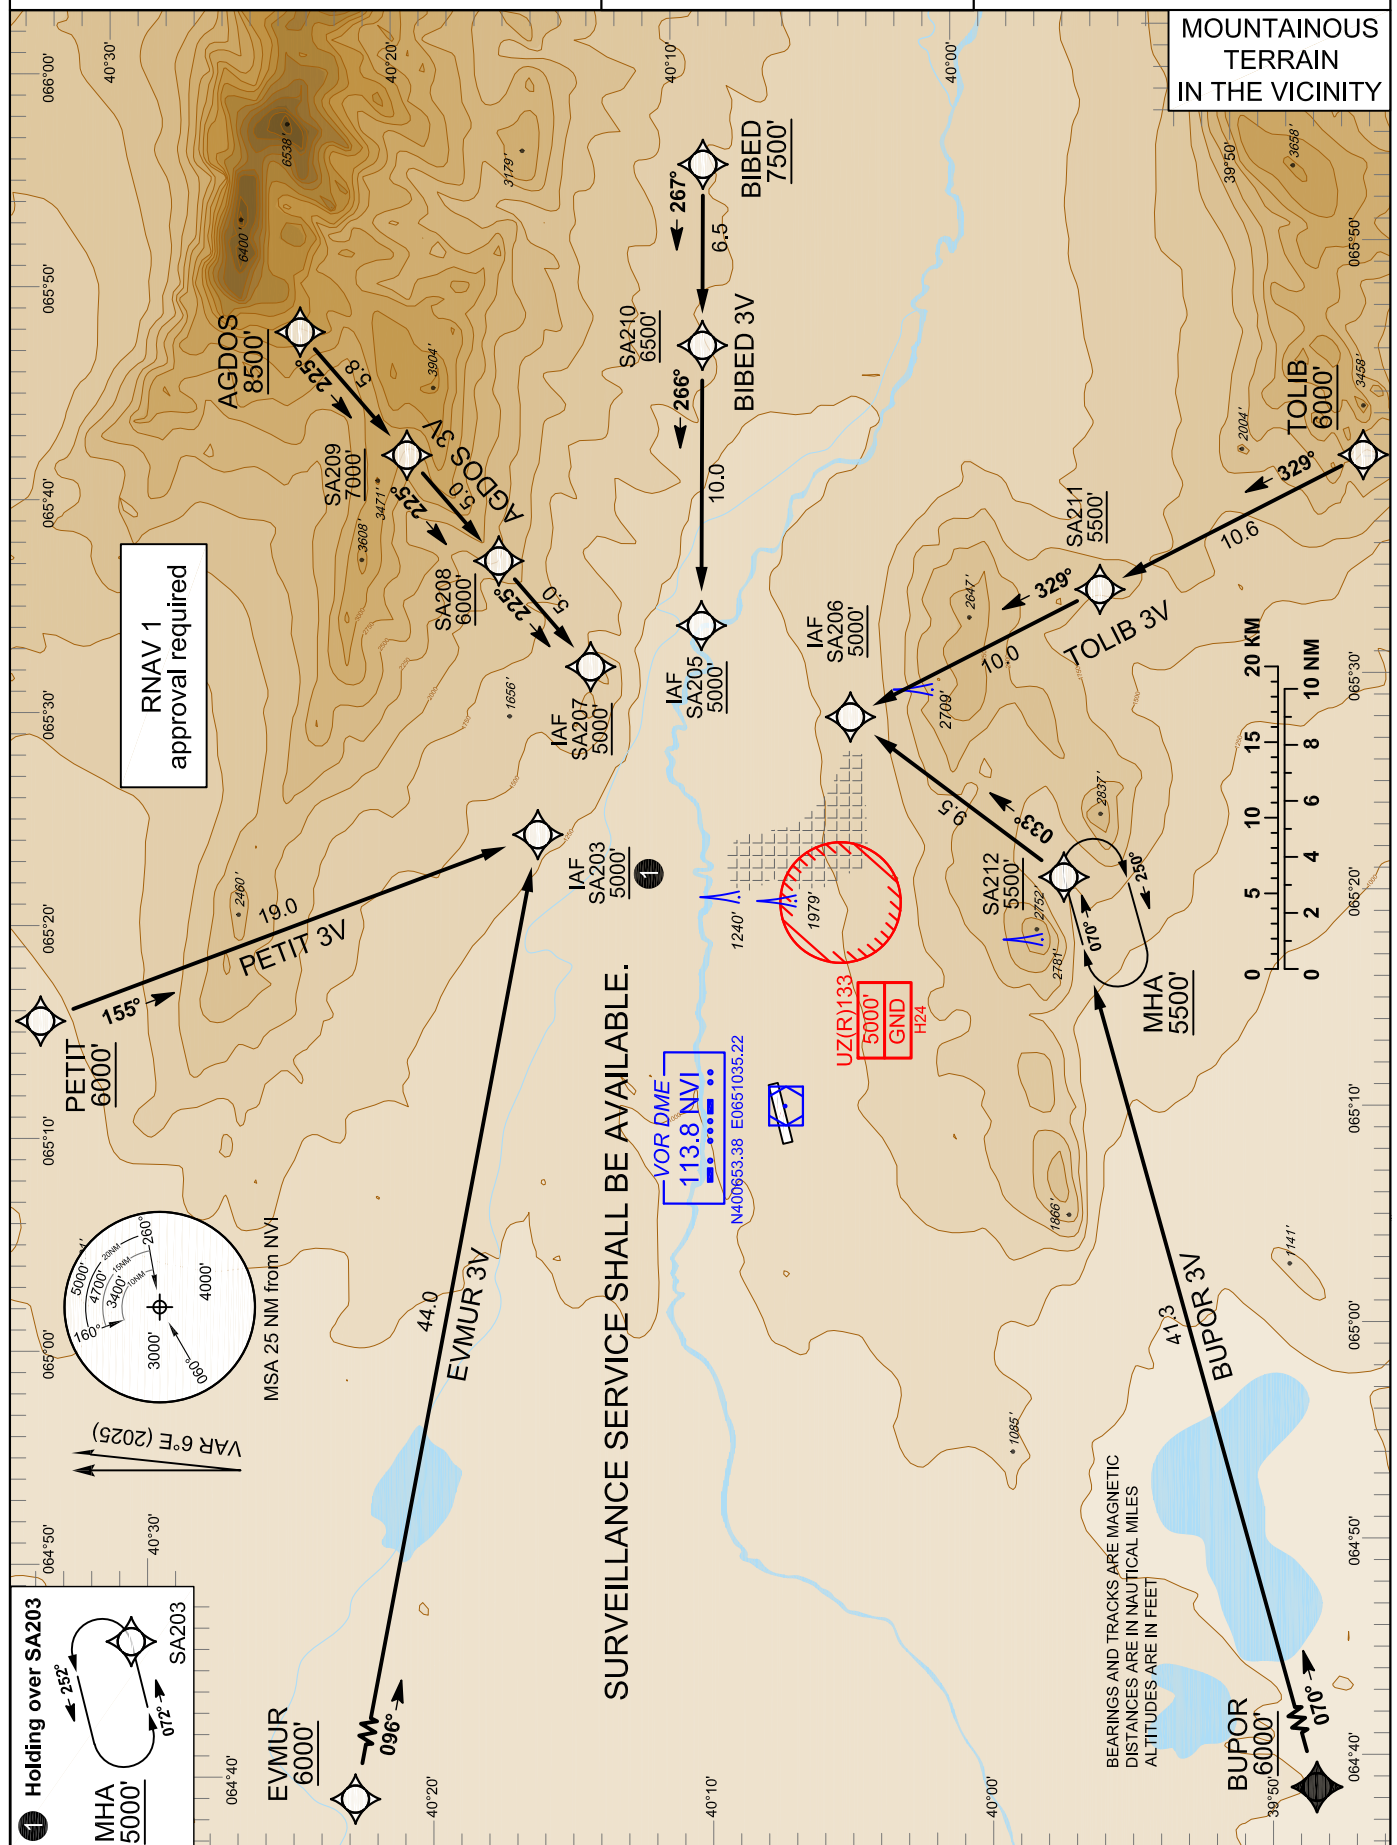

## STANDARD ARRIVAL ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY25

### GENERAL:

Surveillance service shall be available.

Maximum speed below 10000': IAS 250 KT unless otherwise stated under Speed Limit, or instructed by ATC.

### NOTE:

Flocks of birds in the vicinity of aerodrome.

### AGDOS 3V

| Path Descriptor | WPT Identifier | Fly- over | Course/Track °M (°T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | AGDOS          | -         | -                    | +5.6               | -             | -              | +A8500        | -                | RNAV 1                   |         |
| TF              | SA209          | -         | 225 (230.8)          | +5.6               | 5.8           | -              | +A7000        | -                | RNAV 1                   |         |
| TF              | SA208          | -         | 225 (230.8)          | +5.6               | 5.0           | -              | +A6000        | -                | RNAV 1                   |         |
| TF              | SA207          | -         | 225 (230.7)          | +5.6               | 5.0           | -              | +A5000        | -                | RNAV 1                   |         |

### BIBED 3V

| Path Descriptor | WPT Identifier | Fly- over | Course/Track °M (°T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | BIBED          | -         | -                    | +5.6               | -             | -              | +A7500        | -                | RNAV 1                   |         |
| TF              | SA210          | -         | 267 (272.1)          | +5.6               | 6.5           | -              | +A6500        | -                | RNAV 1                   |         |
| TF              | SA205          | -         | 266 (272.0)          | +5.6               | 10.0          | -              | +A5000        | -                | RNAV 1                   |         |

### BUPOR 3V

| Path Descriptor | WPT Identifier | Fly- over | Course/Track °M (°T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | BUPOR          | -         | -                    | +5.6               | -             | -              | +A6000        | -                | RNAV 1                   |         |
| TF              | SA212          | -         | 070 (075.4)          | +5.6               | 41.3          | -              | +A5500        | -                | RNAV 1                   |         |
| TF              | SA206          | -         | 033 (038.4)          | +5.6               | 9.5           | L              | +A5000        | -                | RNAV 1                   |         |

### EVMUR 3V

| Path Descriptor | WPT Identifier | Fly- over | Course/Track °M (°T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | EVMUR          | -         | -                    | +5.6               | -             | -              | +A6000        | -                | RNAV 1                   |         |
| TF              | SA203          | -         | 096 (101.6)          | +5.6               | 44.0          | -              | +A5000        | -                | RNAV 1                   |         |

### PETIT 3V

| Path Descriptor | WPT Identifier | Fly- over | Course/Track °M (°T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | PETIT          | -         | -                    | +5.6               | -             | -              | +A6000        | -                | RNAV 1                   |         |
| TF              | SA203          | -         | 155 (161.0)          | +5.6               | 19.0          | -              | +A5000        | -                | RNAV 1                   |         |

Continued on the next page

## TOLIB 3V

| Path Descriptor | WPT Identifier | Fly- over | Course/Track °M (°T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | TOLIB          | -         | -                    | +5.6               | -             | -              | +A6000        | -                | RNAV 1                   |         |
| TF              | SA211          | -         | 329 (334.6)          | +5.6               | 10.6          | -              | +A5500        | -                | RNAV 1                   |         |
| TF              | SA206          | -         | 329 (334.5)          | +5.6               | 10.0          | -              | +A5000        | -                | RNAV 1                   |         |

| Path Descriptor | WPT Identifier | Inbound course °M (°T) | Turn direction | Minimum altitude (FT) | Maximum altitude (FT) | Speed limit (KT) | Magnetic variation | Navigation specification | Remarks    |
|-----------------|----------------|------------------------|----------------|-----------------------|-----------------------|------------------|--------------------|--------------------------|------------|
| Hold            | SA203          | 072 (077.2)            | L              | A5000                 | A13000                | -230             | +5.6               | RNAV 1                   | 1min 00sec |
| Hold            | SA212          | 070 (076.0)            | R              | A5500                 | A13000                | -230             | +5.6               | RNAV 1                   | 1min 00sec |