


**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**

AD ELEV 1417'
THR ELEV 26R/26L 1414'/1412'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

**TASHKENT/UZTT
ISLAM KARIMOV
RNAV (GNSS) RWY26R/26L**

DIBAD 2T, DOSOR 2T,
MIKNO 2T, NIMAG 2T,
OGRIP 2T, KUFIM 2T.

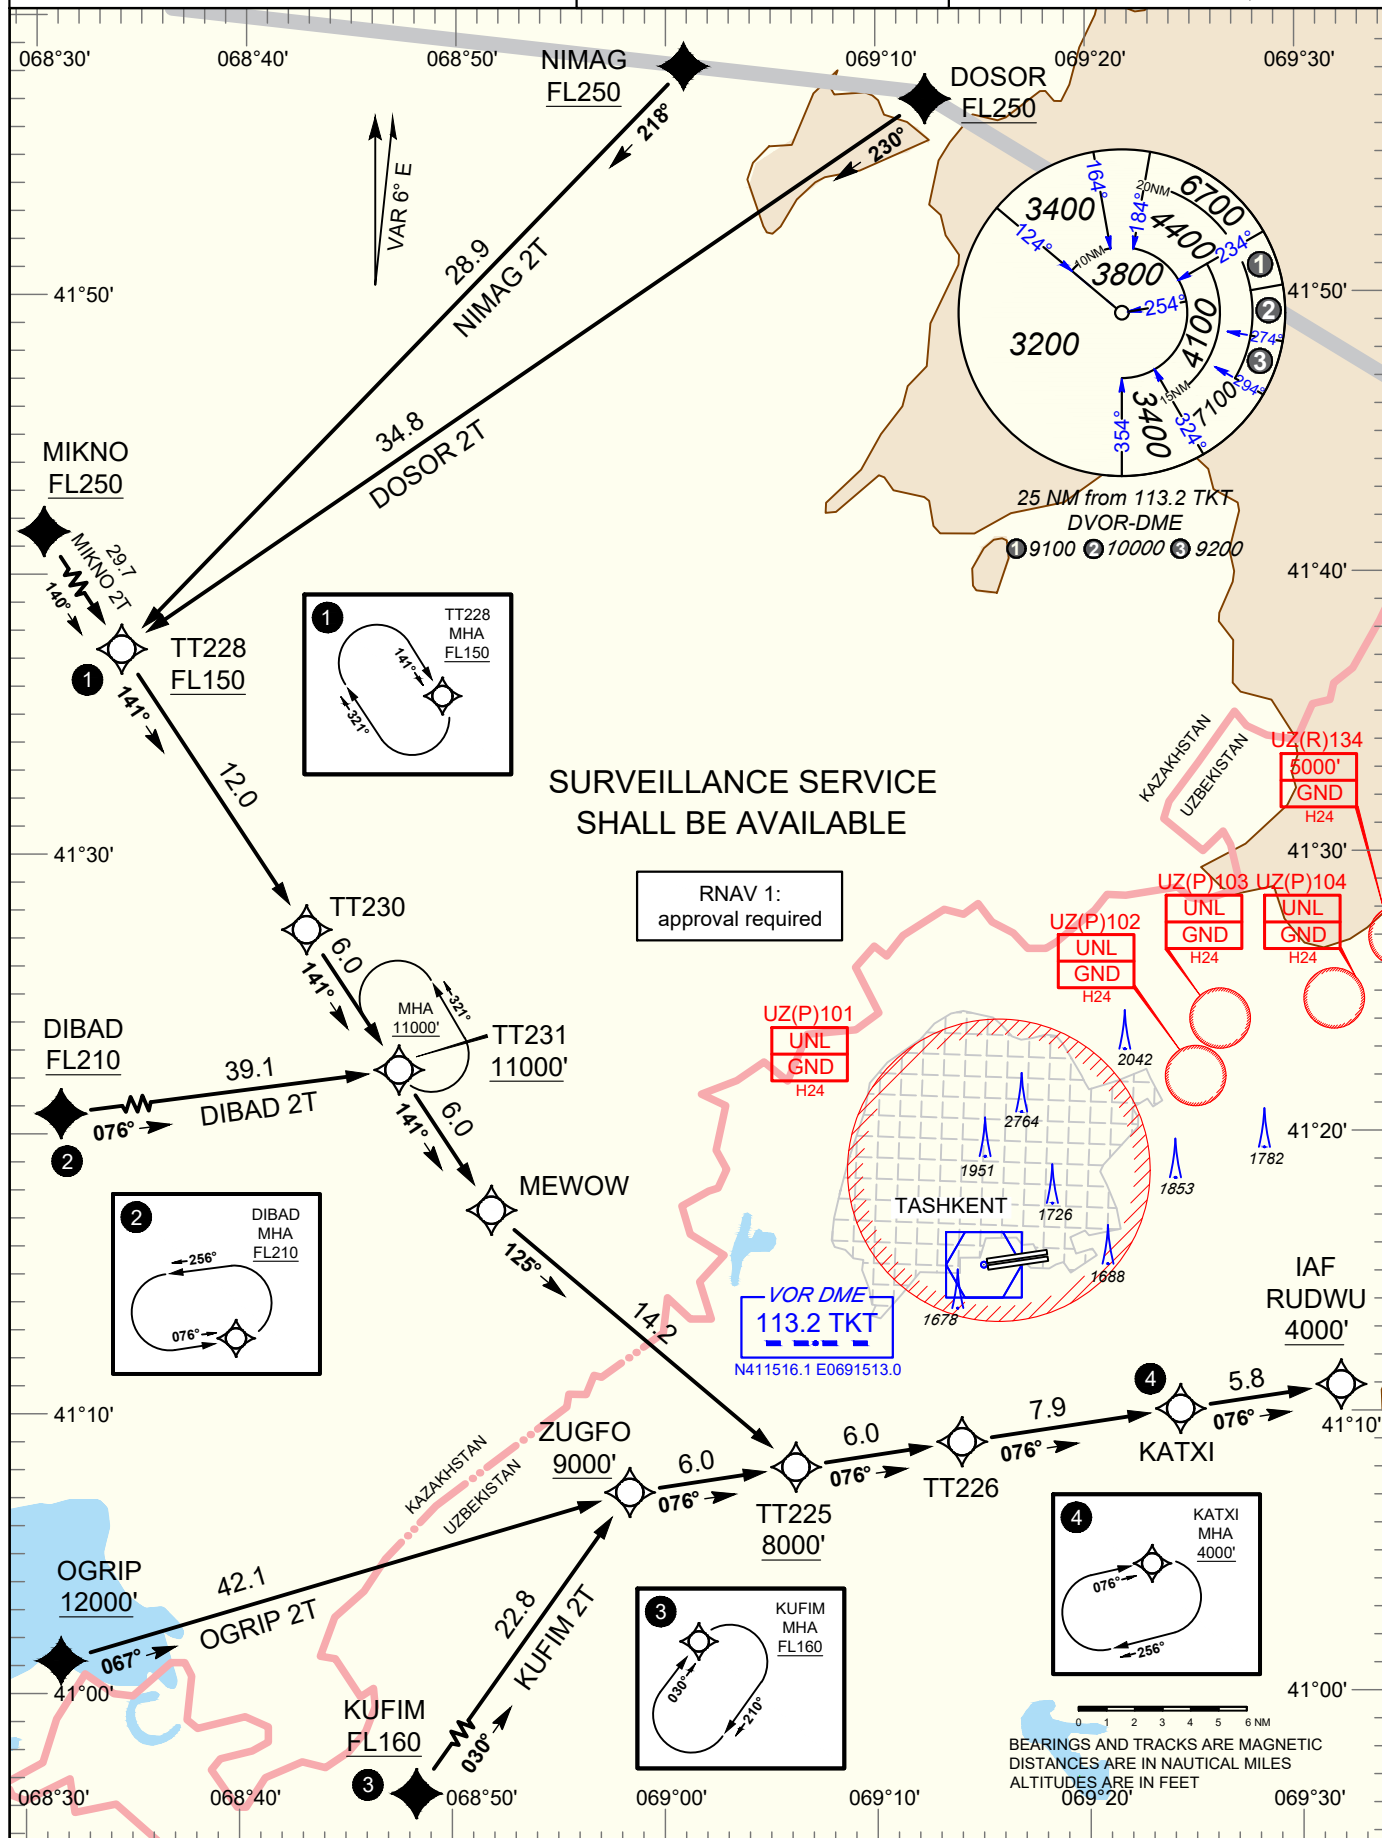

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY 26R/26L

GENERAL:

Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

DIBAD 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	DIBAD	-	-	-	-	-	+FL210	-	RNAV 1	
TF	TT231	-	076 (081.9)	+5.7	39.1	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.6	6.0	R	-	-	RNAV 1	
TF	TT225	-	125 (130.1)	+5.6	14.2	L	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	L	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

DOSOR 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	DOSOR	-	-	-	-	-	+FL250	-	RNAV 1	
TF	TT228	-	230 (235.7)	+5.8	34.8	-	+FL150	-	RNAV 1	
TF	TT230	-	141 (146.3)	+5.7	12.0	L	-	-	RNAV 1	
TF	TT231	-	141 (146.4)	+5.7	6.0	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.6	6.0	-	-	-	RNAV 1	
TF	TT225	-	125 (130.1)	+5.6	14.2	L	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	L	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

KUFIM 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	KUFIM	-	-	-	-	-	+FL160	-	RNAV 1	
TF	ZUGFO	-	030 (035.1)	+5.4	22.8	-	+A9000	-	RNAV 1	
TF	TT225	-	076 (081.3)	+5.6	6.0	R	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	-	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

MIKNO 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	MIKNO	-	-	-	-	-	+FL250	-	RNAV 1	
TF	TT228	-	140 (146.1)	+6.0	29.7	-	+FL150	-	RNAV 1	
TF	TT230	-	141 (146.3)	+5.7	12.0	-	-	-	RNAV 1	
TF	TT231	-	141 (146.4)	+5.7	6.0	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.6	6.0	-	-	-	RNAV 1	
TF	TT225	-	125 (130.1)	+5.6	14.2	L	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	L	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

Continued on the next page

STANDARD INSTRUMENT ARRIVAL ROUTES - RNAV (GNSS) RWY 26R/26L

GENERAL:

Surveillance service shall be available.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

NIMAG 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	NIMAG	-	-	-	-	-	+FL250	-	RNAV 1	
TF	TT228	-	218 (224.3)	+6.0	28.9	-	+FL150	-	RNAV 1	
TF	TT230	-	141 (146.3)	+5.7	12.0	L	-	-	RNAV 1	
TF	TT231	-	141 (146.4)	+5.7	6.0	-	+A11000	-	RNAV 1	
TF	MEWOW	-	141 (146.5)	+5.6	6.0	-	-	-	RNAV 1	
TF	TT225	-	125 (130.1)	+5.6	14.2	L	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	L	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

OGRIP 2T

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	Navigation Specification	Remarks
IF	OGRIP	-	-	-	-	-	+A12000	-	RNAV 1	
TF	ZUGFO	-	067 (072.7)	+5.4	42.1	-	+A9000	-	RNAV 1	
TF	TT225	-	076 (081.3)	+5.6	6.0	R	+A8000	-	RNAV 1	
TF	TT226	-	076 (081.4)	+5.5	6.0	-	-	-	RNAV 1	
TF	KATXI	-	076 (081.5)	+5.5	7.9	-	-	-	RNAV 1	
TF	RUDWU	-	076 (081.6)	+5.5	5.8	-	+A4000	-	RNAV 1	

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	KATXI	076 (081.9)	R	A4000	-	-	+5.7	RNAV1	
Hold	TT228	141 (146.3)	R	FL150	-	-	+5.7	RNAV1	
Hold	TT231	141 (146.5)	L	A11000	-	-	+5.7	RNAV1	
Hold	DIBAD	076 (081.9)	L	FL210	-	-	+5.5	RNAV1	
Hold	KUFIM	030 (035.1)	R	FL160	-	-	+5.5	RNAV1	