


BUKHARA APPROACH	124.6
NAVOI TOWER	132.0
VOLMET (english only)	113.8

AD ELEV	1142'
THR ELEV	1118'
TRANSITION LEVEL	FL150
TRANSITION ALTITUDE	13000'


NAVOI/UZSA

**ILS DME Z or LOC DME Z
RWY07 CAT II**

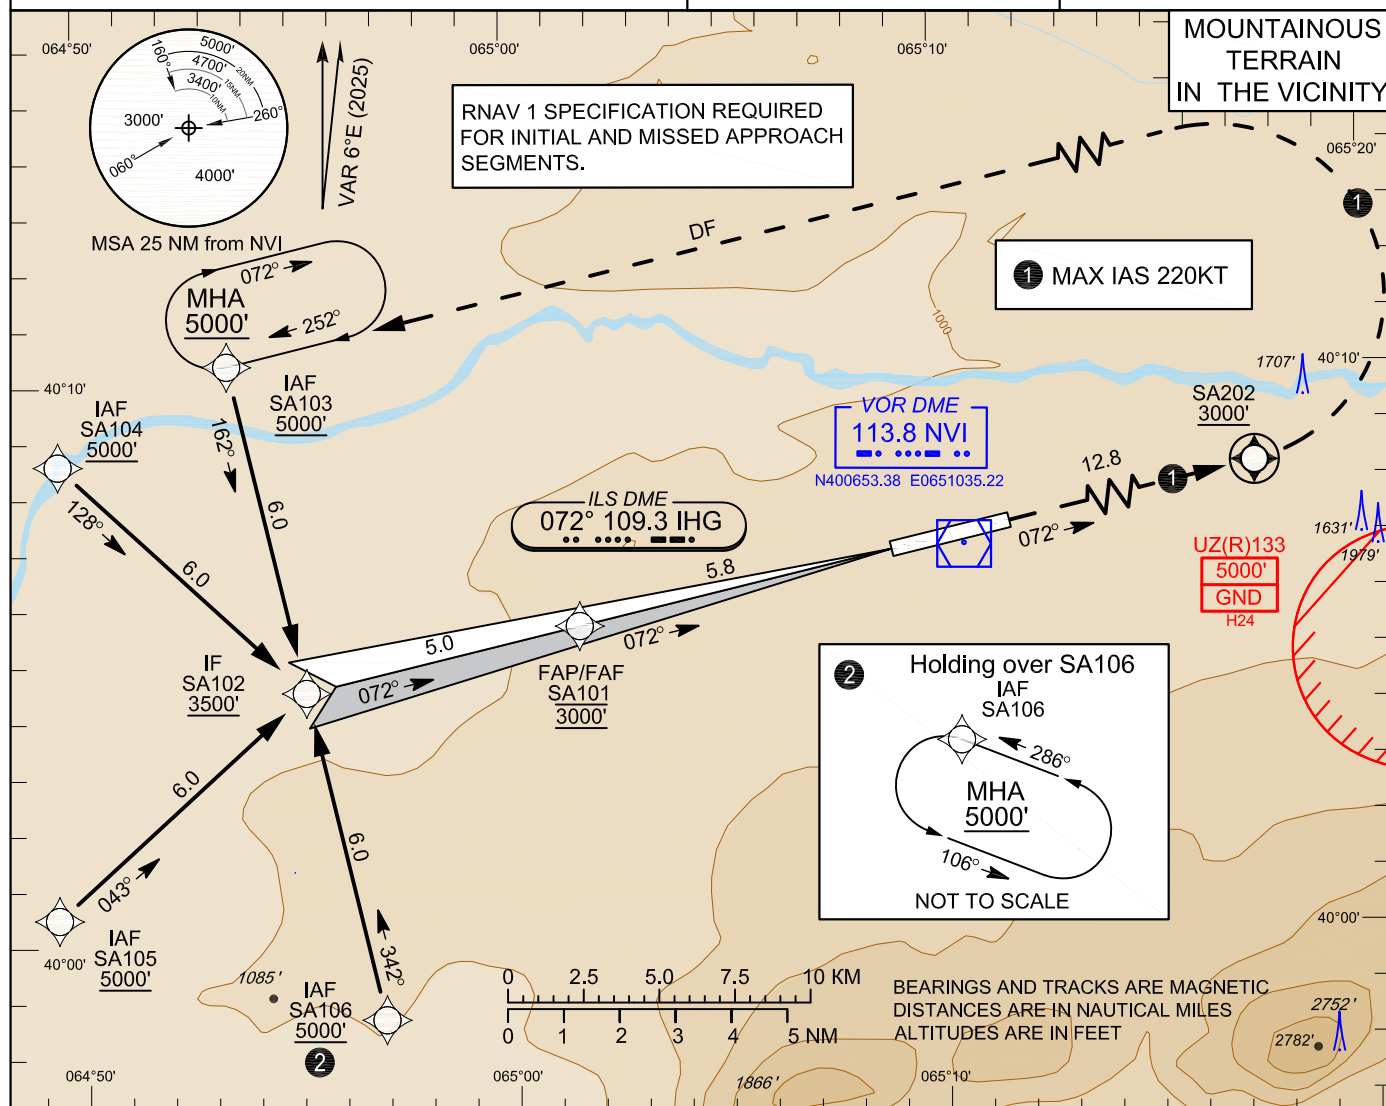

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAF - THR 5.8NM DES Gradient 5.2%	min:s	4:56	3:50	3:27	2:53	2:28	2:09

DIST TO NVI	NM	2.2	3.2	4.2	5.2	6.2
DIST TO THR/IHG	NM	1.0	2.0	3.0	4.0	5.0
ALT	ft	1487	1806	2124	2442	2761
HEIGHT	m	113	210	307	404	501

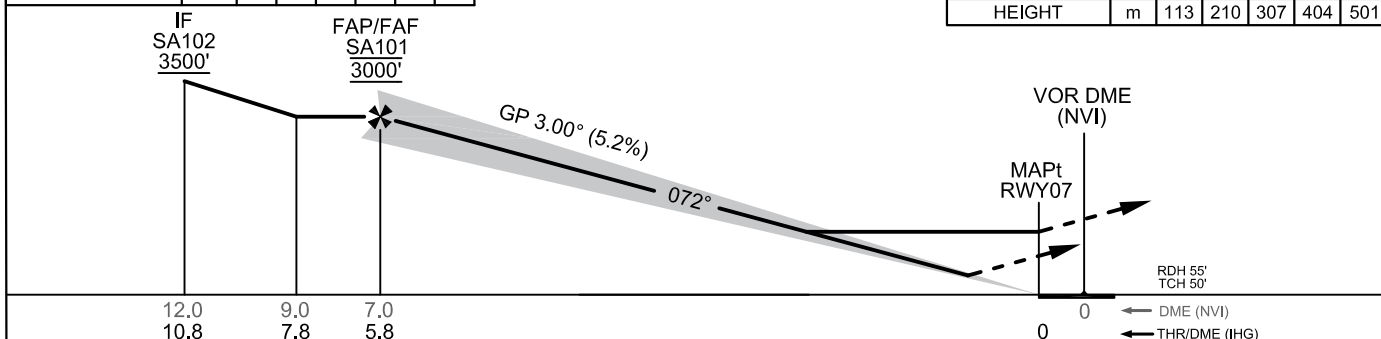

MISSED APPROACH: Climb on TR072°, Passing SA202 at 3000' or above TURN LEFT (MAX IAS 220KT) to SA103 climbing 5000'.
HOLD over SA103 or follow ATC instruction.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	CAT II	1218'(100')			
	CAT I	1318'(200')			
	LOC	1500'(382')			
CIRCLING		1570'(452')	1640'(522')	1740'(622')	1840'(722')

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZSA AD2.24-6.X. CIRCLING NORTH OF AD ONLY.

INSTRUMENT APPROACH ROUTES - ILS TO RNAV 1 (GNSS) - RWY07

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/RDH/TCH °/FT/FT	Navigation Specification
IF	SA103	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	162 (167.3)	+5.6	6.0	-	+A3500	-	-	RNAV 1
CF	SA101	-	072 (077.5)	+5.6	5.0	L	@A3000	-	-	-
CF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/55/50	-
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/RDH/TCH °/FT/FT	Navigation Specification
IF	SA104	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	128 (133.3)	+5.6	6.0	-	+A3500	-	-	RNAV 1
CF	SA101	-	072 (077.5)	+5.6	5.0	L	@A3000	-	-	-
CF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/55/50	-
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/RDH/TCH °/FT/FT	Navigation Specification
IF	SA105	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	043(048.5)	+5.6	6.0	-	+A3500	-	-	RNAV 1
CF	SA101	-	072 (077.5)	+5.6	5.0	R	@A3000	-	-	-
CF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/55/50	-
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/RDH/TCH °/FT/FT	Navigation Specification
IF	SA106	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	342(347.4)	+5.6	6.0	-	+A3500	-	-	RNAV 1
CF	SA101	-	072 (077.5)	+5.6	5.0	R	@A3000	-	-	-
CF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/55/50	-
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	SA103	252 (257.2)	R	A5000	A13000	-230	+5.6	RNAV 1	1min 00sec
Hold	SA106	286 (291.6)	L	A5000	A13000	-230	+5.6	RNAV 1	1min 00sec