
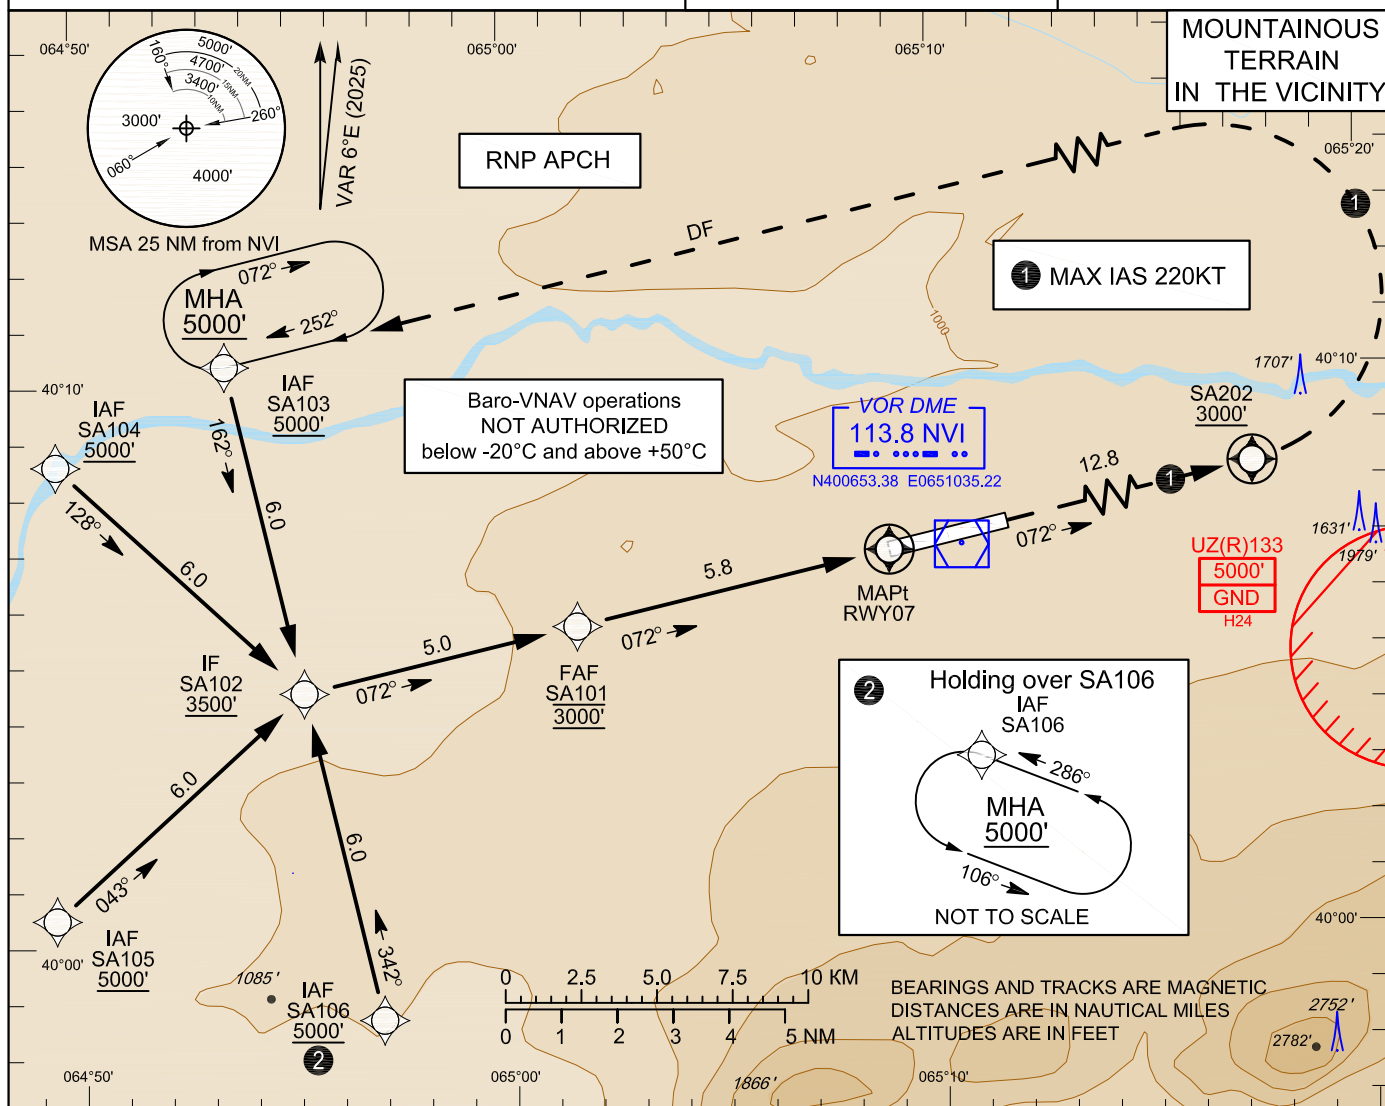


**INSTRUMENT APPROACH
CHART - ICAO**AD ELEV 1142'
THR ELEV 1118'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'BUKHARA APPROACH 124.6
NAVOI TOWER 132.0
VOLMET (english only) 113.8**NAVOI/UZSA****RNP RWY07**

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAF - THR 5.8NM DES Gradient 5.2%	min:s	4:56	3:50	3:27	2:53	2:28	2:09

DIST TO NVI	NM	2.2	3.2	4.2	5.2	6.2
DIST TO THR	NM	1.0	2.0	3.0	4.0	5.0
ALT	ft	1487	1806	2124	2442	2761
HEIGHT	m	113	210	307	404	501

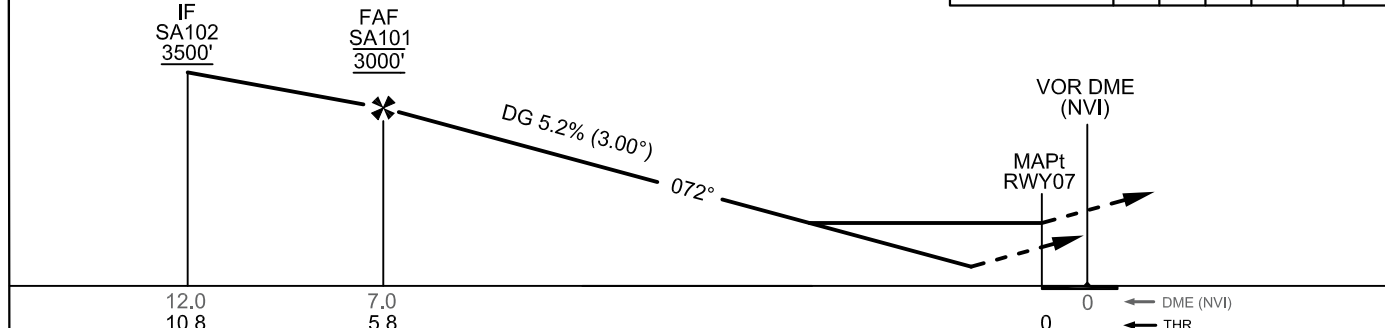

MISSED APPROACH: Climb on TR072°. Passing SA202 at 3000' or above TURN LEFT (MAX IAS 220KT) to SA103 climbing 5000'. HOLD over SA103 or follow ATC instruction.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	LNAV/VNAV	1368'(250')			1373'(255')
	LNAV	1430'(312')			
CIRCLING		1570'(452')	1640'(522')	1740'(622')	1840'(722')

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZSA AD2.24-6.X. CIRCLING NORTH OF AD ONLY.

INSTRUMENT APPROACH ROUTES - RNP APCH (GNSS) - RWY07

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SA103	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	162 (167.3)	+5.6	6.0	-	+A3500	-	-	RNAV 1
TF	SA101	-	072 (077.5)	+5.6	5.0	L	@A3000	-	-	RNAV 1
TF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/50	RNP APCH
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SA104	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	128 (133.3)	+5.6	6.0	-	+A3500	-	-	RNAV 1
TF	SA101	-	072 (077.5)	+5.6	5.0	L	@A3000	-	-	RNAV 1
TF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/50	RNP APCH
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SA105	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	043(048.5)	+5.6	6.0	-	+A3500	-	-	RNAV 1
TF	SA101	-	072 (077.5)	+5.6	5.0	R	@A3000	-	-	RNAV 1
TF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/50	RNP APCH
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SA106	-	-	+5.6	-	-	+A5000	-	-	RNAV 1
TF	SA102	-	342(347.4)	+5.6	6.0	-	+A3500	-	-	RNAV 1
TF	SA101	-	072 (077.5)	+5.6	5.0	R	@A3000	-	-	RNAV 1
TF	RWY07	Y	072 (077.5)	+5.6	5.8	-	-	-	-3.0/50	RNP APCH
CF	SA202	Y	072 (077.4)	+5.6	12.8	-	+A3000	-220	-	RNAV 1
DF	SA103	-	-	+5.6	-	L	+A5000	-220	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	SA103	252 (257.2)	R	A5000	A13000	-230	+5.6	RNAV 1	1min 00sec
Hold	SA106	286 (291.6)	L	A5000	A13000	-230	+5.6	RNAV 1	1min 00sec