



**INSTRUMENT APPROACH
CHART - ICAO**

AD ELEV 1583'
THR ELEV RWY26 1583'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

TASHKENT TOWER 120.4
EAST TOWER 134.0
EAST GROUND 135.0

**TASHKENT/UZTP
VOSTOCHNY**

ILS N CAT II & III OR LOC N
RWY26

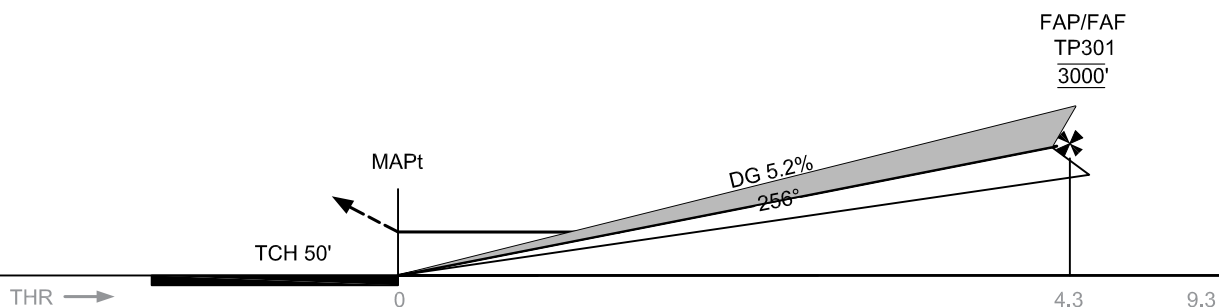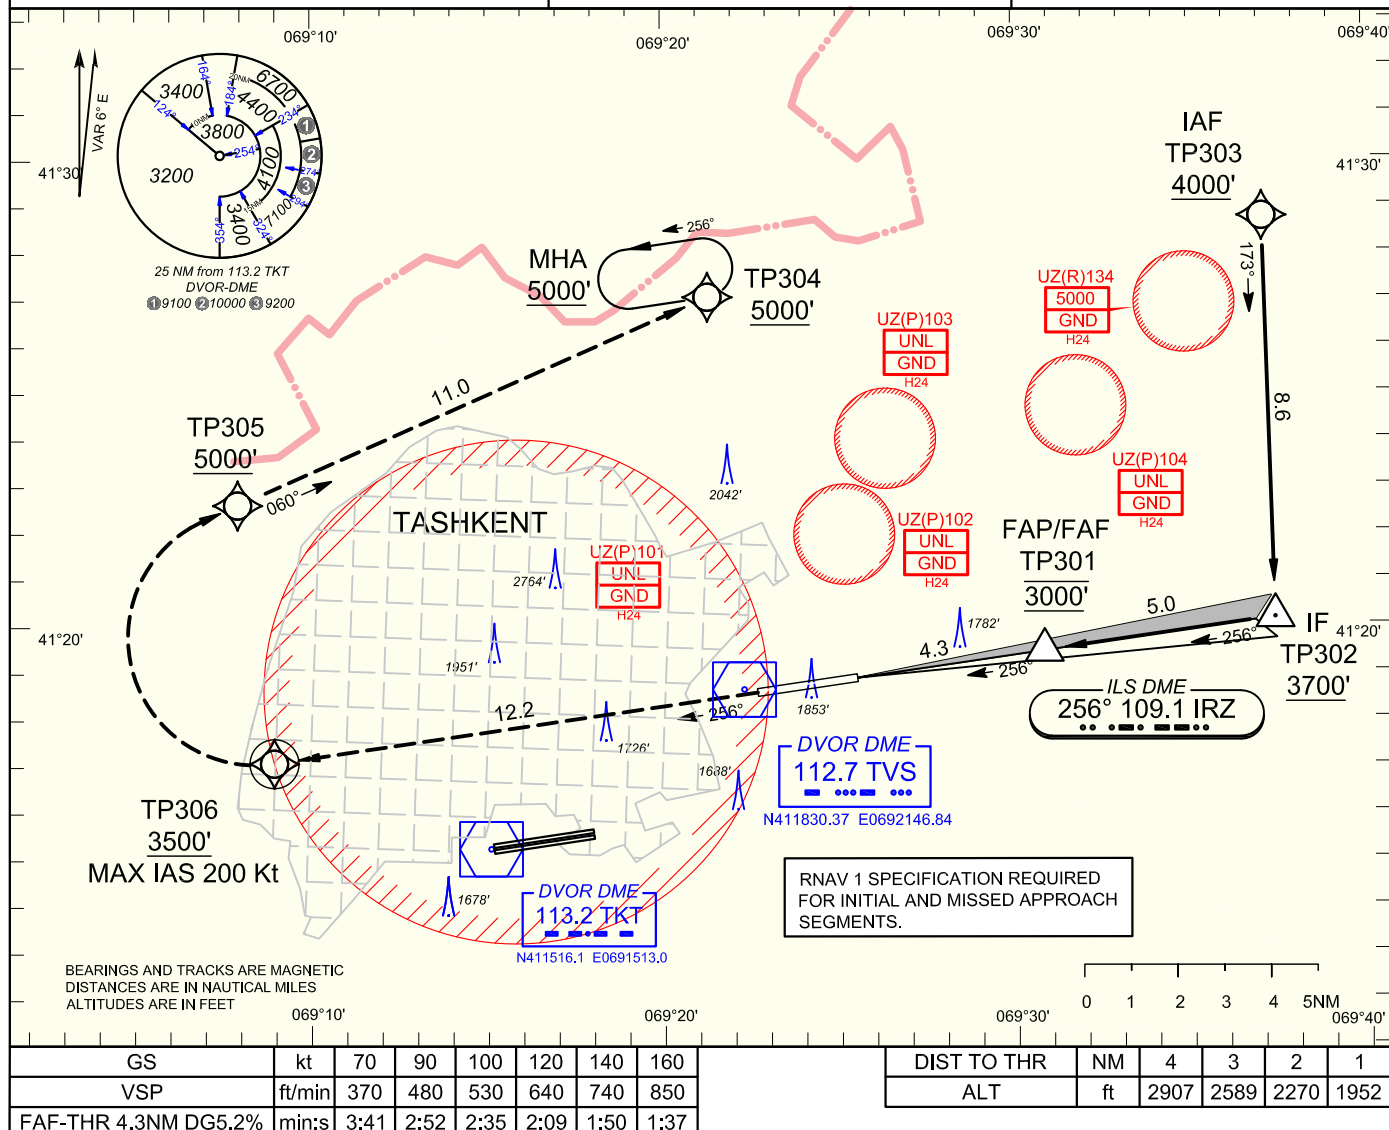

CAT OF ACFT			A	B	C	D
OCA (H) STRAIGHT-IN	ILS	CAT III	APPROVED			
		CAT II	1683 (100)			
		CAT I	1783 (200)			
	LOC		-	-	-	-
	VOR-DME					

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE AD2.24-6.X.1

INSTRUMENT APPROACH PROCEDURE - ILS to RNAV (GNSS) N RWY26

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	TP303	-	-	+5.5	-	-	+A4000	-	-	RNAV 1
TF	TP302	-	173 (178.3)	+5.5	8.6	-	+A3700	-	-	RNAV 1
CF	TP301	-	256 (261.9)	+5.5	5.0	R	@A3000	-	-	
CF	RW26R	Y	256 (261.9)	+5.5	4.3	-	-	-	-3.0°/50	
CF	TP306	Y	256 (261.8)	+5.5	12.2	-	+A3500	-200	-	
DF	TP305	-		+5.5		R	+A5000	-	-	RNAV 1
TF	TP304	-	060 (066.1)	+5.5	11.0	-	+A5000	-	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course, ° M (T)	Leg distance (NM)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	TP304	076 (081.8)	-	L	A5000	-	-	+5.5	RNAV1	1min 00sec below A13000