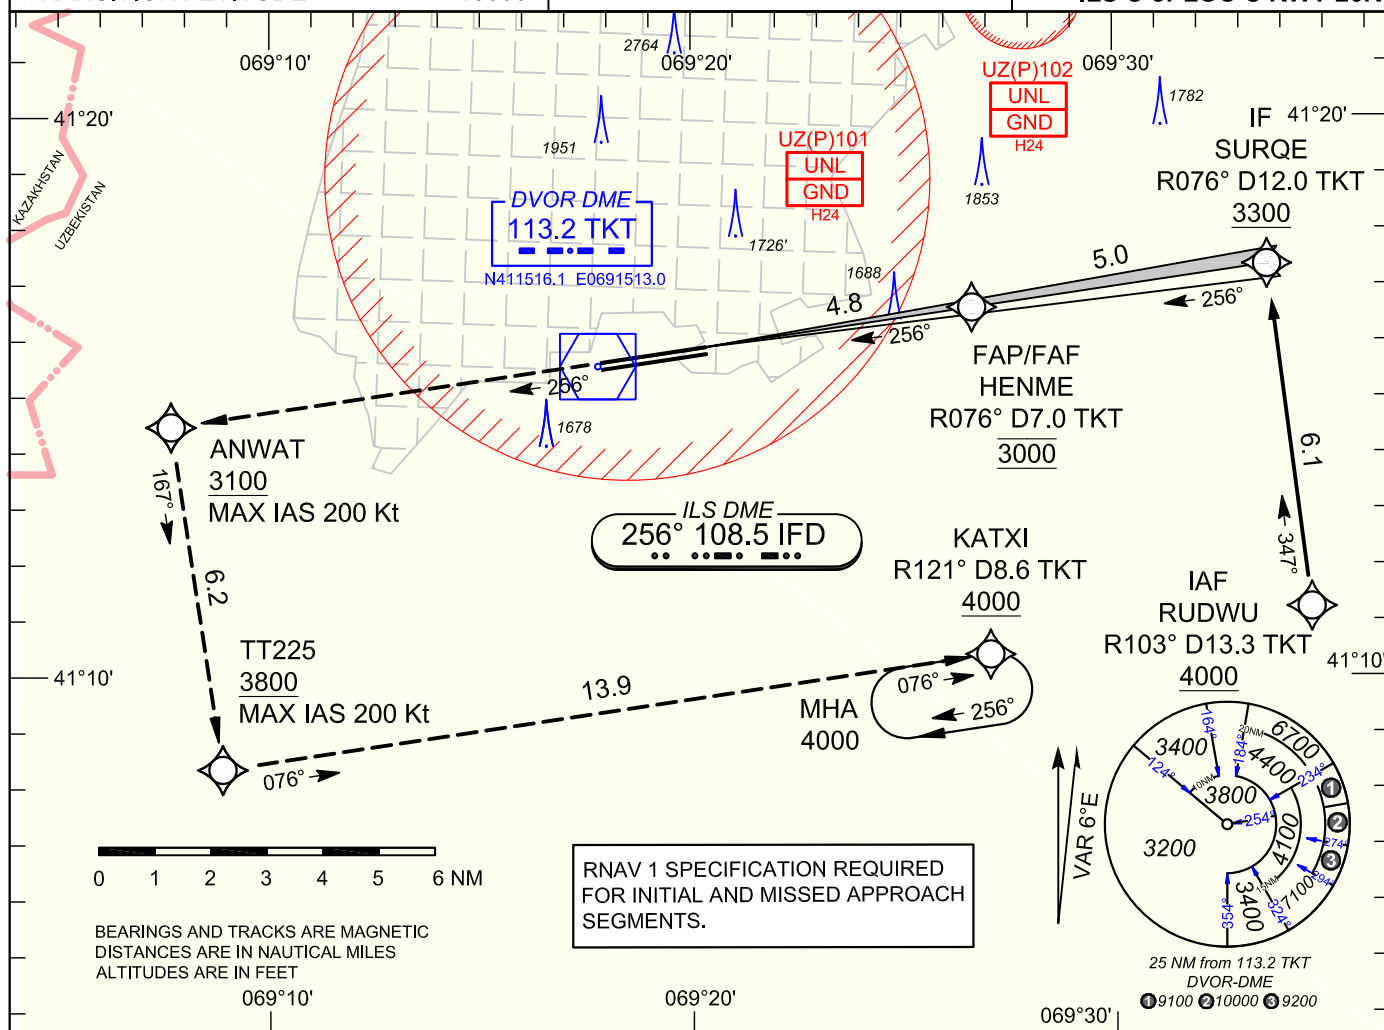


**INSTRUMENT APPROACH
CHART - ICAO**

AD ELEV 1417
THR ELEV 1414
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
120.4

**TASHKENT/UZTT
ISLAM KARIMOV****ILS C or LOC C RWY 26R**

0 1 2 3 4 5 6 NM

BEARINGS AND TRACKS ARE MAGNETIC
DISTANCES ARE IN NAUTICAL MILES
ALTITUDES ARE IN FEET

RNAV 1 SPECIFICATION REQUIRED
FOR INITIAL AND MISSED APPROACH
SEGMENTS.


VAR 6°E

25 NM from 113.2 TKT
DVOR-DME
① 9100 ② 10000 ③ 9200

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAP/FAF-MAPt 4.8NM DES Gradient 5.2%	min:s	4:07	3:12	2:53	2:24	2:03	1:48

DIST TO IFD	NM	0.5	1.0	2.0	3.0	4.0
DIST TO TKT	NM	2.4	2.9	3.9	4.9	5.9
ALT	ft	1547	1707	2026	2345	2664
HEIGHT	m	41	90	187	284	381

ILS DME reads zero
at THR RWY26R

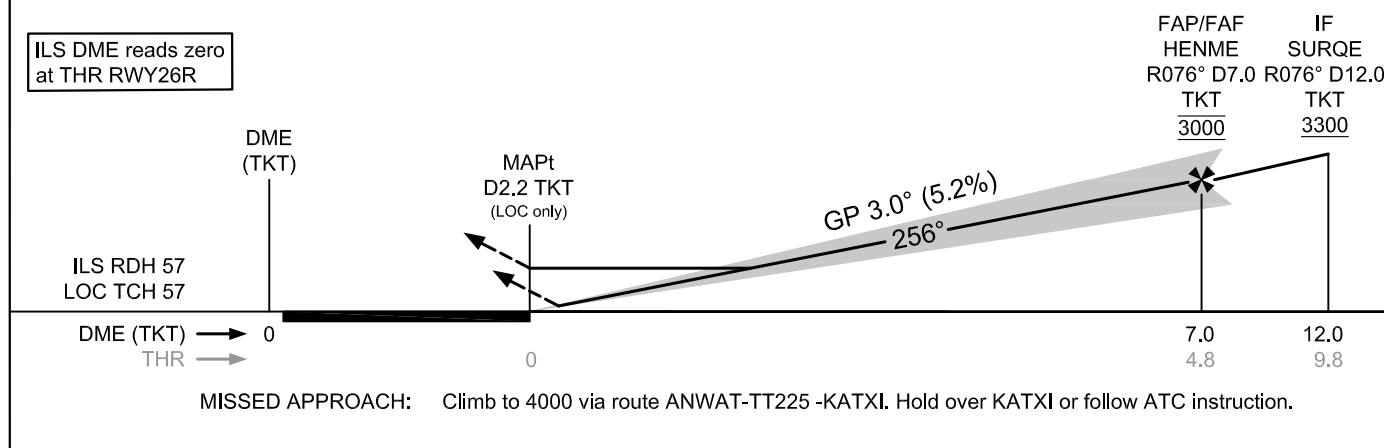

MISSED APPROACH: Climb to 4000 via route ANWAT-TT225 -KATXI. Hold over KATXI or follow ATC instruction.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	CAT I	1613 (200)	1613 (200)	1616 (202)	1626 (212)
	LOC	1880 (470)			

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE AD2.24-6.X

INSTRUMENT APPROACH PROCEDURE - ILS C to RNAV 1 (GNSS) - RWY26R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	RUDWU	-	-	+5.5	-	-	+A4000	-	-	RNAV 1
TF	SURQE	-	347 (352.8)	+5.5	6.1	-	+A3300	-	-	RNAV 1
TF	HENME	-	256 (261.9)	+5.5	5.0	L	@A3000	-	-	-
TF	RW26R	Y	256 (261.8)	+5.5	4.8	-	-	-	-3.0/57	-
CF	ANWAT	-	256 (261.7)	+5.5	—	-	+A3100	-200	-	RNAV 1
TF	TT225	-	167 (173.0)	+5.5	6.2	L	+A3800	-200	-	RNAV 1
TF	KATXI	-	076 (081.4)	+5.5	13.9	L	+A4000	-	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	KATXI	076 (081.4)	R	A4000	-	-	+5.5	RNAV1	