


**STANDARD DEPARTURE CHART
INSTRUMENT (SID)- ICAO**

AD ELEV 1568'
THR ELEV 1551'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

NAMANGAN APPROACH 125.6
ANDIJAN TOWER 128.0
(reserve) 129.0

**ANDIJAN/UZFA
RNP (GNSS) RWY04**

APTIN 3E, DIKRI 3E,
MIKDI 3E, RUBVU 3E.

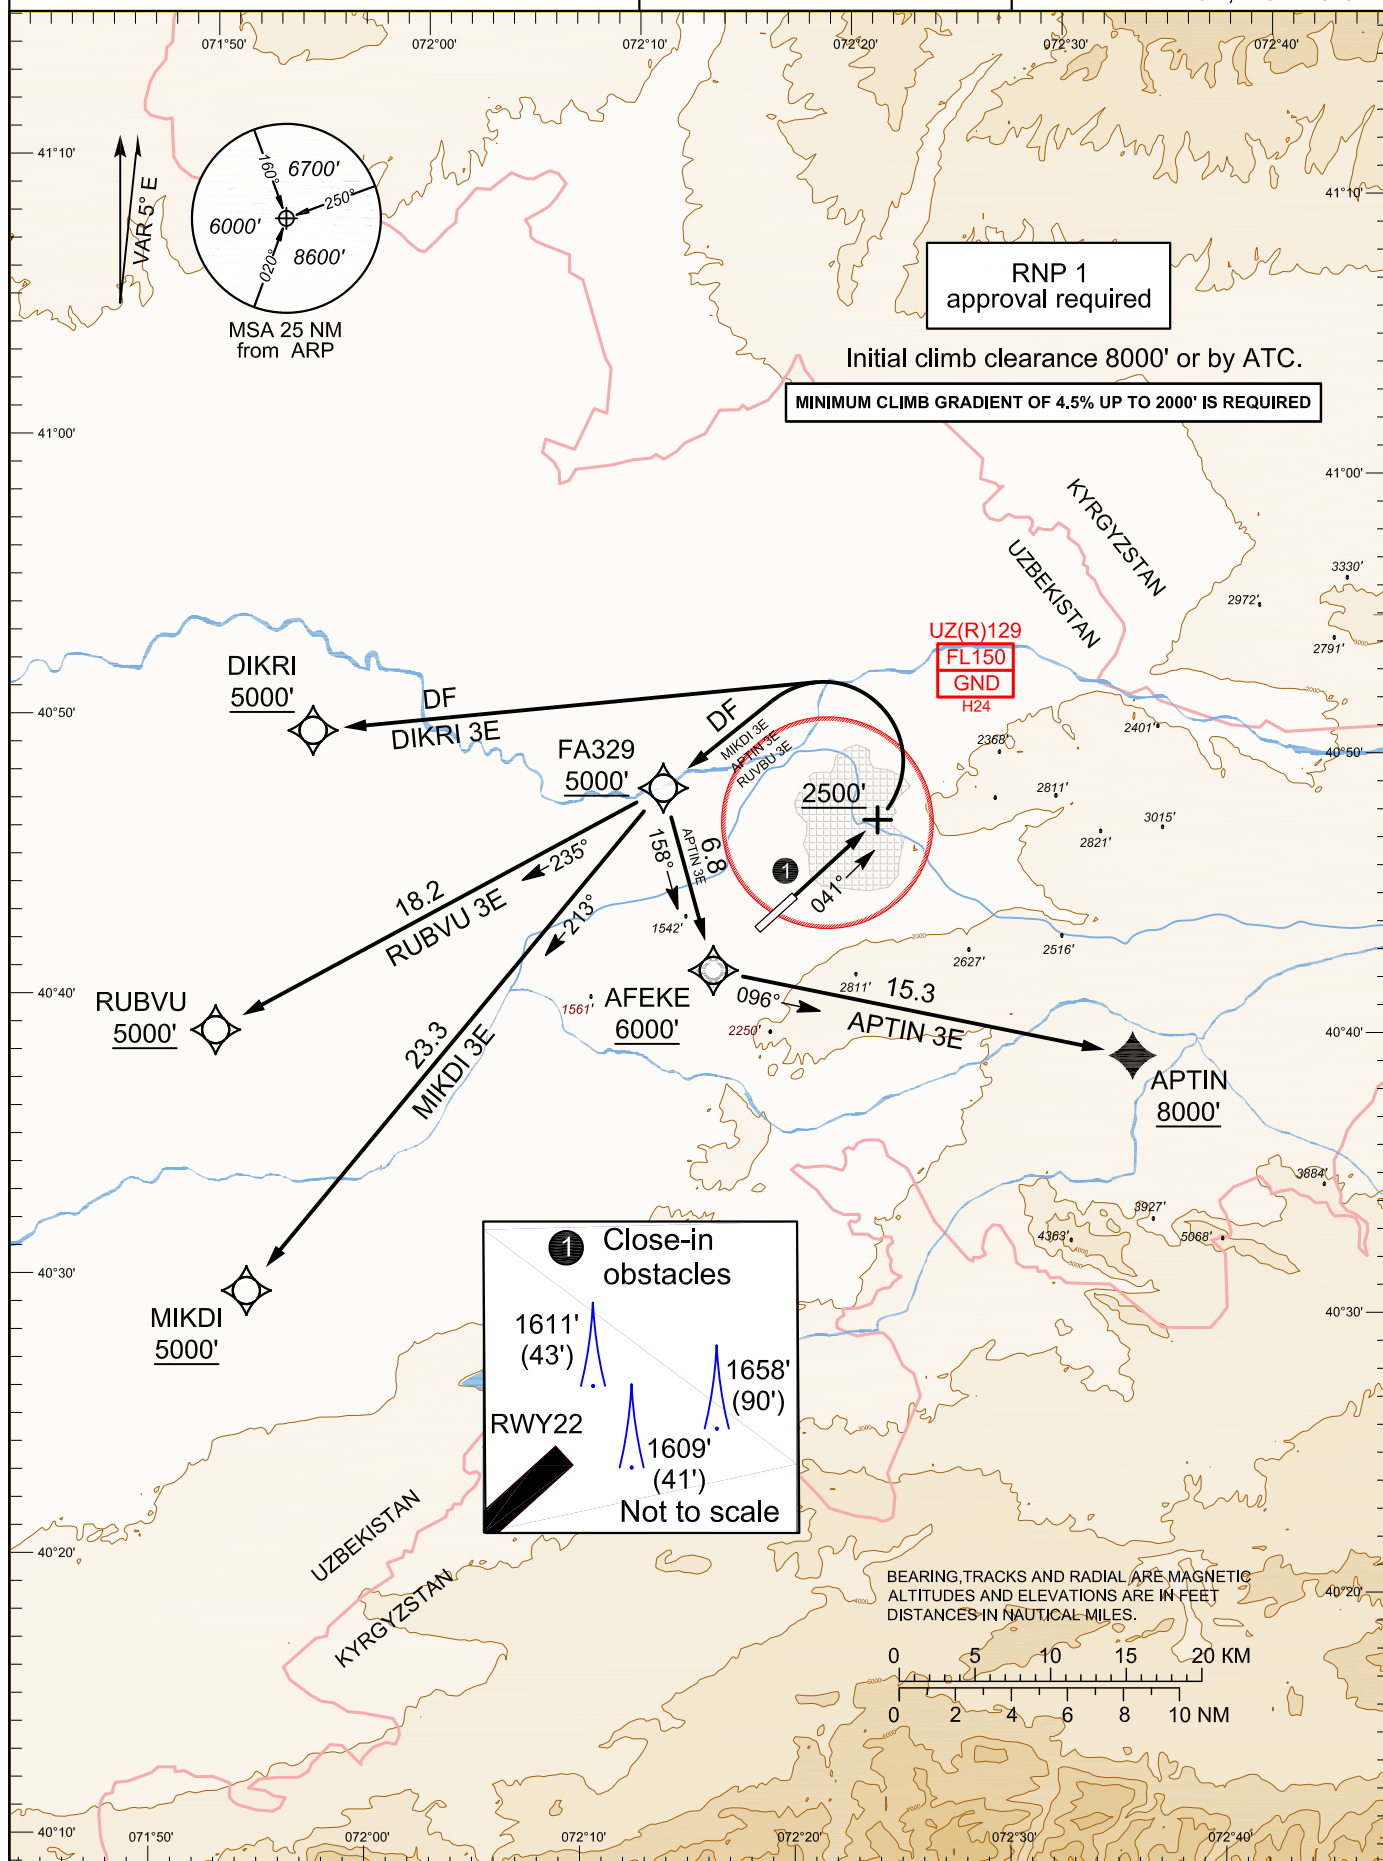

STANDARD DEPARTURE ROUTES - RNP (GNSS) INSTRUMENTAL - RWY04

GENERAL: Initial climb clearance 8000' or by ATC.
Maximum speed below 10000': IAS 250 KT unless
otherwise stated under Speed Limit, or instructed by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

APTIN 3E

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	041 (045.7)	+5.0	-	-	+A2500	-	RNP 1	PDG 4.5% UP TO 2000'
DF	FA329	-	-	+5.0	-	L	+A5000	-	RNP 1	
TF	AFEKE	-	158 (162.9)	+5.0	6.8	L	+A6000	-	RNP 1	
TF	APTIN	-	096 (101.5)	+5.0	15.3	L	+A8000	-	RNP 1	

DIKRI 3E

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	041 (045.7)	+5.0	-	-	+A2500	-	RNP 1	PDG 4.5% UP TO 2000'
DF	DIKRI	-	-	+5.0	-	L	+A5000	-	RNP 1	

MIKDI 3E

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	041 (045.7)	+5.0	-	-	+A2500	-	RNP 1	PDG 4.5% UP TO 2000'
DF	FA329	-	-	+5.0	-	L	+A5000	-	RNP 1	
TF	MIKDI	-	213 (217.8)	+5.0	23.3	L	+A5000	-	RNP 1	

RUBVU 3E

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	041 (045.7)	+5.0	-	-	+A2500	-	RNP 1	PDG 4.5% UP TO 2000'
DF	FA329	-	-	+5.0	-	L	+A5000	-	RNP 1	
TF	RUBVU	-	235 (239.8)	+5.0	18.2	R	+A5000	-	RNP 1	