


**STANDARD DEPARTURE CHART
INSTRUMENT (SID)- ICAO**

AD ELEV 1568
THR ELEV 1568'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

NAMANGAN APPROACH 125.6
ANDIJAN TOWER 128.0
(reserve) 129.0

**ANDIJAN/UZFA
RNP (GNSS) RWY22**

APTIN 3F, DIKRI 3F,
MIKDI 3F, RUBVU 3F.

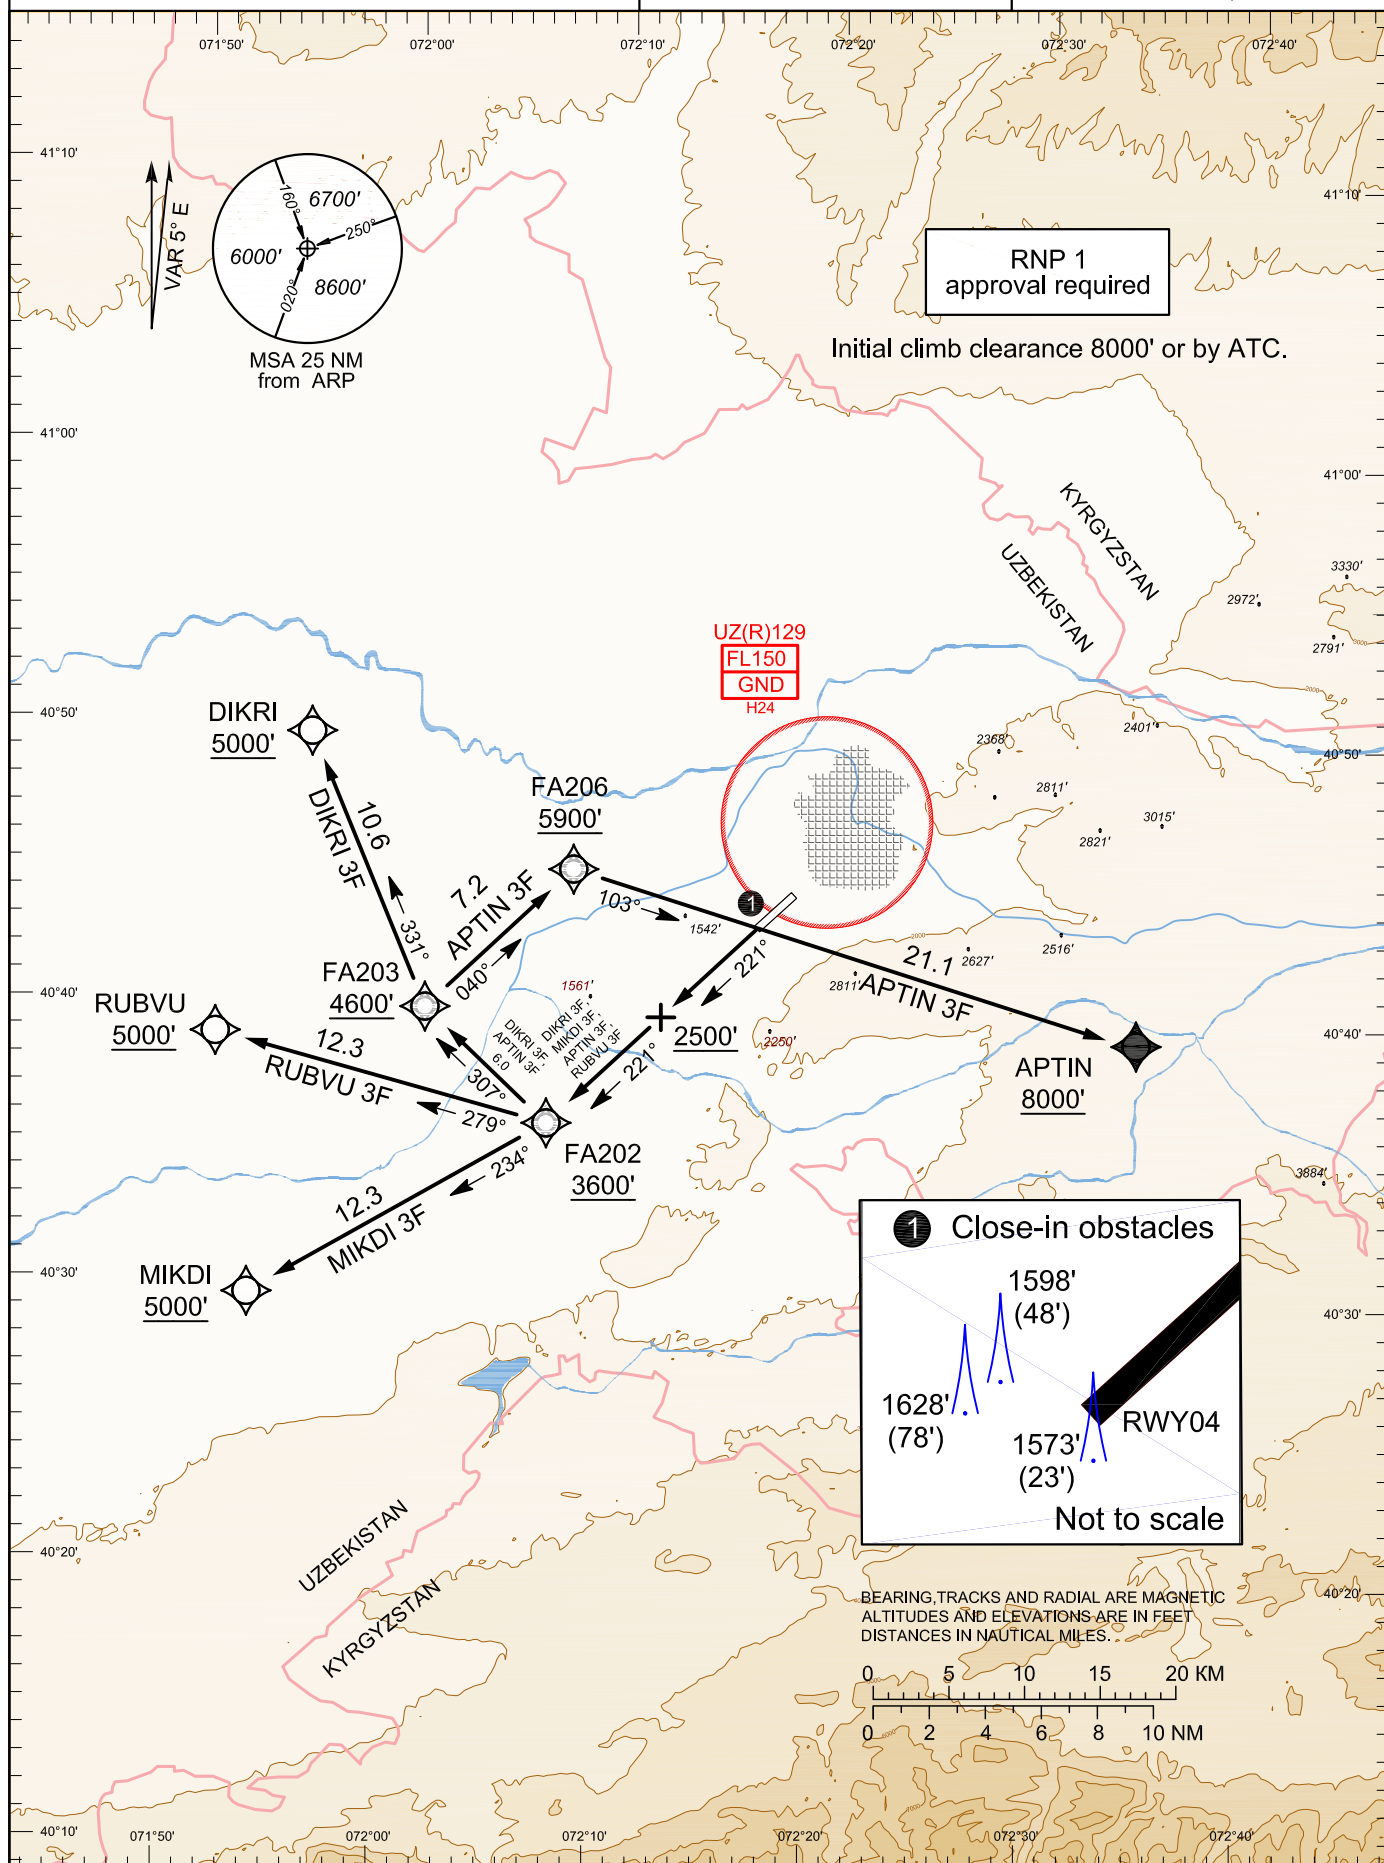

STANDARD DEPARTURE ROUTES - RNP (GNSS) INSTRUMENTAL - RWY22

GENERAL: Initial climb clearance 8000' or by ATC.
Maximum speed below 10000': IAS 250 KT unless
otherwise stated under Speed Limit, or instructed by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

APTIN 3F

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	221(225.7)	+5.0	-	-	+A2500	-	RNP 1	
CF	FA202	-	221(225.7)	+5.0	-	-	+A3600	-	RNP 1	
TF	FA203	-	307(312.1)	+5.0	6.0	R	+A4600	-	RNP 1	
TF	FA206	-	040(045.4)	+5.0	7.2	R	+A5900	-	RNP 1	
TF	APTIN	-	103(107.8)	+5.0	21.1	R	+A8000	-	RNP 1	

DIKRI 3F

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	221(225.7)	+5.0	-	-	+A2500	-	RNP 1	
CF	FA202	-	221(225.7)	+5.0	-	-	+A3600	-	RNP 1	
TF	FA203	-	307(312.1)	+5.0	6.0	R	+A4600	-	RNP 1	
TF	DIKRI	-	331(335.9)	+5.0	10.6	R	+A5000	-	RNP 1	

MIKDI 3F

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	221(225.7)	+5.0	-	-	+A2500	-	RNP 1	
CF	FA202	-	221(225.7)	+5.0	-	-	+A3600	-	RNP 1	
TF	MIKDI	-	234(239.0)	+5.0	12.3	R	+A5000	-	RNP 1	

RUBVU 3F

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	221(225.7)	+5.0	-	-	+A2500	-	RNP 1	
CF	FA202	-	221(225.7)	+5.0	-	-	+A3600	-	RNP 1	
TF	RUBVU	-	279(283.9)	+5.0	12.3	R	+A5000	-	RNP 1	