


**STANDARD ARRIVAL CHART
INSTRUMENT (STAR)- ICAO**

AD ELEV 1568'
THR ELEV 1551'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

NAMANGAN APPROACH 125.6
ANDIJAN TOWER 128.0
(reserve) 129.0

**ANDIJAN/UZFA
RNP (GNSS) RWY04**

APTIN 3V, DIKRI 3V,
MIKDI 3V, RUBVU 3V.

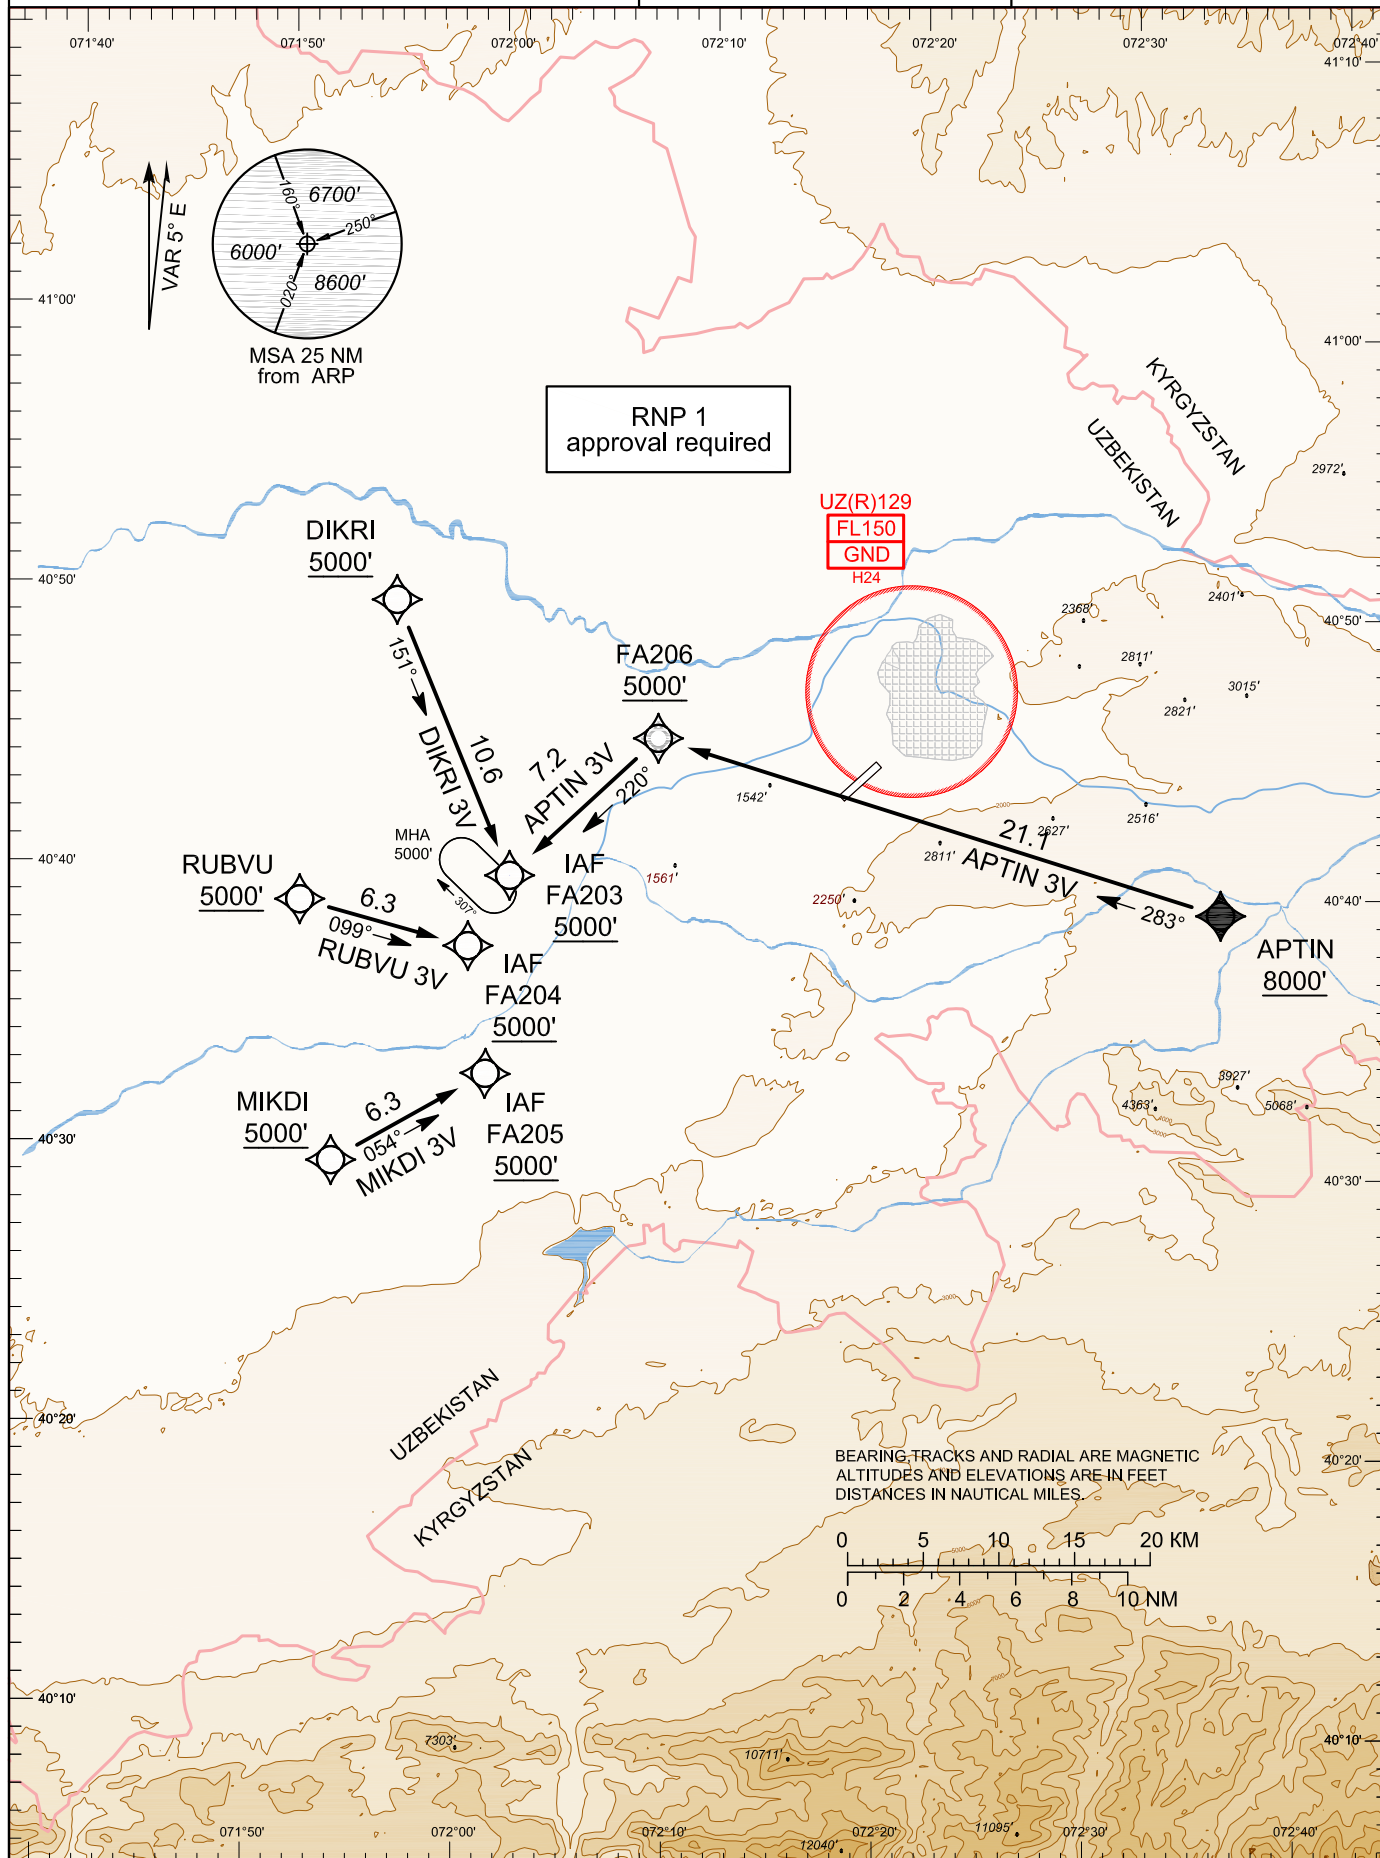

RNP STANDART ARRIVAL PROCEDURE - RWY04

GENERAL: Maximum speed below 10000': IAS 250 KT unless otherwise stated under Speed Limit, or instructed by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

APTIN 3V

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	APTIN	-	-	+5.0	-	-	+A8000	-	RNP 1	
TF	FA206	-	283(287.8)	+5.0	21.1	-	+A5000	-	RNP 1	
TF	FA203	-	220(225.5)	+5.0	7.2	L	+A5000	-	RNP 1	

DIKRI 3V

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DIKRI	-	-	+5.0	-	-	+A5000	-	RNP 1	
TF	FA203	-	151(155.9)	+5.0	10.6	-	+A5000	-	RNP 1	

MIKDI 3V

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	MIKDI	-	-	+5.0	-	-	+A5000	-	RNP 1	
TF	FA205	-	054(058.8)	+5.0	6.3	-	+A5000	-	RNP 1	

RUBVU 3V

Path Descriptor	WPT Identifier	Fly-over	Course/Track, ° M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	RUBVU	-	-	+5.0	-	-	+A5000	-	RNP 1	
TF	FA204	-	099(103.7)	+5.0	6.3	-	+A5000	-	RNP 1	

Path Descriptor	WPT Identifier	Inbound course, ° M (T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	FA203	127(132.0)	R	A5000	A13000	-230	+5.0	RNP 1	1min 00sec at or below 13000'