


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 321'
THR ELEV 318'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

URGENCH TOWER 118.3
URGENCH APPROACH 126.0

**URGENCH/UZNU
RNAV (GNSS) RWY31**

AZREF 2E, DARVA 2E, DIKNA 2E,
EVTEV 2E, MAKIX 2E, NESVA 2E,
OTBOR 2E, SOVOD 2E, VASIM 2E.

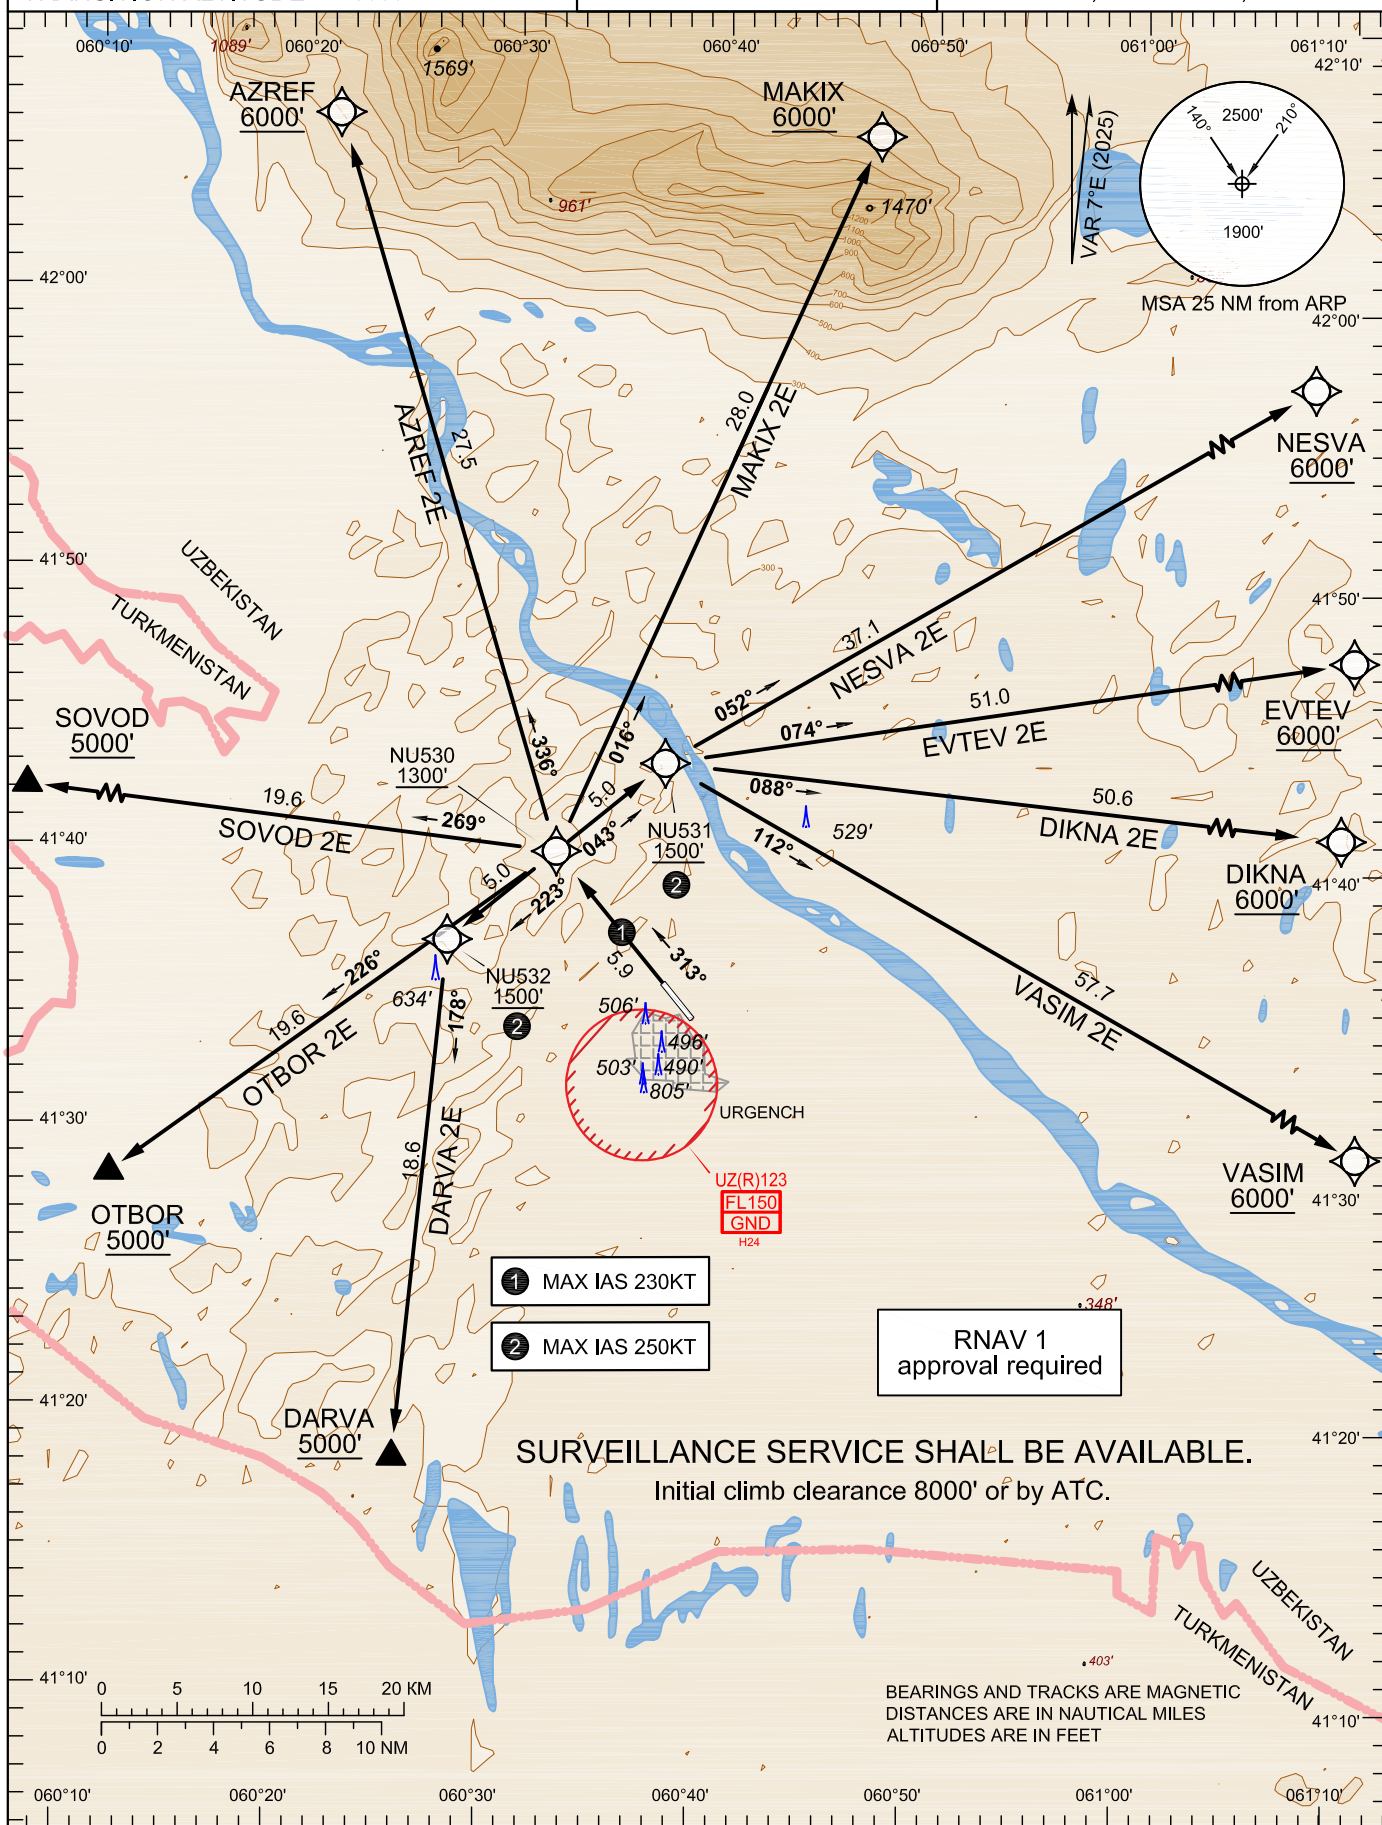

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY31**GENERAL:**

Surveillance service shall be available.
Initial climb clearance 8000' or instructed by ATC.
Maximum speed below 10000': IAS 250 KT unless otherwise stated under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

AZREF 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	AZREF	-	336 (342.2)	+6.8	27.5	R	+A6000	-	RNAV 1	

DARVA 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	NU532	-	223 (229.5)	+6.6	5.0	L	+A1500	-250	RNAV 1	
TF	DARVA	-	178 (184.5)	+6.6	18.6	L	+A5000	-	RNAV 1	

DIKNA 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	NU531	-	043 (049.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	DIKNA	-	088 (095.1)	+6.6	50.6	R	+A6000	-	RNAV 1	

EVTEV 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	NU531	-	043 (049.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	EVTEV	-	074 (080.3)	+6.6	51.0	R	+A6000	-	RNAV 1	

MAKIX 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	MAKIX	-	016 (022.9)	+6.8	28.0	R	+A6000	-	RNAV 1	

Continued on the next page

NESVA 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	NU531	-	043 (049.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	NESVA	-	052 (058.7)	+6.7	37.1	R	+A6000	-	RNAV 1	

OTBOR 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	OTBOR	-	226 (232.9)	+6.6	19.6	L	+A5000	-	RNAV 1	

SOVOD 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	SOVOD	-	269 (275.6)	+6.7	19.6	L	+A5000	-	RNAV 1	

VASIM 2E

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU530	-	313 (319.5)	+6.6	5.9	-	+A1300	-230	RNAV 1	
TF	NU531	-	043 (049.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	VASIM	-	112 (118.4)	+6.6	57.7	R	+A6000	-	RNAV 1	