


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 321'
THR ELEV 319'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

URGENCH TOWER 118.3
URGENCH APPROACH 126.0

**URGENCH/UZNU
RNAV (GNSS) RWY13**

AZREF 2G, DARVA 2G, DIKNA 2G,
EVTEV 2G, MAKIX 2G, NESVA 2G,
OTBOR 2G, SOVOD 2G, VASIM 2G.

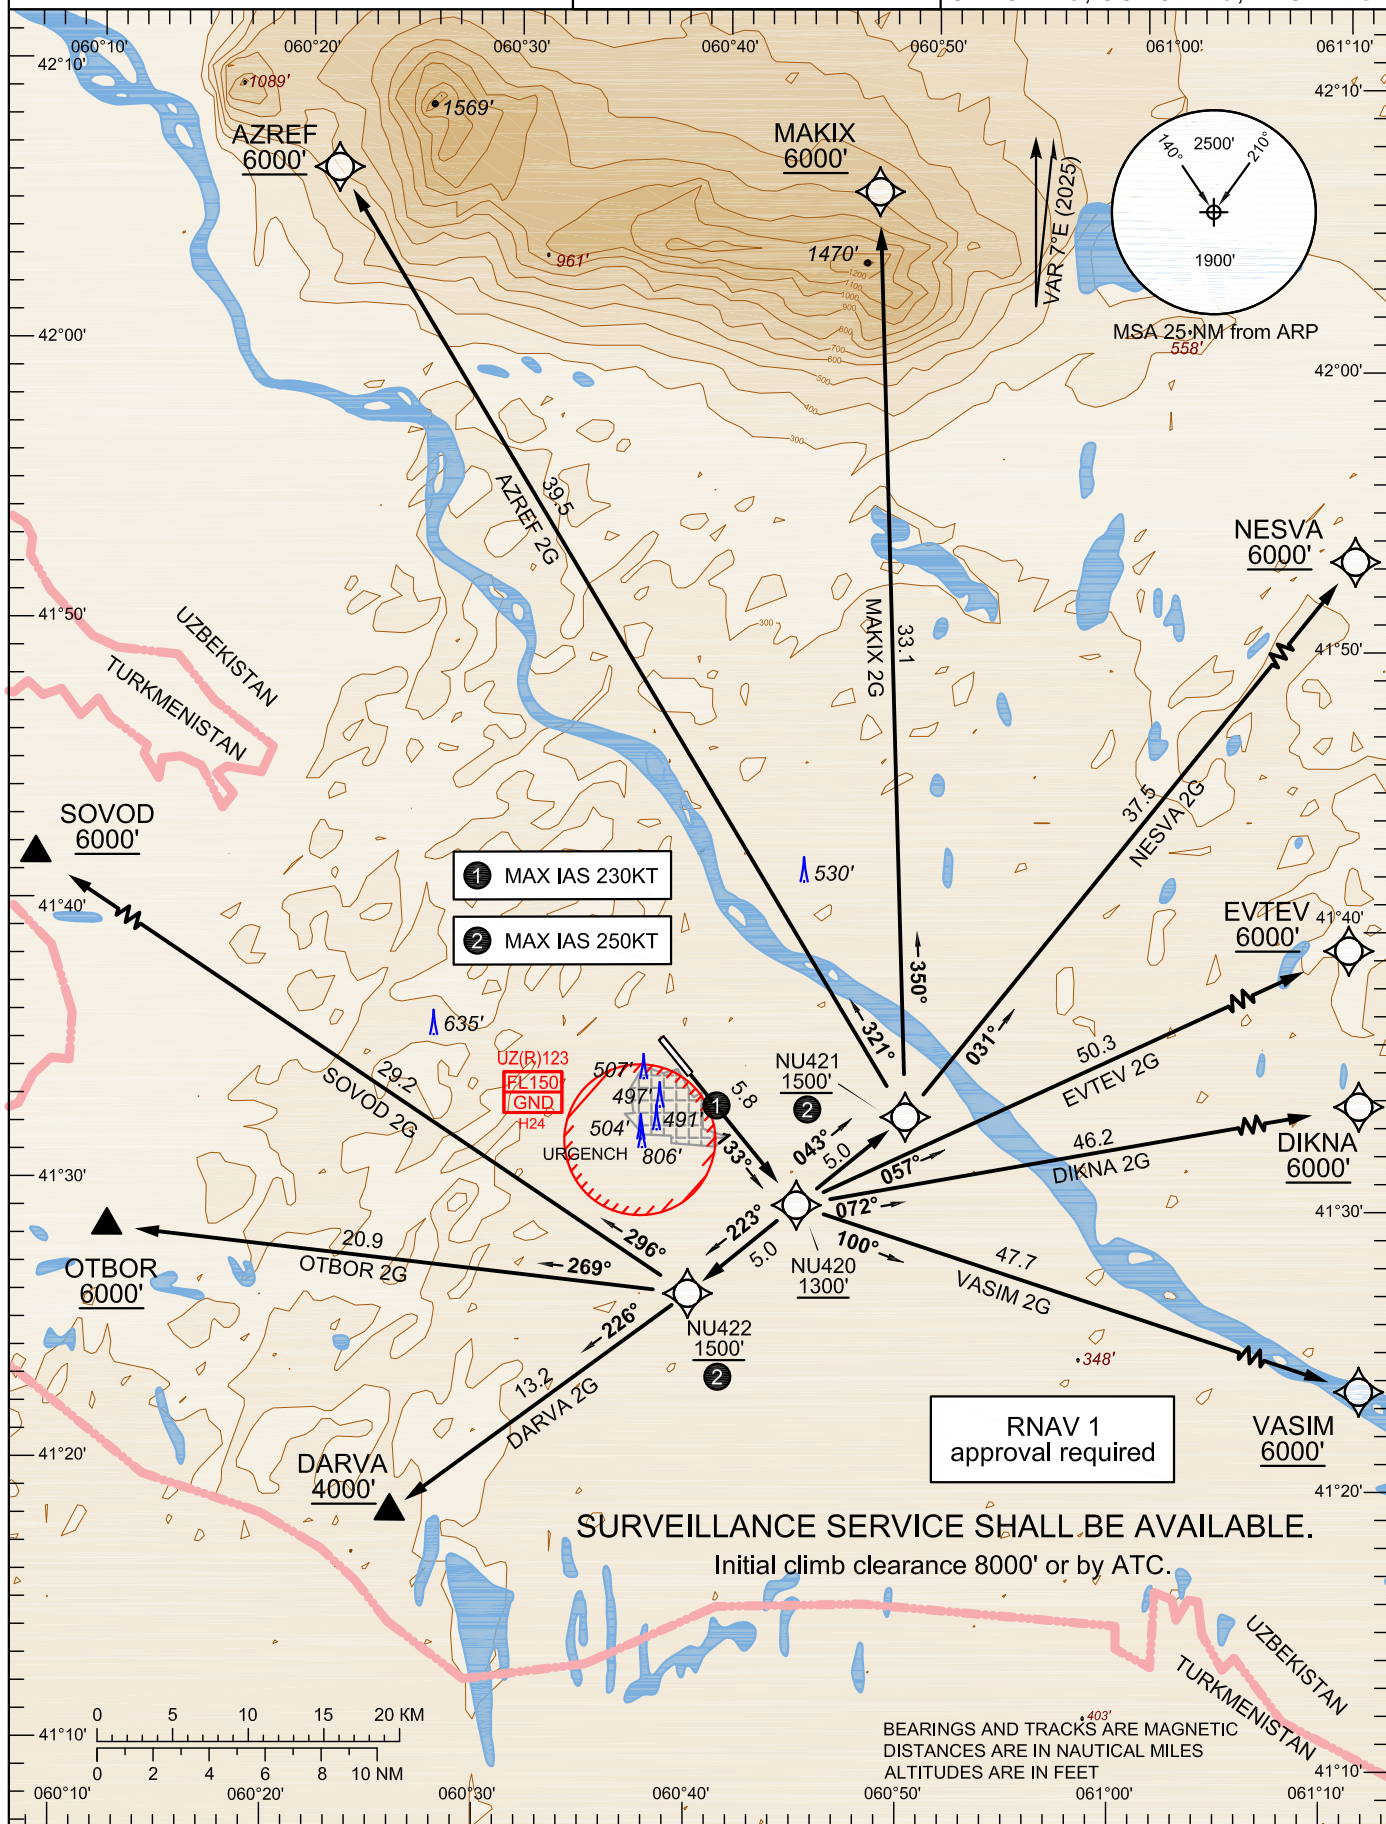

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY13

GENERAL:

Surveillance service shall be available.
Initial climb clearance 8000' or instructed by ATC.
Maximum speed below 10000': IAS 250 KT unless otherwise stated
under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

AZREF 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	NU421	-	043 (049.5)	+6.6	5.0	L	+A1500	-250	RNAV 1	
TF	AZREF	-	321 (327.8)	+6.7	39.5	L	+A6000	-	RNAV 1	

DARVA 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	NU422	-	223 (229.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	DARVA	-	226 (232.3)	+6.5	13.2	R	+A4000	-	RNAV 1	

DIKNA 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	DIKNA	-	072 (078.6)	+6.6	46.2	L	+A6000	-	RNAV 1	

EVTEV 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	EVTEV	-	057 (063.8)	+6.6	50.3	L	+A6000	-	RNAV 1	

MAKIX 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	NU421	-	043 (049.5)	+6.6	5.0	L	+A1500	-250	RNAV 1	
TF	MAKIX	-	350 (357.0)	+6.6	33.1	L	+A6000	-	RNAV 1	

Continued on the next page

NESVA 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	NU421	-	043 (049.5)	+6.6	5.0	L	+A1500	-250	RNAV 1	
TF	NESVA	-	031 (037.6)	+6.6	37.5	L	+A6000	-	RNAV 1	

OTBOR 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	NU422	-	223 (229.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	OTBOR	-	269 (275.2)	+6.6	20.9	R	+A6000	-	RNAV 1	

SOVOD 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	NU422	-	223 (229.5)	+6.6	5.0	R	+A1500	-250	RNAV 1	
TF	SOVOD	-	296 (302.5)	+6.6	29.2	R	+A6000	-	RNAV 1	

VASIM 2G

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	NU420	-	133 (139.5)	+6.6	5.8	-	+A1300	-230	RNAV 1	
TF	VASIM	-	100 (106.9)	+6.4	47.7	L	+A6000	-	RNAV 1	