


URGENCH/UZNU
RNAV (GNSS) RWY31

AZREF 2Q, DARVA 2Q, DIKNA 2Q,
EVTEV 2Q, MAKIX 2Q, NESVA 2Q,
OTBOR 2Q, SOVOD 2Q, VASIM 2Q.

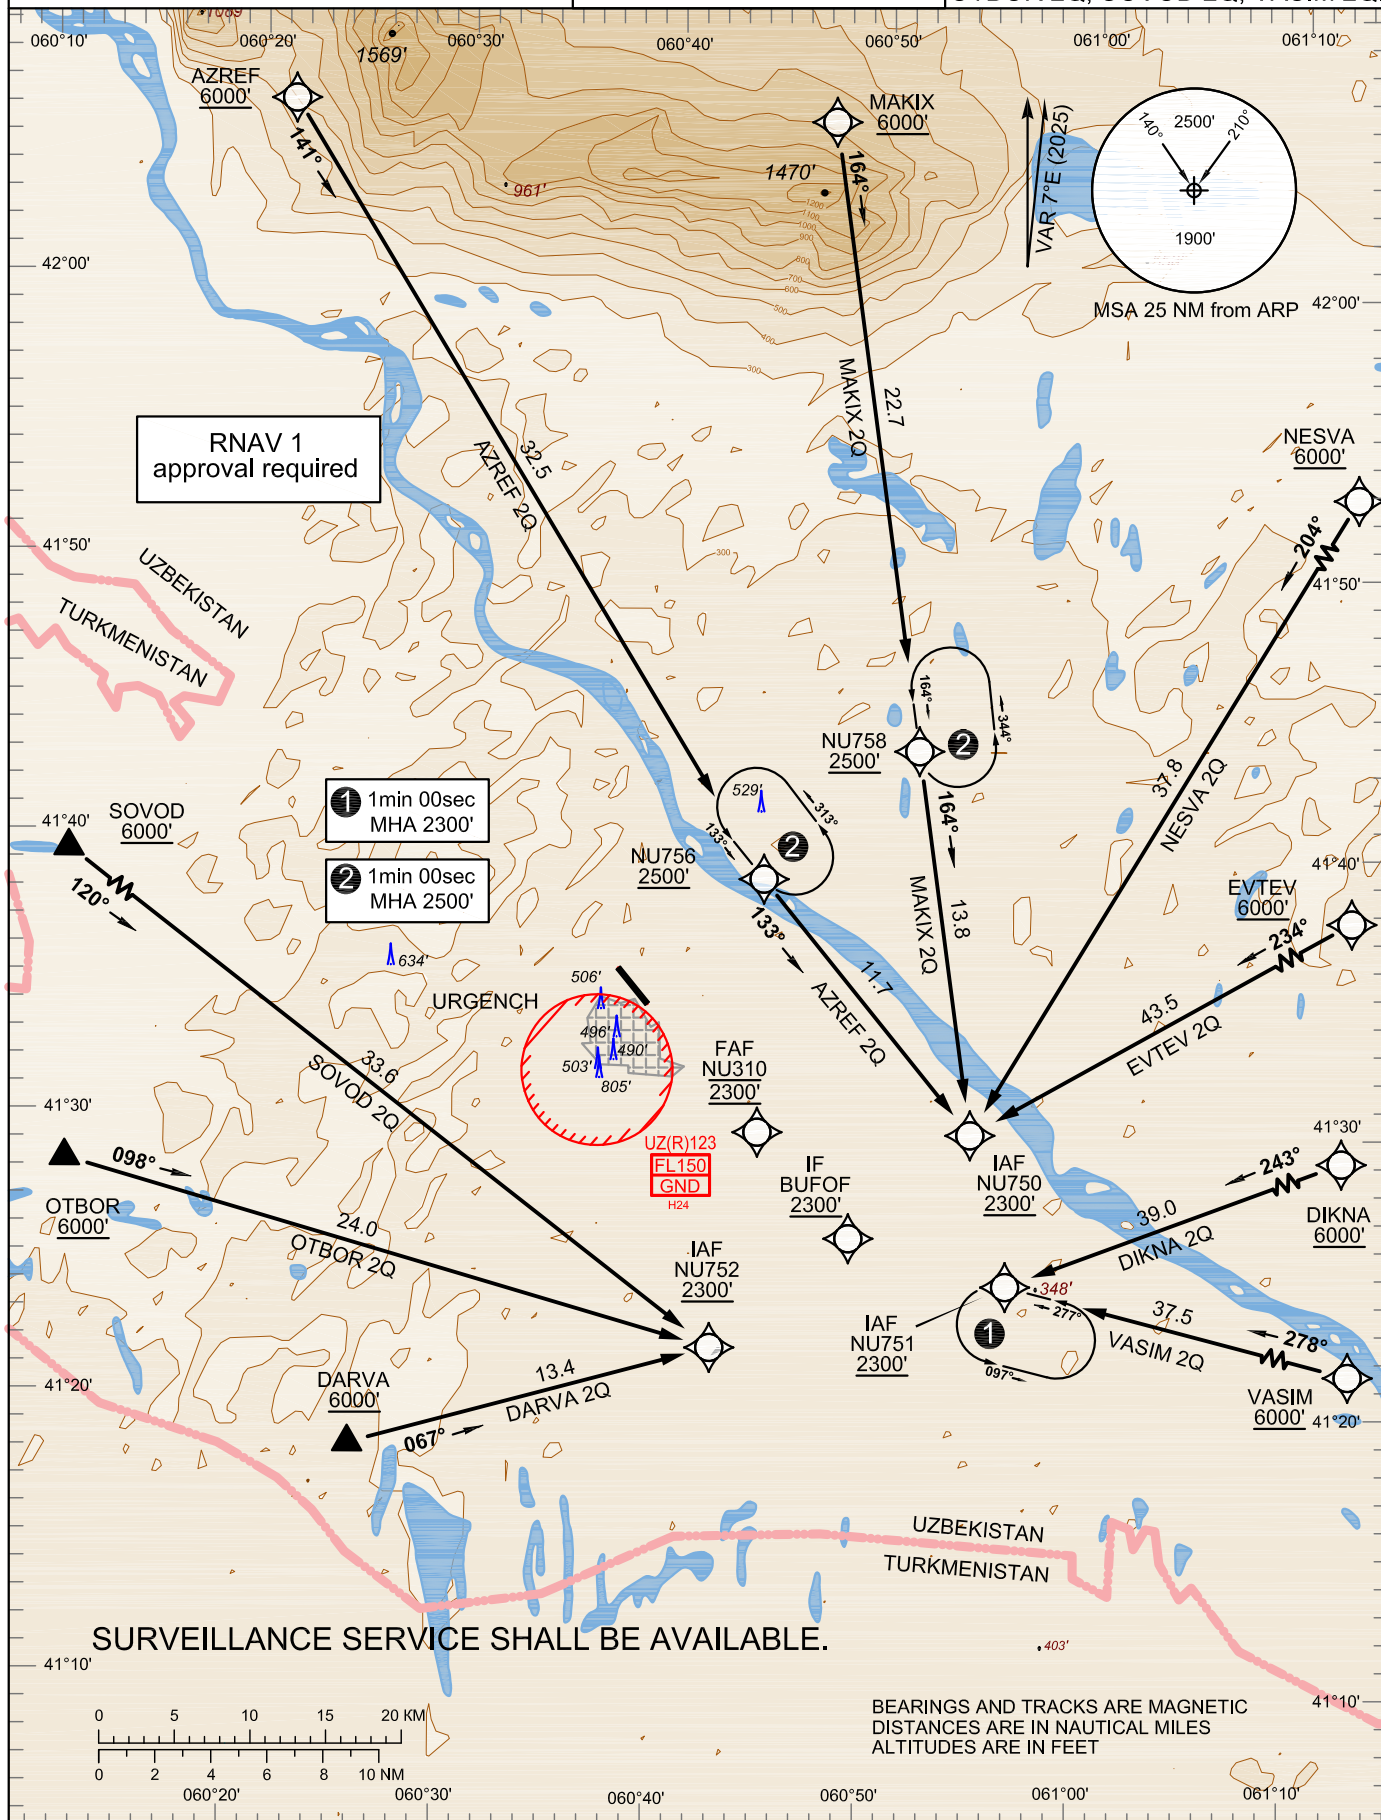

RNAV STANDARD ARRIVAL PROCEDURE - RWY31

GENERAL:

Surveillance service shall be available.
Maximum speed below 10000': IAS 250 KT unless otherwise stated
under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

AZREF 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	AZREF	-	-	+6.8	-	-	+A6000	-	RNAV 1	
TF	NU756	-	141 (147.4)	+6.5	32.5	-	+A2500	-	RNAV 1	
TF	NU750	-	133 (139.78)	+6.5	11.7	L	+A2300	-	RNAV 1	

DARVA 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DARVA	-	-	+6.5	-	-	+A6000	-	RNAV 1	
TF	NU752	-	067 (073.7)	+6.5	13.4	-	+A2300	-	RNAV 1	

DIKNA 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DIKNA	-	-	+6.5	-	-	+A6000	-	RNAV 1	
TF	NU751	-	243 (249.2)	+6.5	39.0	-	+A2300	-	RNAV 1	

EVTEV 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	EVTEV	-	-	+6.6	-	-	+A6000	-	RNAV 1	
TF	NU750	-	234 (240.2)	+6.5	43.5	-	+A2300	-	RNAV 1	

MAKIX 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	MAKIX	-	-	+6.8	-	-	+A6000	-	RNAV 1	
TF	NU758	-	164 (171.1)	+6.8	22.7	-	+A2500	-	RNAV 1	
TF	NU750	-	164 (171.2)	+6.5	13.8	-	+A2300	-	RNAV 1	

Continued on the next page

NESVA 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	NESVA	-	-	+6.7	-	-	+A6000	-	RNAV 1	
TF	NU750	-	204 (210.4)	+6.6	37.8	-	+A2300	-	RNAV 1	

OTBOR 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	OTBOR	-	-	+6.6	-	-	+A6000	-	RNAV 1	
TF	NU752	-	098 (104.7)	+6.6	24.0	-	+A2300	-	RNAV 1	

SOVOD 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	SOVOD	-	-	+6.7	-	-	+A6000	-	RNAV 1	
TF	NU752	-	120 (126.2)	+6.6	33.6	-	+A2300	-	RNAV 1	

VASIM 2Q

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	VASIM	-	-	+6.6	-	-	+A6000	-	RNAV 1	
TF	NU751	-	278 (284.0)	+6.6	37.5	-	+A2300	-	RNAV 1	

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	NU751	277 (283.3)	L	A2300	A13000	-230	+6.6	RNAV 1	1min 00sec
Hold	NU758	164(171.1)	L	A2500	A13000	-230	+6.6	RNAV 1	1min 00sec
Hold	NU756	133(139.8)	L	A2500	A13000	-230	+6.6	RNAV 1	1min 00sec