


KARSHI/UZSK
RNAV (GNSS) RWY16

ARBEB 1B, DERKI 1B, ERNUX 1B,
IGZAF 1B, NIBTI 1B, OKDOR 1B,
RATAR 1B, TOLIB 1B, TUDLI 1B.

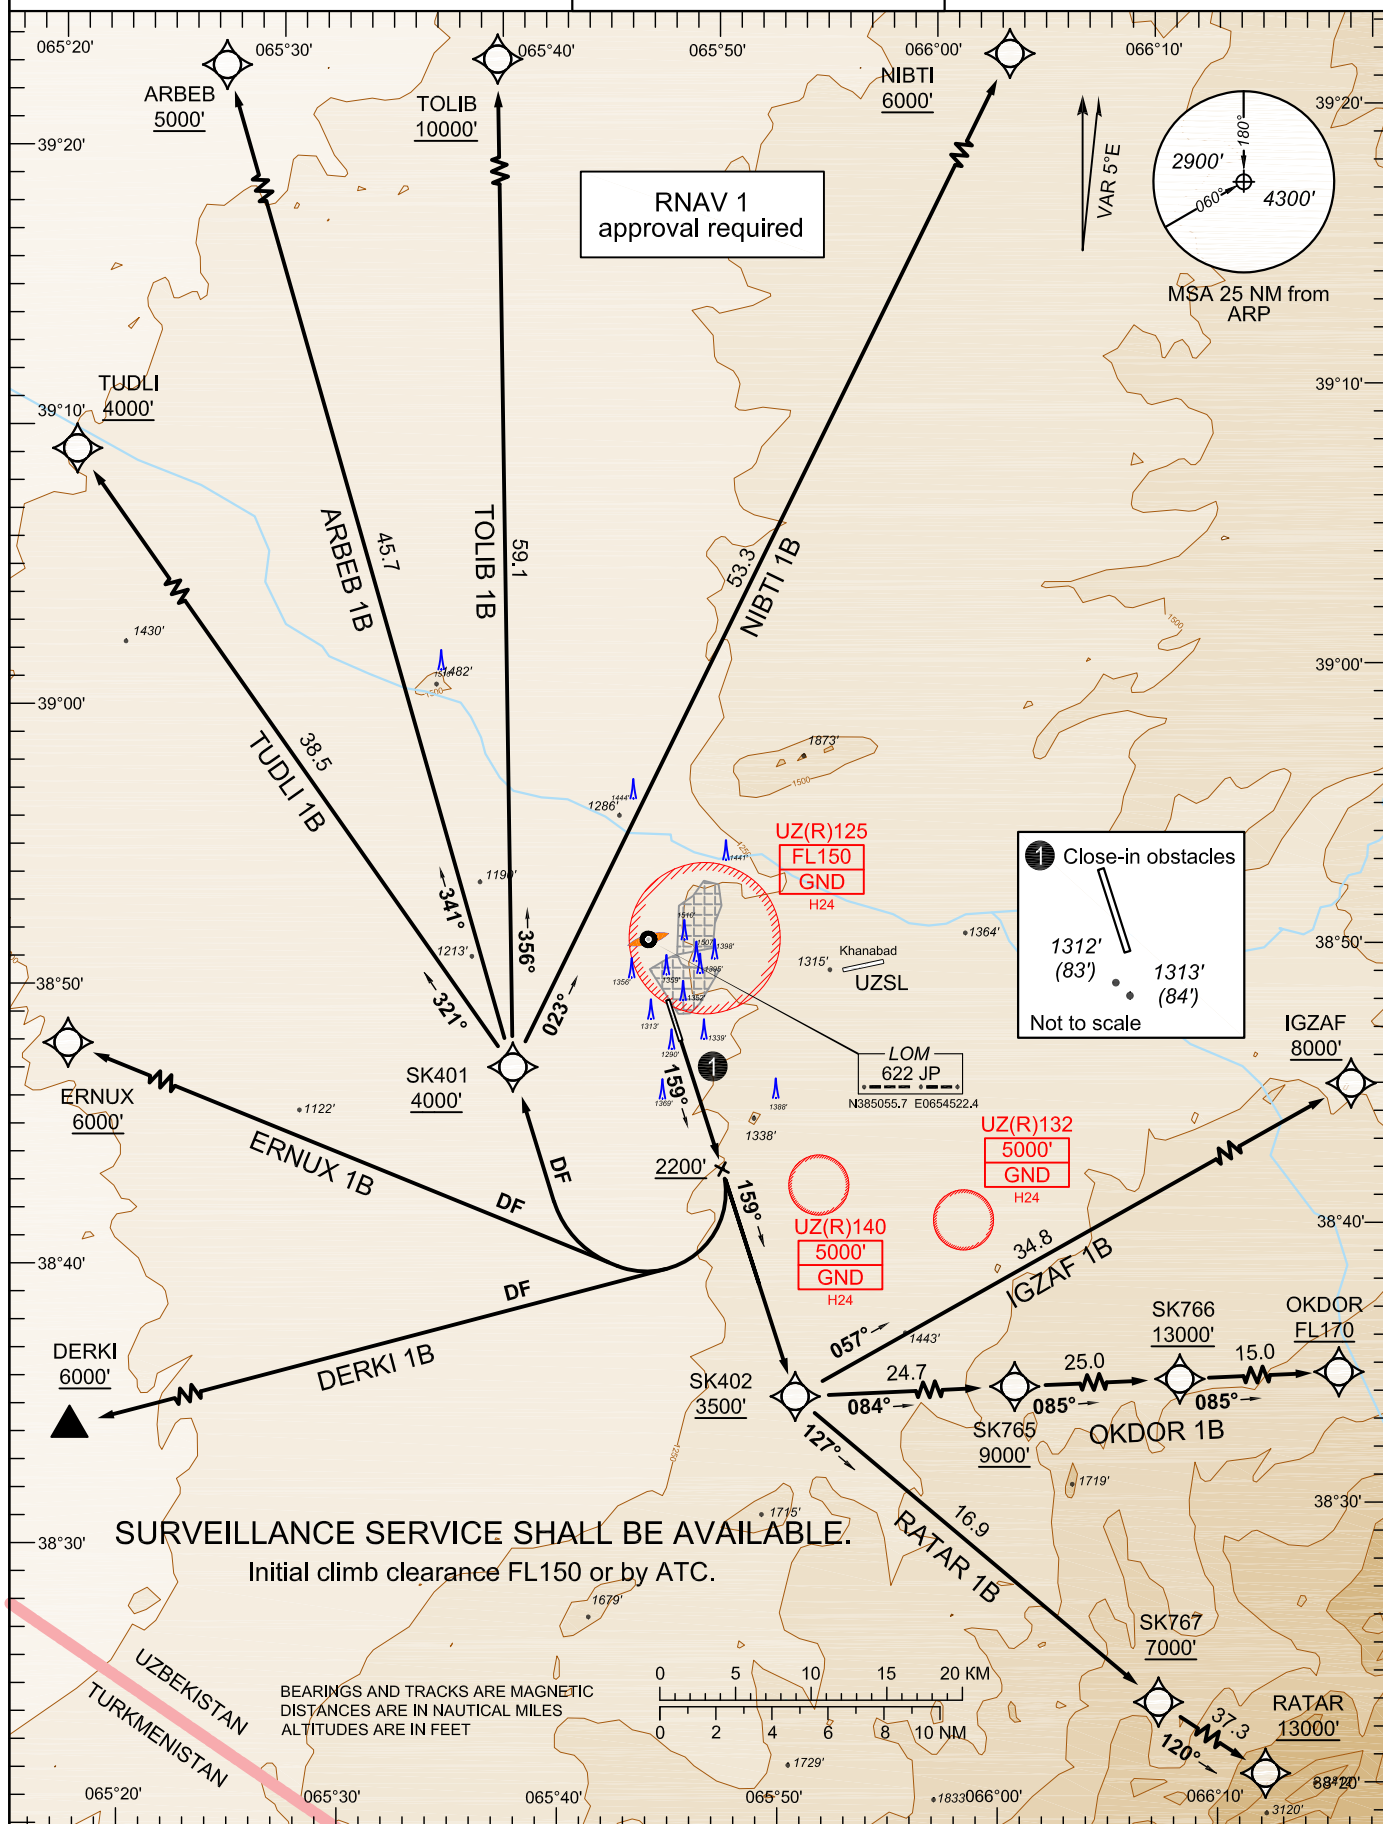

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY16

GENERAL:

Surveillance service shall be available.

Initial climb clearance FL150 or instructed by ATC.

Maximum speed below 10000': IAS 250 KT unless otherwise stated under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

ARBEB 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	159 (163.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	R	+A4000	-	RNAV 1	
TF	ARBEB	-	341 (345.8)	+5.2	45.7	R	+A5000	-	RNAV 1	

DERKI 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	159 (163.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	DERKI	-	-	+5.2	-	R	+A6000	-	RNAV 1	

ERNUX 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	159 (163.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	ERNUX	-	-	+5.2	-	R	+A6000	-	RNAV 1	

IGZAF 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK402	-	159 (163.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	IGZAF	-	057 (062.4)	+5.1	34.8	L	+A8000	-	RNAV 1	

NIBTI 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	159 (163.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	R	+A4000	-	RNAV 1	
TF	NIBTI	-	023 (027.8)	+5.2	53.3	R	+A6000	-	RNAV 1	

Continued on the next page

OKDOR 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK402	-	159 (163.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	SK765	-	084 (089.2)	+5.1	24.7	L	+A9000	-	RNAV 1	
TF	SK766	-	085 (089.5)	+5.0	25.0	-	+A13000	-	RNAV 1	
TF	OKDOR	-	085 (089.9)	+5.0	15.0	-	+FL170	-	RNAV 1	

RATAR 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK402	-	159 (163.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	SK767	-	127 (131.9)	+5.1	16.9	L	+A7000	-	RNAV 1	
TF	RATAR	-	120 (125.4)	+5.0	37.3	L	+A13000	-	RNAV 1	

TOLIB 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	159 (163.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	R	+A4000	-	RNAV 1	
TF	TOLIB	-	356 (000.8)	+5.2	59.1	R	+A10000	-	RNAV 1	

TUDLI 1B

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	159 (163.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	R	+A4000	-	RNAV 1	
TF	TUDLI	-	321 (326.6)	+5.2	38.5	L	+A4000	-	RNAV 1	