


KARSHI/UZSK
RNAV (GNSS) RWY34

ARBEB 1D, DERKI 1D, ERNUX 1D,
IGZAF 1D, NIBTI 1D, OKDOR 1D,
RATAR 1D, TOLIB 1D, TUDLI 1D.

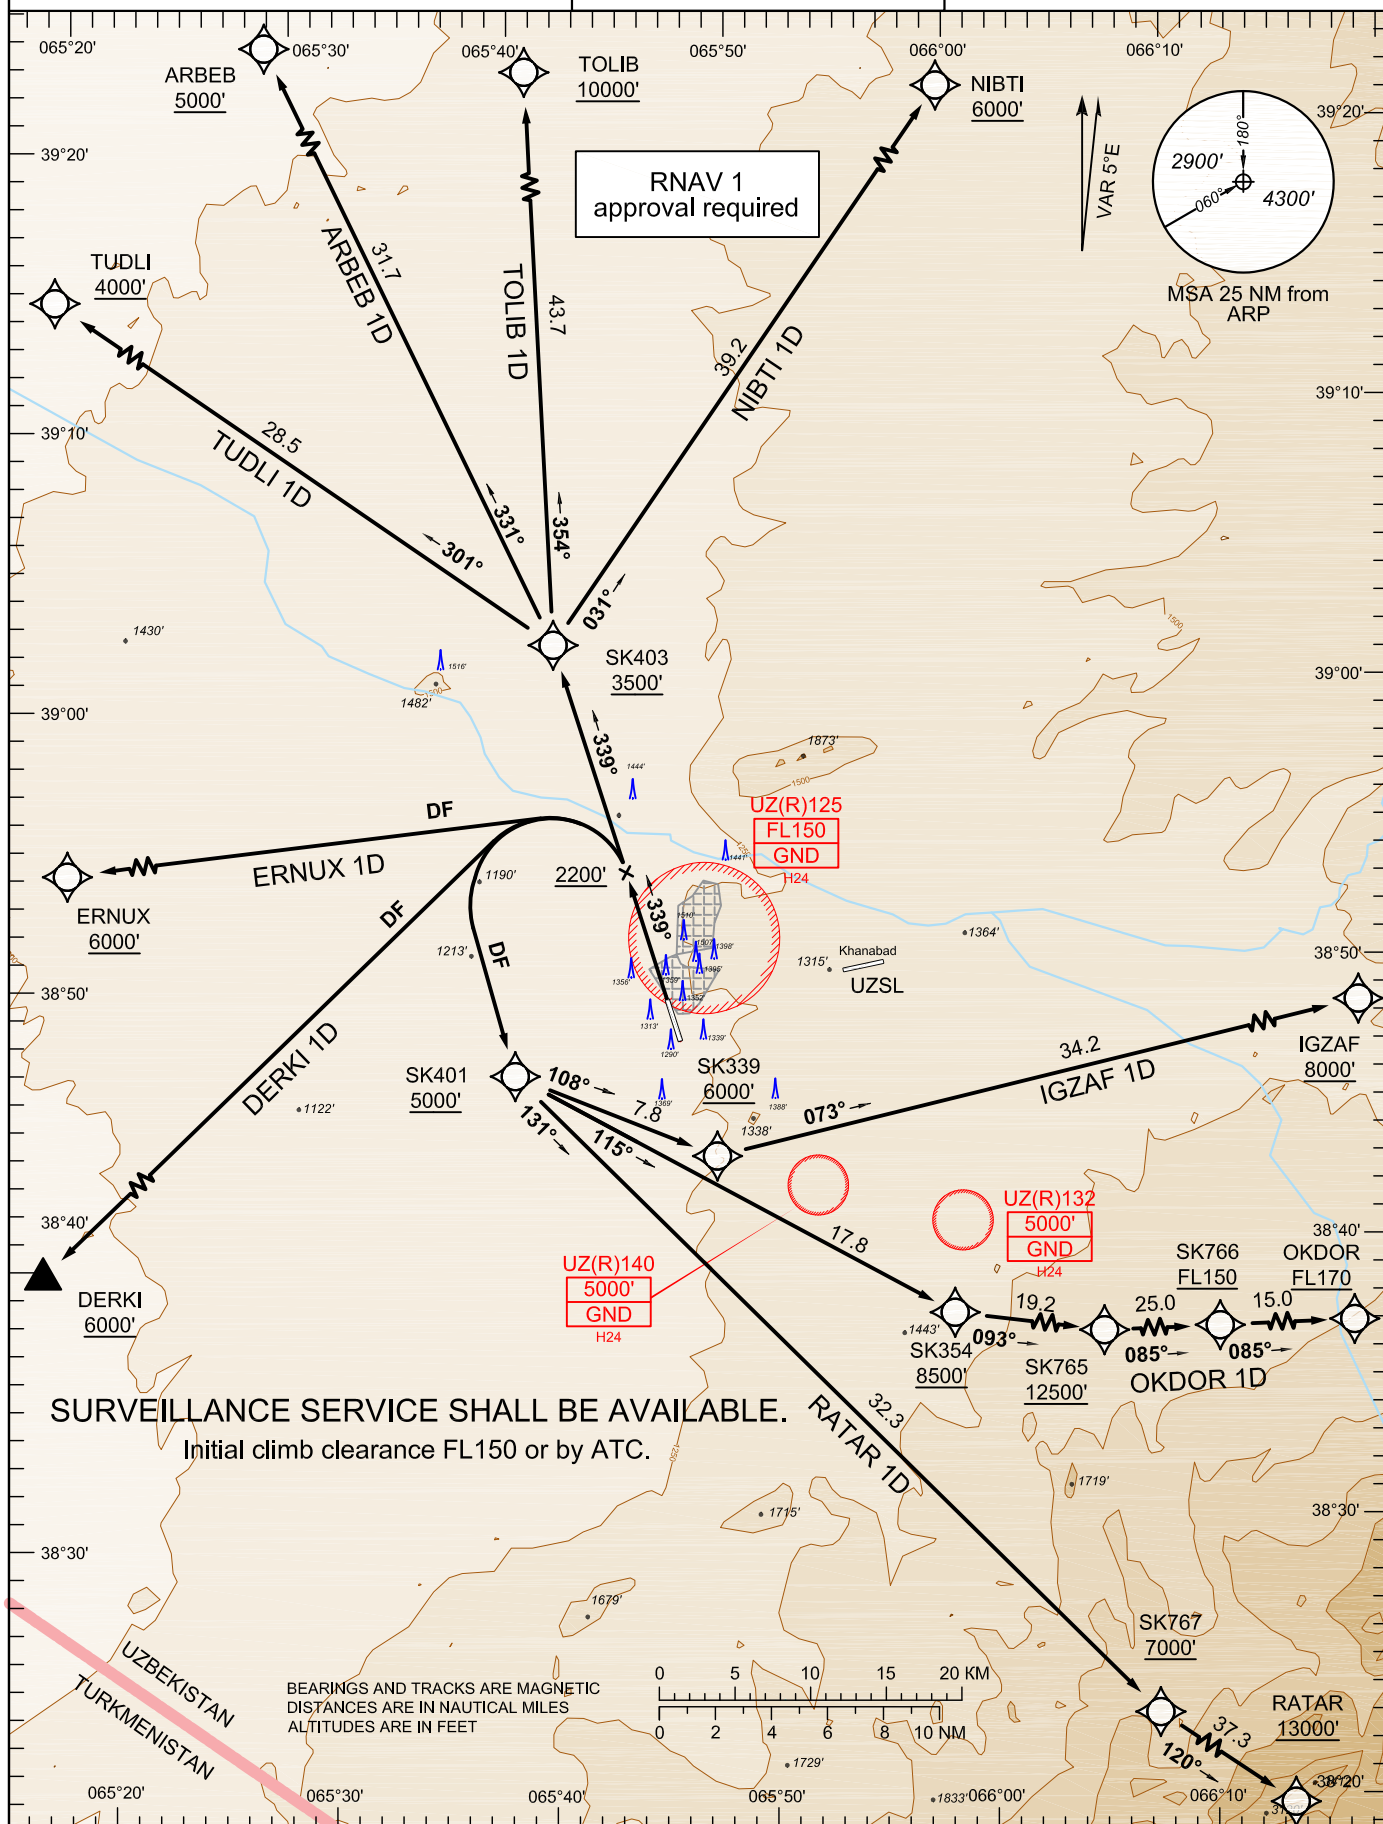

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENTAL - RWY34**GENERAL:**

Surveillance service shall be available.

Initial climb clearance FL150 or instructed by ATC.

Maximum speed below 10000': IAS 250 KT unless otherwise stated under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

ARBEB 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK403	-	339 (343.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	ARBEB	-	331 (335.8)	+5.2	31.7	L	+A5000	-	RNAV 1	

DERKI 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	339 (343.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	DERKI	-	-	+5.2	-	L	+A6000	-	RNAV 1	

ERNUX 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	339 (343.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	ERNUX	-	-	+5.2	-	L	+A6000	-	RNAV 1	

IGZAF 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	339 (343.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	L	+A5000	-	RNAV 1	
TF	SK339	-	108 (113.1)	+5.1	7.8	L	+A6000	-	RNAV 1	
TF	IGZAF	-	073 (077.9)	+5.1	34.2	L	+A8000	-	RNAV 1	

NIBTI 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK403	-	339 (343.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	NIBTI	-	031 (036.0)	+5.1	39.2	R	+A6000	-	RNAV 1	

Continued on the next page

OKDOR 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	339 (343.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	L	+A5000	-	RNAV 1	
TF	SK354	-	115 (119.8)	+5.1	17.8	L	+A8500	-	RNAV 1	
TF	SK765	-	093 (098.5)	+5.0	19.2	L	+A12500	-	RNAV 1	
TF	SK766	-	085 (089.5)	+5.0	25.0	L	+FL150	-	RNAV 1	
TF	OKDOR	-	085 (089.9)	+5.0	15.0	-	+FL170	-	RNAV 1	

RATAR 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CA	-	-	339 (343.9)	+5.1	-	-	+A2200	-	RNAV 1	
DF	SK401	-	-	+5.1	-	L	+A5000	-	RNAV 1	
TF	SK767	-	131 (136.2)	+5.1	32.3	L	+A7000	-	RNAV 1	
TF	RATAR	-	120 (125.4)	+5.0	37.3	L	+A13000	-	RNAV 1	

TOLIB 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK403	-	339 (343.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	TOLIB	-	354 (358.8)	+5.1	43.7	R	+A10000	-	RNAV 1	

TUDLI 1D

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	SK403	-	339 (343.9)	+5.1	-	-	+A3500	-	RNAV 1	
TF	TUDLI	-	301 (306.1)	+5.1	28.5	L	+A4000	-	RNAV 1	