

**STANDARD ARRIVAL CHART
INSTRUMENT (STAR) - ICAO**


AD ELEV 1232'
THR ELEV 1229'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

KARSHI TOWER
(reserve)

124.4
120.3

**KARSHI/UZSK
RNAV (GNSS) RWY16**

AKMAZ 1W, ARBEB 1W, DERKI 1W,
IGZAF 1W, NIBTI 1W, OKDOR 1W,
RATAR 1W, TOLIB 1W, TUDLI 1W,
VADNA 1W.

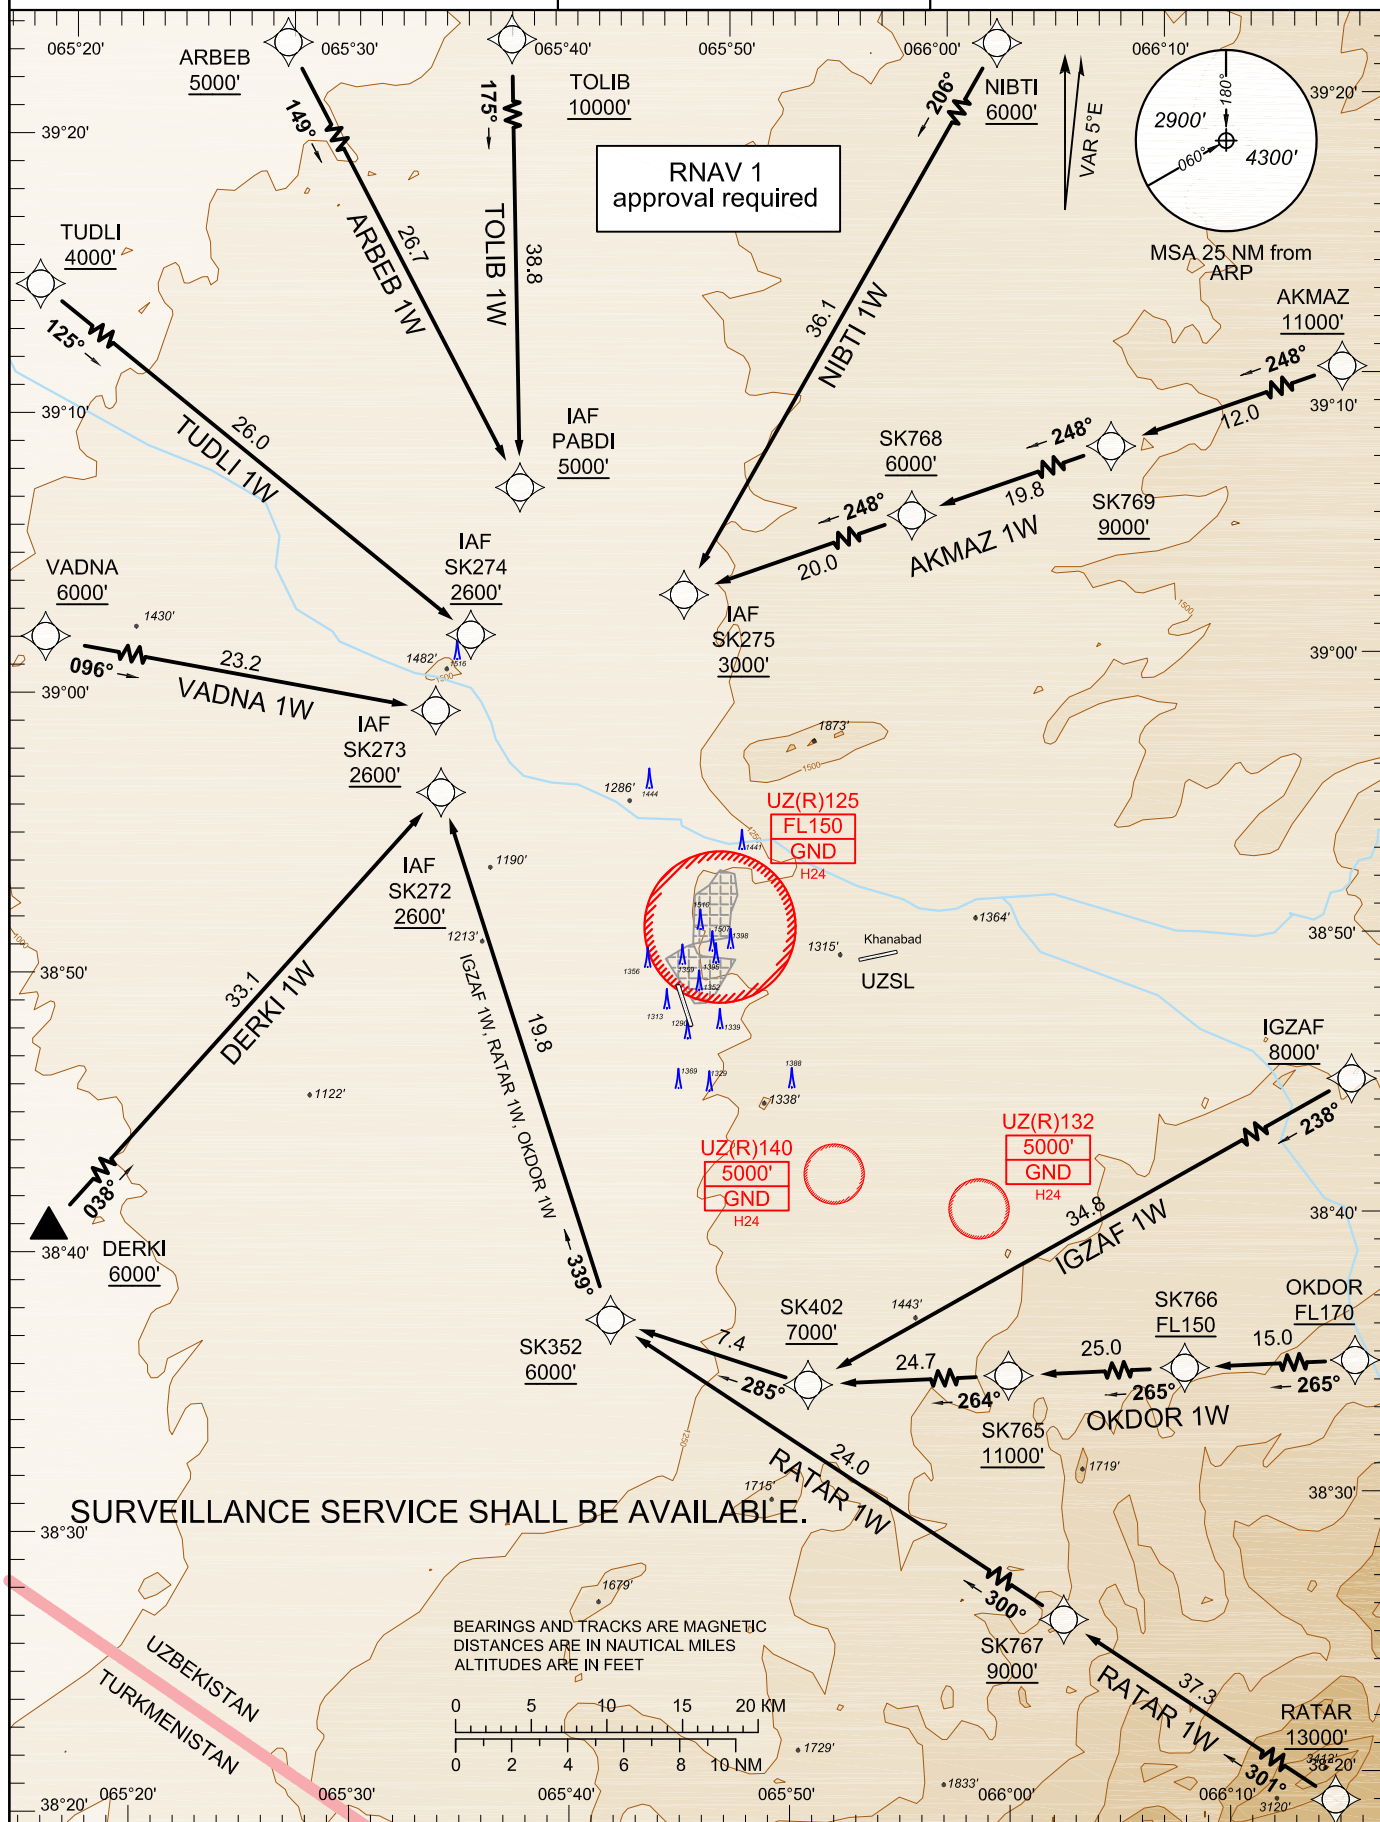

SURVEILLANCE SERVICE SHALL BE AVAILABLE.

RNAV STANDARD ARRIVAL PROCEDURE - RWY16**GENERAL:**

Surveillance service shall be available.
Maximum speed below 10000': IAS 250 KT unless otherwise stated
under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

AKMAZ 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	AKMAZ	-	-	+5.1	-	-	+A11000	-	RNAV 1	
TF	SK769	-	248 (253.2)	+5.1	12.0	-	+A9000	-	RNAV 1	
TF	SK768	-	248 (253.1)	+5.1	19.8	-	+A6000	-	RNAV 1	
TF	SK275	-	248 (252.8)	+5.0	20.0	-	+A3000	-	RNAV 1	

ARBEB 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ARBEB	-	-	+5.4	-	-	+A5000	-	RNAV 1	
TF	PABDI	-	149 (154.1)	+5.1	26.7	-	+A5000	-	RNAV 1	

DERKI 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DERKI	-	-	+5.1	-	-	+A6000	-	RNAV 1	
TF	SK272	-	038 (043.3)	+5.1	33.1	-	+A2600	-	RNAV 1	

IGZAF 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	IGZAF	-	-	+5.1	-	-	+A8000	-	RNAV 1	
TF	SK402	-	238 (242.8)	+5.1	34.8	-	+A7000	-	RNAV 1	
TF	SK352	-	285 (290.0)	+5.1	7.4	R	+A6000	-	RNAV 1	
TF	SK272	-	339 (343.9)	+5.1	19.8	R	+A2600	-	RNAV 1	

NIBTI 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	NIBTI	-	-	+5.1	-	-	+A6000	-	RNAV 1	
TF	SK275	-	206 (211.6)	+5.1	36.1	-	+A3000	-	RNAV 1	

Continued on the next page

OKDOR 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	OKDOR	-	-	+5.1	-	-	+FL170	-	RNAV 1	
TF	SK766	-	265 (270.1)	+5.1	15.0	-	+FL150	-	RNAV 1	
TF	SK765	-	265 (269.9)	+5.1	25.0	-	+A11000	-	RNAV 1	
TF	SK402	-	264 (269.5)	+5.1	24.7	-	+A7000	-	RNAV 1	
TF	SK352	-	285 (290.0)	+5.1	7.4	R	+A6000	-	RNAV 1	
TF	SK272	-	339 (343.9)	+5.1	19.8	R	+A2600	-	RNAV 1	

RATAR 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	RATAR	-	-	+5.1	-	-	+A13000	-	RNAV 1	
TF	SK767	-	301 (305.8)	+5.1	37.3	-	+A9000	-	RNAV 1	
TF	SK352	-	300 (305.4)	+5.1	24.0	-	+A6000	-	RNAV 1	
TF	SK272	-	339 (343.9)	+5.1	19.8	R	+A2600	-	RNAV 1	

TOLIB 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TOLIB	-	-	+5.5	-	-	+A10000	-	RNAV 1	
TF	PABDI	-	175 (180.1)	+5.1	38.8	-	+A5000	-	RNAV 1	

TUDLI 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TUDLI	-	-	+5.4	-	-	+A4000	-	RNAV 1	
TF	SK274	-	125 (130.1)	+5.1	26.0	-	+A2600	-	RNAV 1	

VADNA 1W

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	VADNA	-	-	+5.3	-	-	+A6000	-	RNAV 1	
TF	SK273	-	096 (101.8)	+5.1	23.2	-	+A2600	-	RNAV 1	