


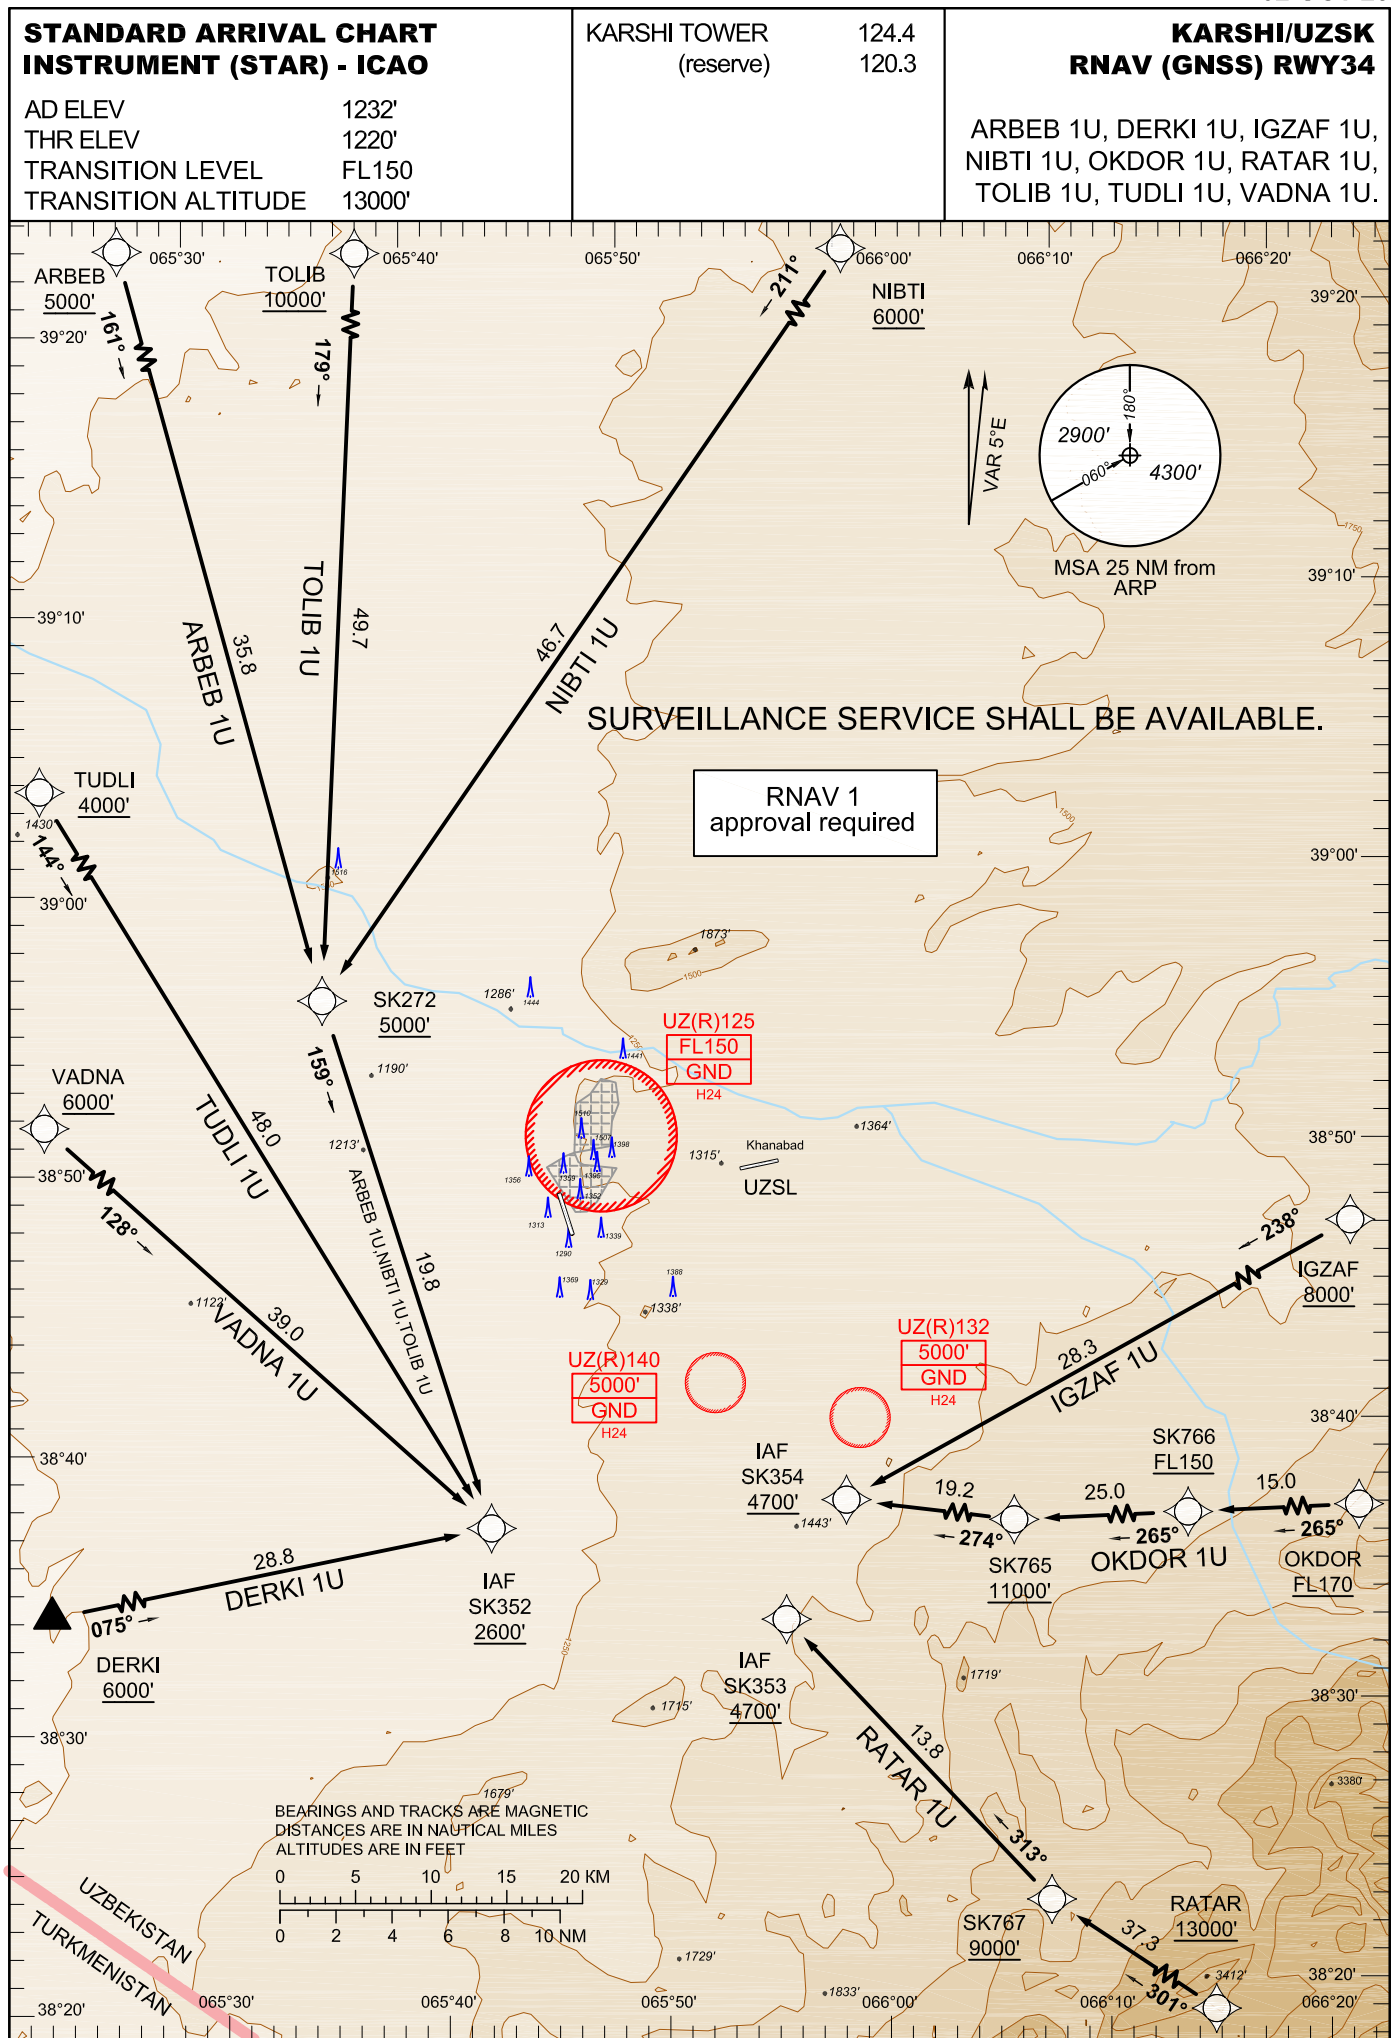

RNAV STANDARD ARRIVAL PROCEDURE - RWY34

GENERAL:

Surveillance service shall be available.
Maximum speed below 10000': IAS 250 KT unless otherwise stated
under Speed Limit, or instructed by ATC.

NOTE:

Flocks of birds in the vicinity of aerodrome.

ARBEB 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	ARBEB	-	-	+5.4	-	-	+A5000	-	RNAV 1	
TF	SK272	-	161 (166.2)	+5.1	35.8	-	+A5000	-	RNAV 1	
TF	SK352	-	159 (163.8)	+5.1	19.8	L	+A2600	-	RNAV 1	

DERKI 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	DERKI	-	-	+5.1	-	-	+A6000	-	RNAV 1	
TF	SK352	-	075 (079.7)	+5.1	28.8	-	+A2600	-	RNAV 1	

IGZAF 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	IGZAF	-	-	+5.1	-	-	+A8000	-	RNAV 1	
TF	SK354	-	238 (243.1)	+5.1	28.3	-	+A4700	-	RNAV 1	

NIBTI 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	NIBTI	-	-	+5.1	-	-	+A6000	-	RNAV 1	
TF	SK272	-	211 (216.6)	+5.1	46.7	-	+A5000	-	RNAV 1	
TF	SK352	-	159 (163.8)	+5.1	19.8	L	+A2600	-	RNAV 1	

OKDOR 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	OKDOR	-	-	+5.1	-	-	+FL170	-	RNAV 1	
TF	SK766	-	265 (270.1)	+5.1	15.0	-	+FL150	-	RNAV 1	
TF	SK765	-	265 (269.9)	+5.1	25.0	-	+A11000	-	RNAV 1	
TF	SK354	-	274 (278.8)	+5.1	19.2	R	+A4700	-	RNAV 1	

Continued on the next page

RATAR 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	RATAR	-	-	+5.1	-	-	+A13000	-	RNAV 1	
TF	SK767	-	301 (305.8)	+5.1	37.3	-	+A9000	-	RNAV 1	
TF	SK353	-	313 (318.5)	+5.1	13.8	R	+A4700	-	RNAV 1	

TOLIB 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TOLIB	-	-	+5.5	-	-	+A10000	-	RNAV 1	
TF	SK272	-	179 (184.2)	+5.1	49.7	-	+A5000	-	RNAV 1	
TF	SK352	-	159 (163.8)	+5.1	19.8	L	+A2600	-	RNAV 1	

TUDLI 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TUDLI	-	-	+5.4	-	-	+A4000	-	RNAV 1	
TF	SK352	-	144 (149.8)	+5.1	48.0	-	+A2600	-	RNAV 1	

VADNA 1U

Path Descriptor	WPT Identifier	Fly- over	Course/Track °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	VADNA	-	-	+5.3	-	-	+A6000	-	RNAV 1	
TF	SK352	-	128 (133.1)	+5.1	39.0	-	+A2600	-	RNAV 1	