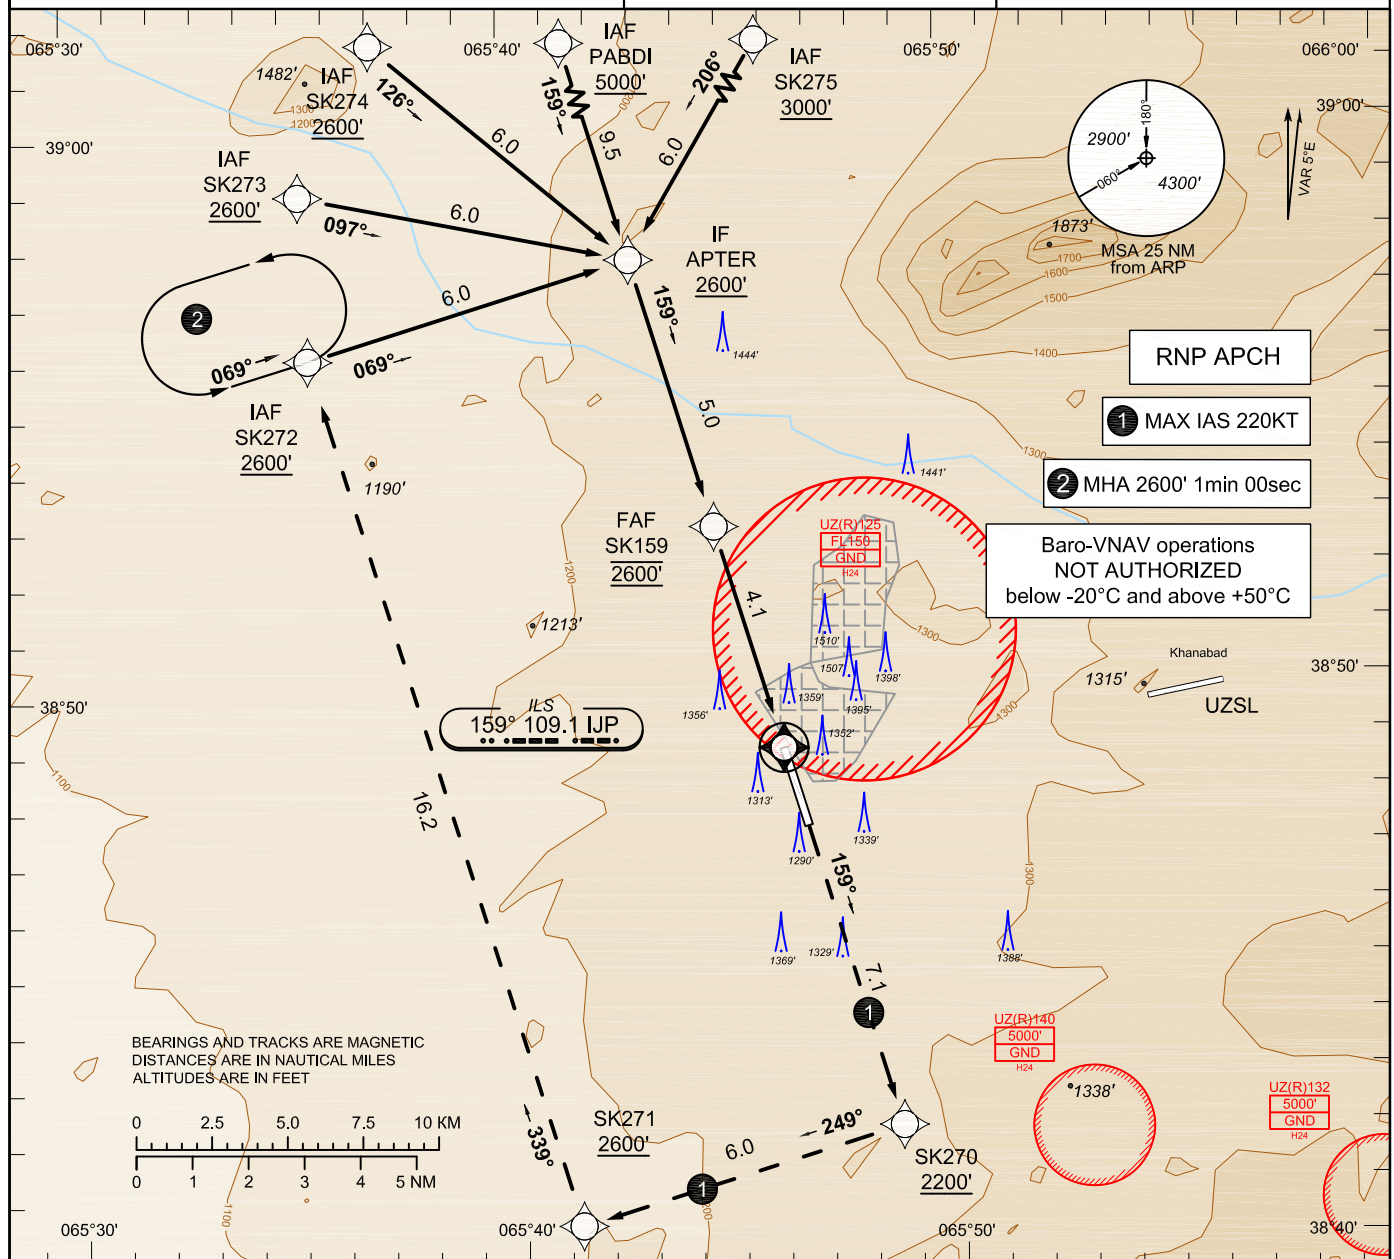


**INSTRUMENT APPROACH
CHART - ICAO**

AD ELEV 1232'
THR ELEV 1229'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'


KARSHI TOWER
(reserve)

124.4
120.3

KARSHI/UZSK**RNP RWY16**

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAF - THR 4.1NM DES Gradient 5.2%	min:s	3:33	3:45	2:29	2:04	1:46	1:33

DIST TO THR	NM	2.0	3.0	4.1
ALT	ft	1920	2239	2600
HEIGHT	m	211	308	418

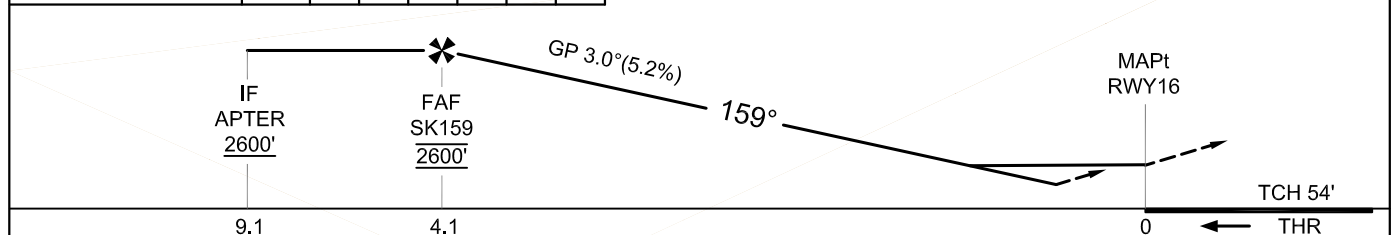

MISSED APPROACH: CLIMB on TR 159°. Passing SK270 at 2200' or above TURN RIGHT (MAX IAS 220KT) to SK271 climbing 2600' or above TURN RIGHT proceed to SK272. HOLD over SK272 or follow ATC instructions.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	LNAV/VNAV	1583'(354')			
	LNAV	1650'(418')			
CIRCLING		2060'(820')			

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZSK AD2.24-6.X.

INSTRUMENT APPROACH ROUTES - RNP APCH (GNSS) - RWY16

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK272	-	-	+5.2	-	-	+A2600	-	-	RNAV 1
TF	APTER	-	069 (073.8)	+5.2	6.0	-	+A2600	-	-	RNAV 1
TF	SK159	-	159 (164.0)	+5.2	5.0	R	@A2600	-	-	RNAV 1
TF	RWY16	Y	159 (164.0)	+5.2	4.1	-	-	-	-3.0/54	RNP APCH
TF	SK270	-	159 (164.0)	+5.2	7.1	-	+A2200	-220	-	RNAV 1
TF	SK271	-	249 (254.0)	+5.2	6.0	R	+A2600	-220	-	RNAV 1
TF	SK272	-	339 (343.9)	+5.2	16.2	R	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK273	-	-	+5.2	-	-	+A2600	-	-	RNAV 1
TF	APTER	-	097 (102.1)	+5.2	6.0	-	+A2600	-	-	RNAV 1
TF	SK159	-	159 (164.0)	+5.2	5.0	R	@A2600	-	-	RNAV 1
TF	RWY16	Y	159 (164.0)	+5.2	4.1	-	-	-	-3.0/54	RNP APCH
TF	SK270	-	159 (164.0)	+5.2	7.1	-	+A2200	-220	-	RNAV 1
TF	SK271	-	249 (254.0)	+5.2	6.0	R	+A2600	-220	-	RNAV 1
TF	SK272	-	339 (343.9)	+5.2	16.2	R	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK274	-	-	+5.2	-	-	+A2600	-	-	RNAV 1
TF	APTER	-	126 (130.9)	+5.2	6.0	-	+A2600	-	-	RNAV 1
TF	SK159	-	159 (164.0)	+5.2	5.0	R	@A2600	-	-	RNAV 1
TF	RWY16	Y	159 (164.0)	+5.2	4.1	-	-	-	-3.0/54	RNP APCH
TF	SK270	-	159 (164.0)	+5.2	7.1	-	+A2200	-220	-	RNAV 1
TF	SK271	-	249 (254.0)	+5.2	6.0	R	+A2600	-220	-	RNAV 1
TF	SK272	-	339 (343.9)	+5.2	16.2	R	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	PABDI	-	-	+5.2	-	-	+A5000	-	-	RNAV 1
TF	APTER	-	159 (163.9)	+5.2	9.5	-	+A2600	-	-	RNAV 1
TF	SK159	-	159 (164.0)	+5.2	5.0	-	@A2600	-	-	RNAV 1
TF	RWY16	Y	159 (164.0)	+5.2	4.1	-	-	-	-3.0/54	RNP APCH
TF	SK270	-	159 (164.0)	+5.2	7.1	-	+A2200	-220	-	RNAV 1
TF	SK271	-	249 (254.0)	+5.2	6.0	R	+A2600	-220	-	RNAV 1
TF	SK272	-	339 (343.9)	+5.2	16.2	R	+A2600	-	-	RNAV 1

Continued on the next page

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK275	-	-	+5.2	-	-	+A3000	-	-	RNAV 1
TF	APTER	-	206 (211.3)	+5.2	6.0	-	+A2600	-	-	RNAV 1
TF	SK159	-	159 (164.0)	+5.2	5.0	L	@A2600	-	-	RNAV 1
TF	RWY16	Y	159 (164.0)	+5.2	4.1	-	-	-	-3.0/54	RNP APCH
TF	SK270	-	159 (164.0)	+5.2	7.1	-	+A2200	-220	-	RNAV 1
TF	SK271	-	249 (254.0)	+5.2	6.0	R	+A2600	-220	-	RNAV 1
TF	SK272	-	339 (343.9)	+5.2	16.2	R	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	SK271	069 (073.8)	L	A2600	A13000	-230	+5.2	RNAV 1	1min 00sec