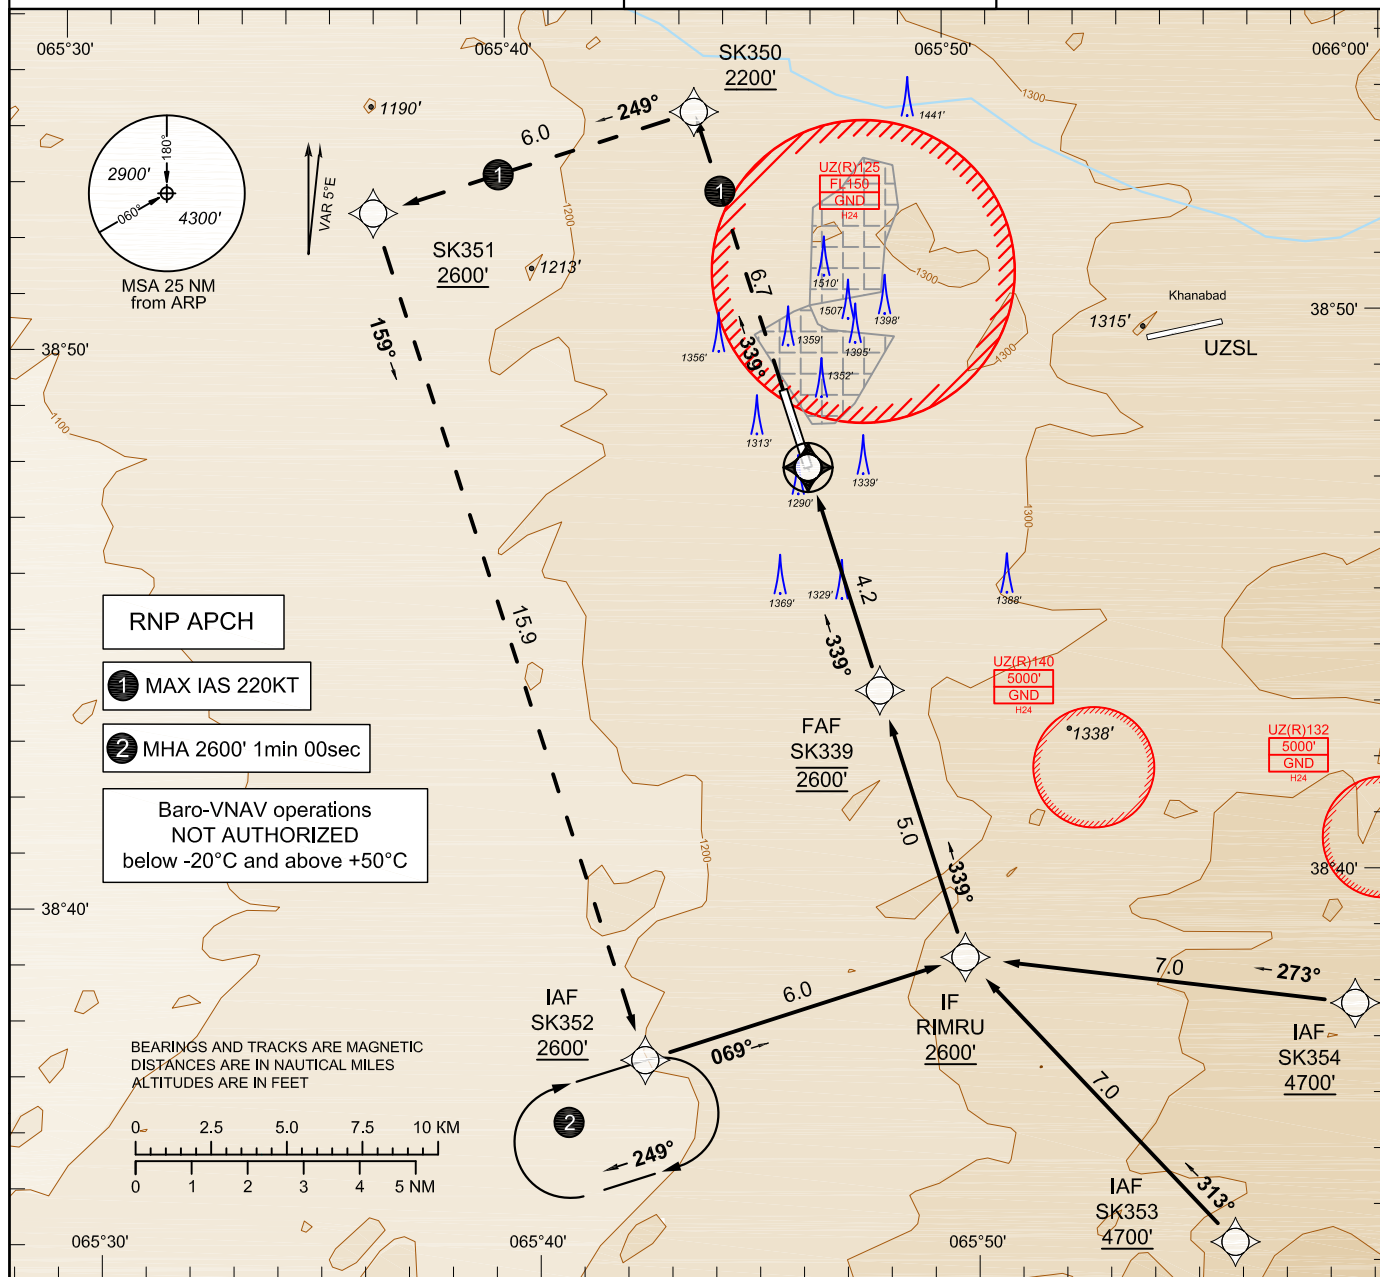
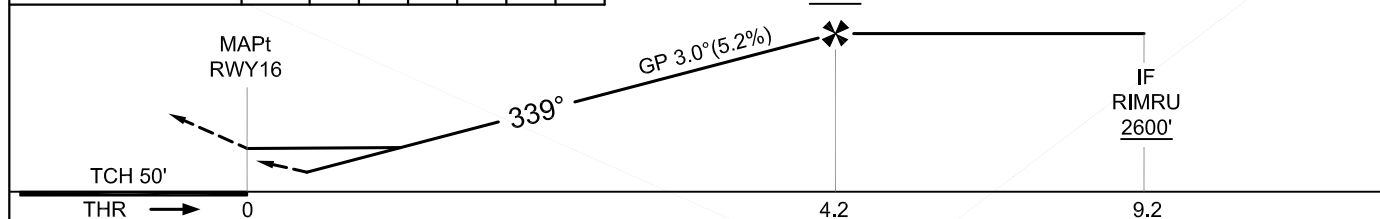


**INSTRUMENT APPROACH
CHART - ICAO**AD ELEV 1232'
THR ELEV 1220'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'KARSHI TOWER
(reserve)124.4
120.3**KARSHI/UZSK****RNP RWY34**

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAF - THR 4.2NM DES Gradient 5.2%	min:s	3:35	3:47	2:30	2:05	1:47	1:34

FAF
SK339
2600'

DIST TO THR	NM	2.0	3.0	4.2
ALT	ft	1907	2225	2600
HEIGHT	m	210	307	418

**MISSED APPROACH:** CLIMB on TR 339°. Passing SK350 at 2200' or above TURN LEFT (MAX IAS 220KT) to SK351 climbing 2600' or above TURN LEFT proceed to SK352. HOLD over SK352 or follow ATC instructions.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	LNAV/VNAV	1520'(300')			
	LNAV	1620'(391')			
CIRCLING		2060'(820')			

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZSK AD2.24-6.X.1.

INSTRUMENT APPROACH ROUTES - RNP APCH (GNSS) - RWY34

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK352	-	-	+5.2	-	-	+A2600	-	-	RNAV 1
TF	RIMRU	-	069 (073.8)	+5.2	6.0	-	+A2600	-	-	RNAV 1
TF	SK339	-	339 (344.0)	+5.2	5.0	L	@A2600	-	-	RNAV 1
TF	RWY34	Y	339 (343.9)	+5.2	4.2	-	-	-	-3.0/50	RNP APCH
TF	SK350	-	339 (343.9)	+5.2	6.7	-	+A2200	-220	-	RNAV 1
TF	SK351	-	249 (254.1)	+5.2	6.0	L	+A2600	-220	-	RNAV 1
TF	SK352	-	159 (163.8)	+5.2	15.9	L	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK353	-	-	+5.2	-	-	+A4700	-	-	RNAV 1
TF	RIMRU	-	313 (318.3)	+5.2	7.0	-	+A2600	-	-	RNAV 1
TF	SK339	-	339 (344.0)	+5.2	5.0	R	@A2600	-	-	RNAV 1
TF	RWY34	Y	339 (343.9)	+5.2	4.2	-	-	-	-3.0/50	RNP APCH
TF	SK350	-	339 (343.9)	+5.2	6.7	-	+A2200	-220	-	RNAV 1
TF	SK351	-	249 (254.1)	+5.2	6.0	L	+A2600	-220	-	RNAV 1
TF	SK352	-	159 (163.8)	+5.2	15.9	L	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	SK354	-	-	+5.2	-	-	+A4700	-	-	RNAV 1
TF	RIMRU	-	273 (278.5)	+5.2	7.0	-	+A2600	-	-	RNAV 1
TF	SK339	-	339 (344.0)	+5.2	5.0	R	@A2600	-	-	RNAV 1
TF	RWY34	Y	339 (343.9)	+5.2	4.2	-	-	-	-3.0/50	RNP APCH
TF	SK350	-	339 (343.9)	+5.2	6.7	-	+A2200	-220	-	RNAV 1
TF	SK351	-	249 (254.1)	+5.2	6.0	L	+A2600	-220	-	RNAV 1
TF	SK352	-	159 (163.8)	+5.2	15.9	L	+A2600	-	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	SK352	069 (073.8)	R	A2600	A13000	-230	+5.2	RNAV 1	1min 00sec