


**STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO**

AD ELEV 1583'
THR ELEV 08 1538'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

TASHKENT APPROACH 119.4
122.9
TASHKENT TOWER 120.4
EAST TOWER 134.0

**TASHKENT/UZTP
VOSTOCHNY
RNAV(GNSS) RWY08**

BAMUT 2B, MIKNO 2B, ODORI 2B,
DIBAD 2B, KUFIM 2B.

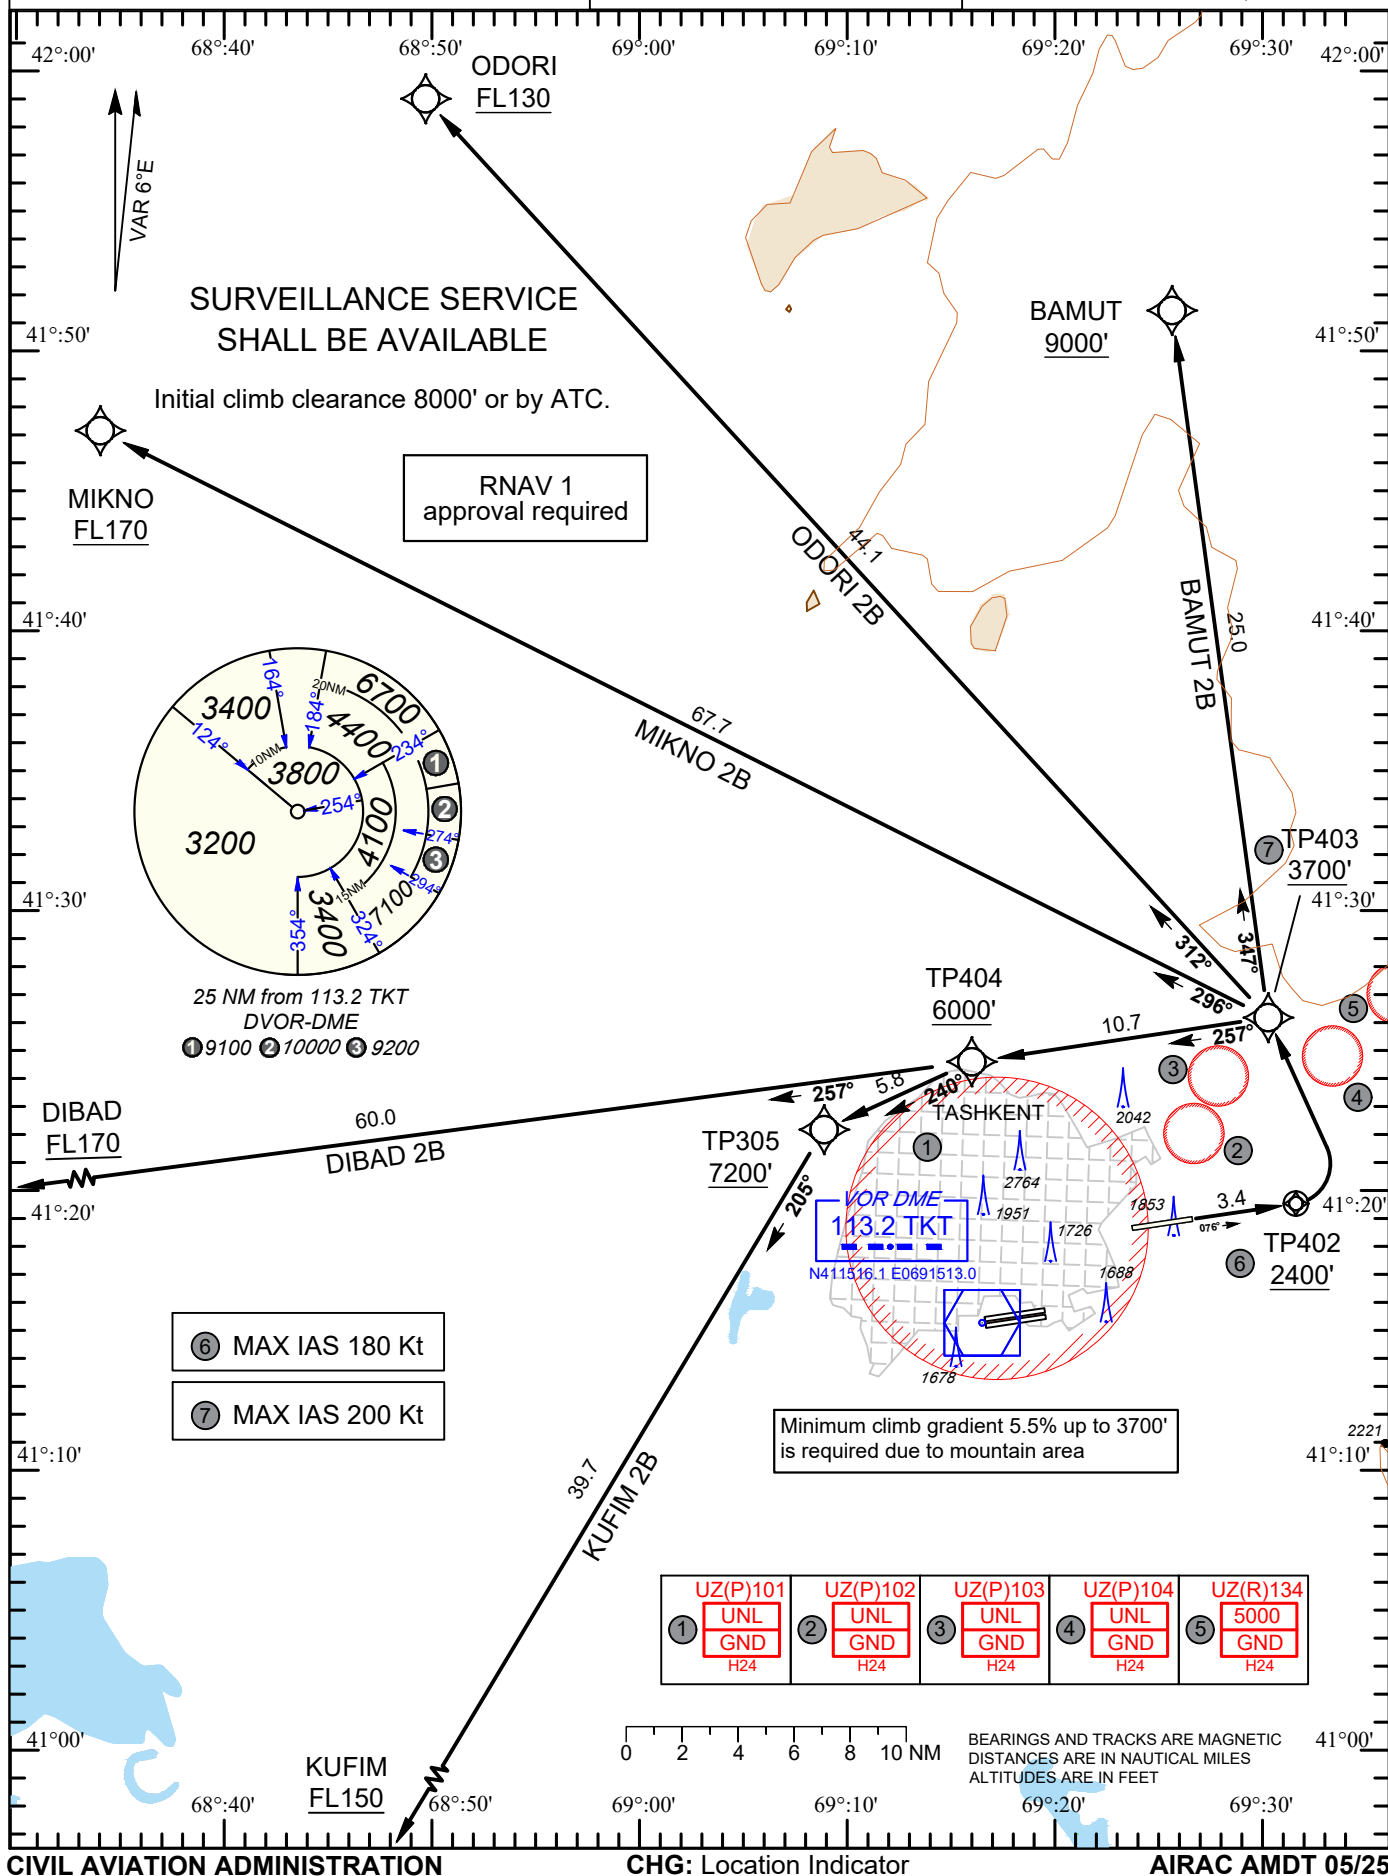

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY08

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY 08

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TP402	-	076 (081.8)	+5.7	3.4	-	+A2400	-180	RNAV 1	
DF	TP403	-	-	+5.7	-	L	+A3700	-200	RNAV 1	

Minimum climb gradient 5.5% up to 3700' is required due to mountain area

DIBAD 2B

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TP403	-	-	+5.7	-	-	+A3700'	-	RNAV1	
TF	TP404	-	257 (262.6)	+5.7	10.7	-	+A6000'	-	RNAV1	
TF	DIBAD	-	257 (262.7)	+5.7	60.0	-	+FL170	-	RNAV1	

BAMUT 2B

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TP403	-	-	+5.7	-	-	+A3700	-	RNAV1	
TF	BAMUT	-	347 (352.7)	+5.7	25.0	-	+A9000	-	RNAV1	

KUFIM 2B

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TP403	-	-	+5.7	-	-	+A3700'	-	RNAV1	
TF	TP404	-	257 (262.6)	+5.7	10.7	-	+A6000'	-	RNAV1	
TF	TP305	-	240 (245.3)	+5.7	5.8	L	+A7200'	-	RNAV1	
TF	KUFIM	-	205 (211.0)	+5.7	39.7	L	+FL150	-	RNAV1	

ODORI 2B

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TP403	-	-	+5.7	-	-	+A3700'	-	RNAV1	
TF	ODORI	-	312 (317.6)	+5.7	44.1	-	+FL130	-	RNAV1	

MIKNO 2B

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	TP403	-	-	+5.7	-	-	+A3700'	-	RNAV1	
TF	MIKNO	-	296 (302.0)	+5.7	67.7	-	+FL170	-	RNAV1	