


**RNAV (GNSS) STANDARD DEPARTURE  
CHART INSTRUMENT (SID) - ICAO**

AD ELEV 1583'  
THR ELEV 08L/08R 1538'  
TRANSITION LEVEL FL150  
TRANSITION ALTITUDE 13000'

TASHKENT APPROACH 119.4  
122.9  
TASHKENT TOWER 120.4  
EAST TOWER 134.0

**TASHKENT/UZTP  
VOSTOCHNY  
RNAV(GNSS) RWY08**

TISIB 2E, TISIB 2F.

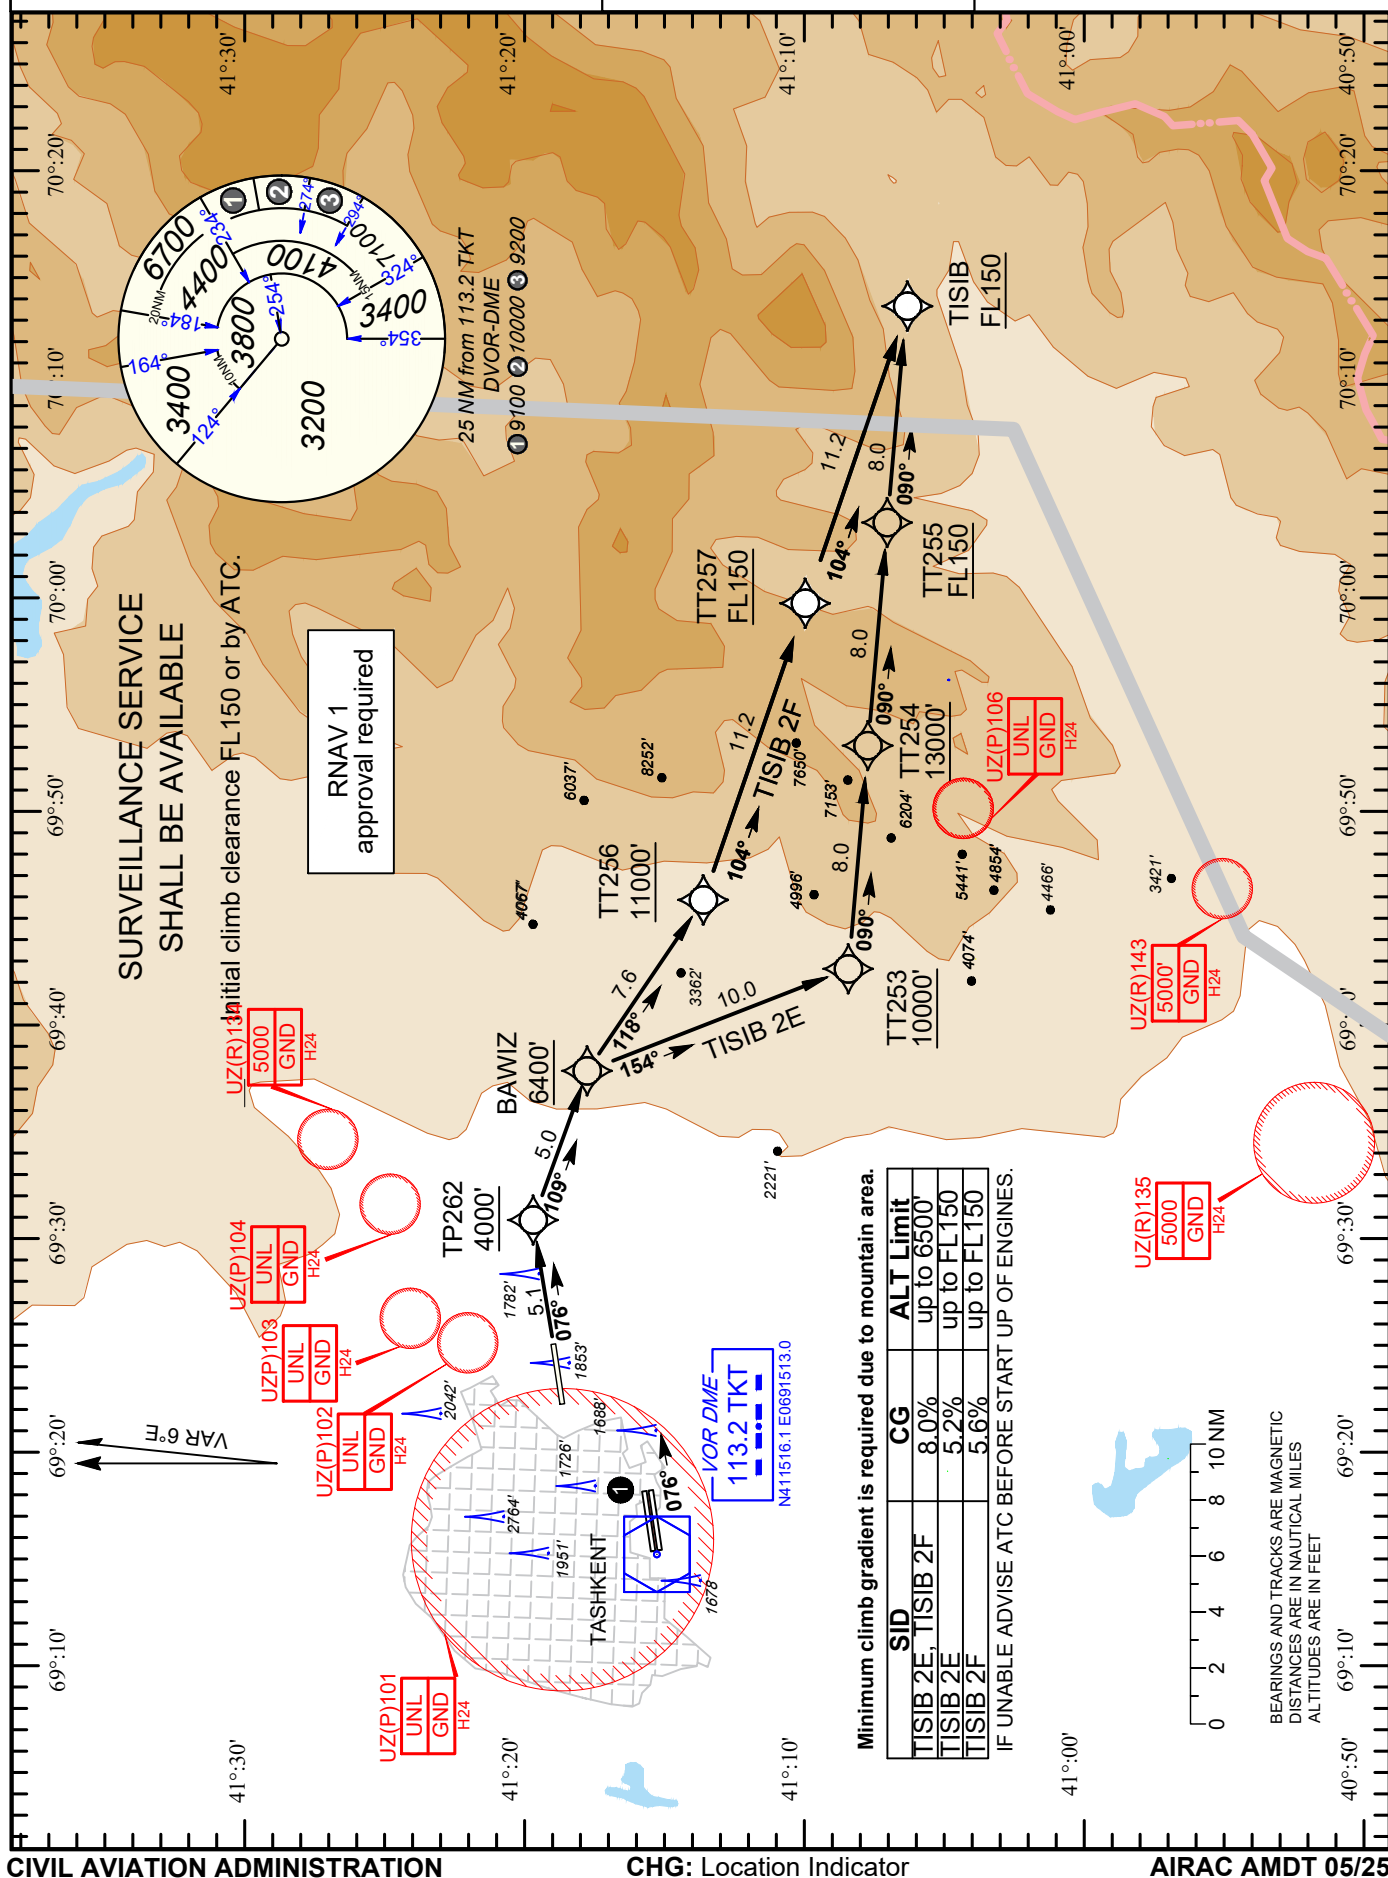

## STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY08

GENERAL: Surveillance service shall be available.  
Initial climb clearance FL150 or by ATC.  
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

## INITIAL CLIMB RWY 08

| Path Descriptor | WPT Identifier | Fly- over | Course/Track, ° M (T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|-----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| CF              | TP262          | -         | 076 (081.8)           | +5.7               | 5.1           | -              | +A4000        | -                | RNAV 1                   |         |
| TF              | BAWIZ          | -         | 109 (114.2)           | +5.7               | 5.0           | R              | +A6400        | -                | RNAV 1                   |         |

NOTE: Minimum climb gradient 8.0% up to 6500' is required due to mountain area.

## TISIB 2E

| Path Descriptor | WPT Identifier | Fly- over | Course/Track, ° M (T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|-----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | BAWIZ          | -         | -                     | +5.7               | -             | -              | +A6400        | -                | RNAV1                    |         |
| TF              | TT253          | -         | 154(159.1)            | +5.7               | 10.0          | R              | +A10000       | -                | RNAV1                    |         |
| TF              | TT254          | -         | 090(095.4)            | +5.7               | 8.0           | L              | +A13000       | -                | RNAV1                    |         |
| TF              | TT255          | -         | 090(095.6)            | +5.7               | 8.0           | -              | +FL150        | -                | RNAV1                    |         |
| TF              | TISIB          | -         | 090(095.7)            | +5.7               | 8.0           | -              | +FL150        | -                | RNAV1                    | -       |

NOTE: Minimum climb gradient 5.2% up to FL150 is required due to mountain area.

## TISIB 2F

| Path Descriptor | WPT Identifier | Fly- over | Course/Track, ° M (T) | Magnetic variation | Distance (NM) | Turn direction | Altitude (FT) | Speed limit (KT) | Navigation specification | Remarks |
|-----------------|----------------|-----------|-----------------------|--------------------|---------------|----------------|---------------|------------------|--------------------------|---------|
| IF              | BAWIZ          | -         | -                     | +5.7               | -             | -              | +A6400        | -                | RNAV1                    |         |
| TF              | TT256          | -         | 118 (123.4)           | +5.7               | 7.6           | R              | +A11000       | -                | RNAV1                    |         |
| TF              | TT257          | -         | 104 (109.5)           | +5.7               | 11.2          | L              | +FL150        | -                | RNAV1                    |         |
| TF              | TISIB          | -         | 104 (109.7)           | +5.7               | 11.2          | -              | +FL150        | -                | RNAV1                    |         |

NOTE: Minimum climb gradient 5.6% up to FL150 is required due to mountain area.