


STANDARD DEPARTURE CHART INSTRUMENT (SID) - ICAO

AD ELEV 1417'
THR ELEV 26R/26L 1414'/1412'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ATIS 126.8
TASHKENT APPROACH 119.4
TASHKENT TOWER 122.9
VOLMET 120.4
113.2

TASHKENT/UZTT ISLAM KARIMOV RNAV(GNSS) RWY26R/26L

BAMUT 2C,
MIKNO 2C, ODORI 2C.

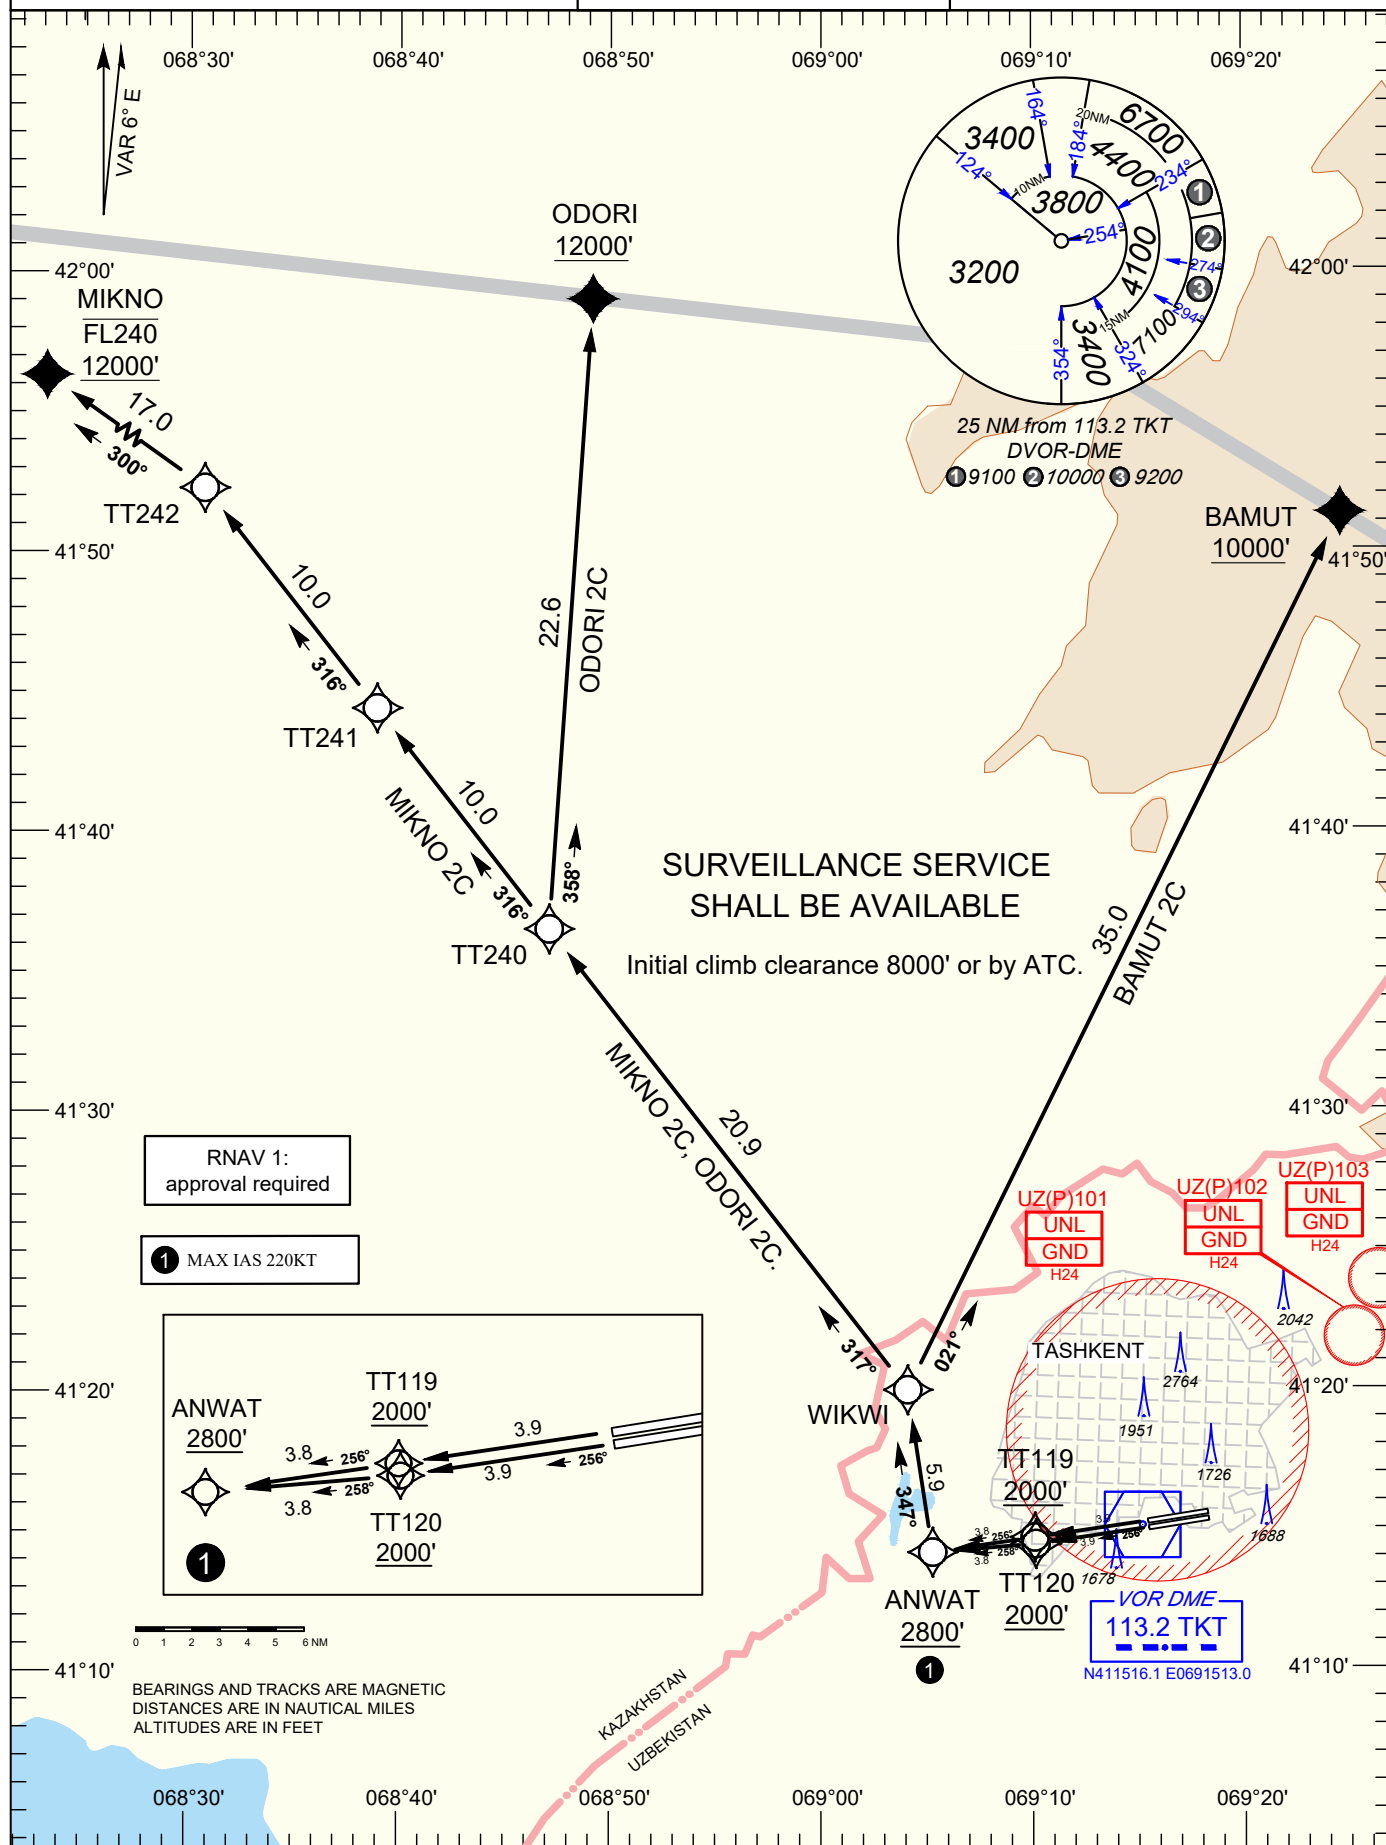

STANDARD INSTRUMENT DEPARTURE ROUTES - RNAV (GNSS) RWY 26

GENERAL: Surveillance service shall be available.
Initial climb clearance 8000' or by ATC.
Maximum IAS below 10000' - 250 KT or by ATC.

NOTE: Flocks of birds in the vicinity of aerodrome.

INITIAL CLIMB RWY26R

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT119	-	256 (261.7)	+5.6	3.9	-	+A2000	-220	RNAV 1	
TF	ANWAT	-	256 (261.7)	+5.6	3.8	-	+A2800	-220	RNAV 1	
TF	WIKWI	-	347 (352.1)	+5.5	5.9	R	-	-	RNAV 1	

INITIAL CLIMB RWY26L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
CF	TT120	-	256 (261.7)	+5.6	3.9	-	+A2000	-220	RNAV 1	
TF	ANWAT	-	258 (263.4)	+5.6	3.8	-	+A2800	-220	RNAV 1	
TF	WIKWI	-	347 (352.1)	+5.5	5.9	R	-	-	RNAV 1	

BAMUT 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	WIKWI	-	-	+5.5	-	R	-	-	RNAV 1	
TF	BAMUT	-	021 (026.2)	+5.6	35.0	R	+A10000	-	RNAV 1	

MIKNO 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	WIKWI	-	-	+5.5	-	-	-	-	RNAV 1	
TF	TT240	-	317 (322.2)	+5.6	20.9	L	-	-	RNAV 1	
TF	TT241	-	316 (322.0)	+5.7	10.0	-	-	-	RNAV 1	
TF	TT242	-	316 (321.9)	+5.8	10.0	-	-	-	RNAV 1	
TF	MIKNO	-	300 (305.3)	+5.9	17.0	L	+A12000 -FL240	-	RNAV 1	

ODORI 2C

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	WIKWI	-	-	+5.5	-	-	-	-	RNAV 1	
TF	TT240	-	317 (322.2)	+5.6	20.9	L	-	-	RNAV 1	
TF	ODORI	-	358 (003.9)	+5.6	22.6	R	+A12000	-	RNAV 1	