


**INSTRUMENT APPROACH  
CHART - ICAO**

AD ELEV 1583  
THR ELEV RWY26 1583  
TRANSITION LEVEL FL150  
TRANSITION ALTITUDE 13000

TASHKENT TOWER 120.4  
EAST TOWER 134.0  
EAST GROUND 135.0

**TASHKENT/UZTP  
VOSTOCHNY**

ILS M CAT II & III OR LOC M  
RWY26

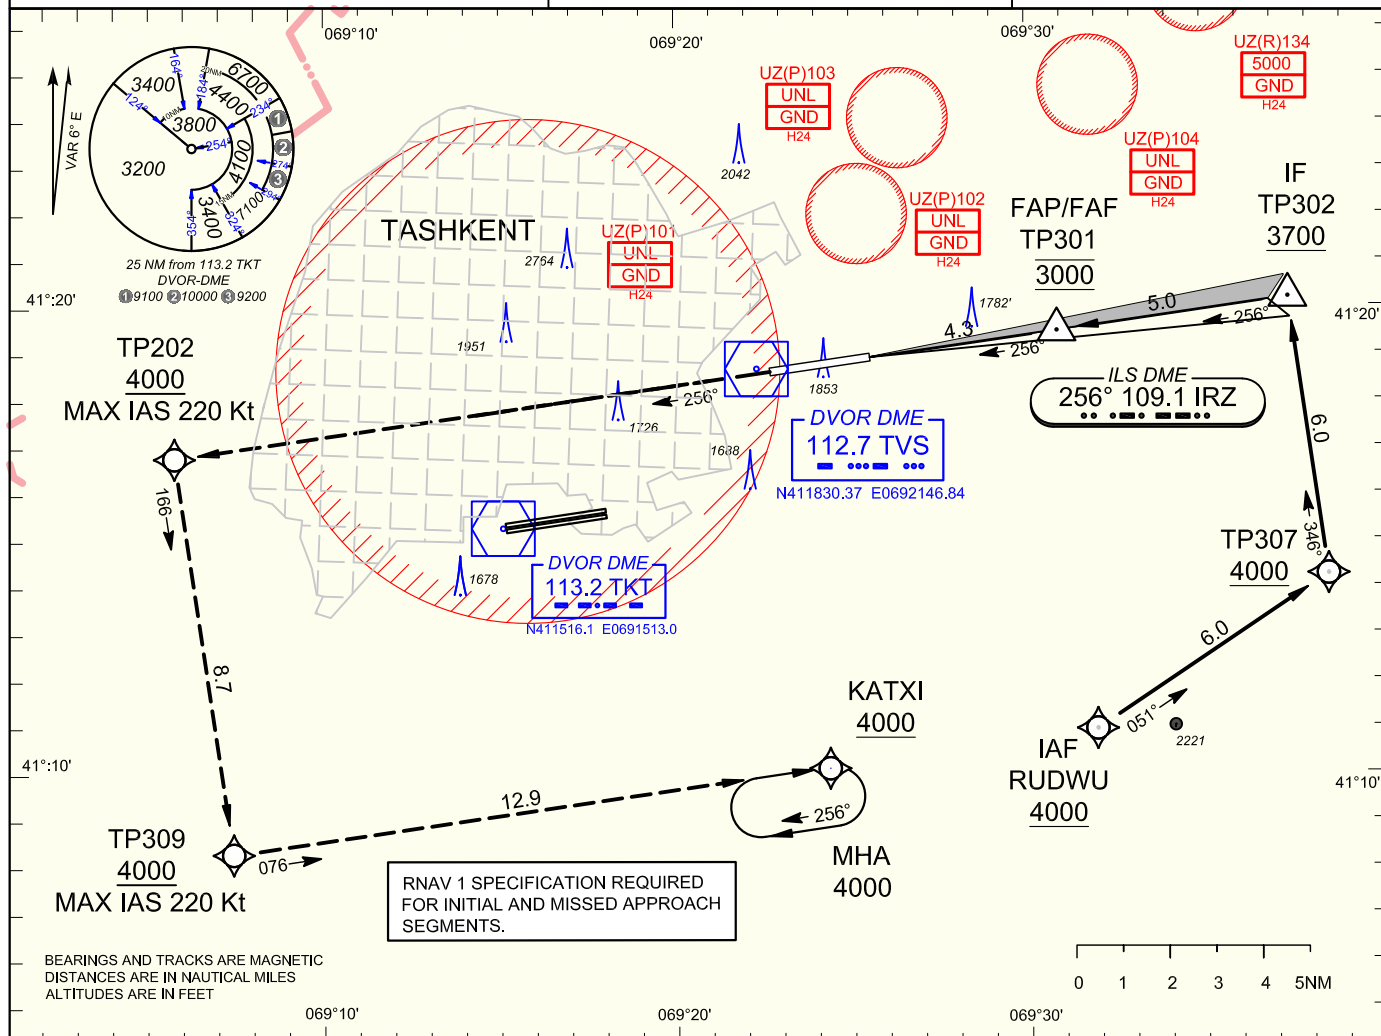

| GS                   | kt     | 70    | 90   | 100  | 120  | 140  | 160  | DIST TO THR | NM | 4    | 3    | 2    | 1    | 0.5  |
|----------------------|--------|-------|------|------|------|------|------|-------------|----|------|------|------|------|------|
| VSP                  | ft/min | 370   | 480  | 530  | 640  | 740  | 850  | ALT         | ft | 2907 | 2589 | 2270 | 1952 | 1793 |
| FAF-THR 4.3NM DG5.2% |        | min:s | 3:41 | 2:52 | 2:35 | 2:09 | 1:50 | 1:37        |    |      |      |      |      |      |



MISSED APPROACH: Climb on on route TP202 - TP309 - KATXI to 4000. Cross TP202 at or above 4000.  
Hold over KATXI or follow ATC instruction.

| CAT OF ACFT            |     |         | A          | B | C | D          |
|------------------------|-----|---------|------------|---|---|------------|
| OCA (H)<br>STRAIGHT-IN | ILS | CAT III | APPROVED   |   |   |            |
|                        |     | CAT II  | 1683 (100) |   |   | 1703 (120) |
|                        |     | CAT I   | 1783 (200) |   |   |            |
|                        | LOC |         | 1833 (250) |   |   |            |

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE AD2.24-6.X.1

## INSTRUMENT APPROACH PROCEDURE - ILS to RNAV (GNSS) M RWY26

| Path Descriptor | WPT Identifier | Fly-over | Course/Track, ° M (T) | Magnetic Variation | Distance (NM) | Turn Direction | Altitude (FT) | Speed Limit (KT) | VPA/TCH °/FT | Navigation Specification |
|-----------------|----------------|----------|-----------------------|--------------------|---------------|----------------|---------------|------------------|--------------|--------------------------|
| IF              | RUDWU          | -        | -                     | +5.5               | -             | -              | +A4000        | -                | -            | RNAV 1                   |
| TF              | TP307          | -        | 051 (056.3)           | +5.5               | 6.0           | -              | +A4000        | -                | -            | RNAV 1                   |
| TF              | TP302          | -        | 346 (351.8)           | +5.5               | 6.0           | L              | +A3700        | -                | -            | RNAV 1                   |
| CF              | TP301          | -        | 256 (261.9)           | +5.5               | 5.0           | L              | @3000         | -                | -            |                          |
| CF              | THR26          | Y        | 256 (261.9)           | +5.5               | 4.3           | -              | -             | -                | -3.0°/50     |                          |
| CF              | TP202          | -        | 256 (261.9)           | +5.5               | 14.7          | -              | +A4000        | -220             | -            | RNAV 1                   |
| TF              | TP309          | -        | 166 (171.6)           |                    | 8.7           | L              | +A4000        |                  |              | RNAV 1                   |
| TF              | KATXI          | -        | 076 (081.4)           | +5.5               | 12.9          | L              | +A4000        | -220             | -            | RNAV 1                   |

| Paht Descriptor | WPT Identifier | Inbound course, ° M (T) | Leg distance (NM) | Turn direction | Minimum altitude (FT) | Maximum altitude (FT) | Speed limit (KT) | Magnetic variation | Navigation specification | Remarks                 |
|-----------------|----------------|-------------------------|-------------------|----------------|-----------------------|-----------------------|------------------|--------------------|--------------------------|-------------------------|
| Hold            | KATXI          | 076(081.6)              | -                 | R              | A4000                 | -                     | -                | +5.5               | RNAV1                    | 1min 00sec below A13000 |