
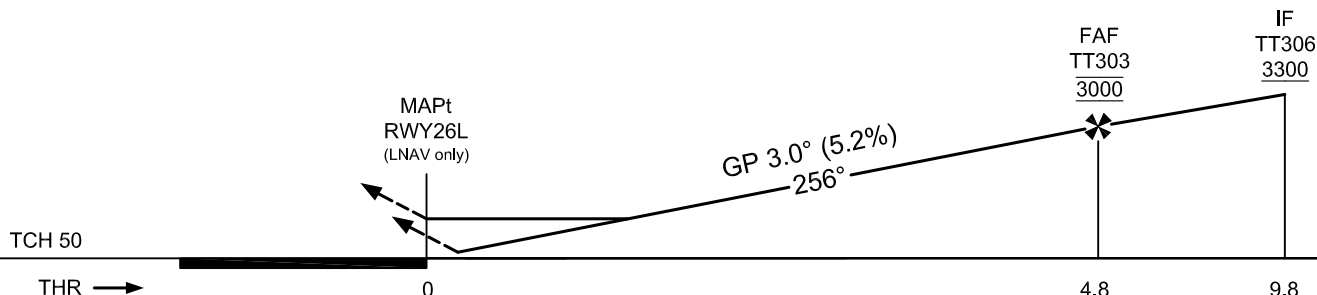


ATIS	126.8
TASHKENT APPROACH	119.4
	122.9
TASHKENT TOWER	120.4

RNP C RWY 26L

AD ELEV	1417
THR ELEV	1412
TRANSITION LEVEL	FL150
TRANSITION ALTITUDE	13000

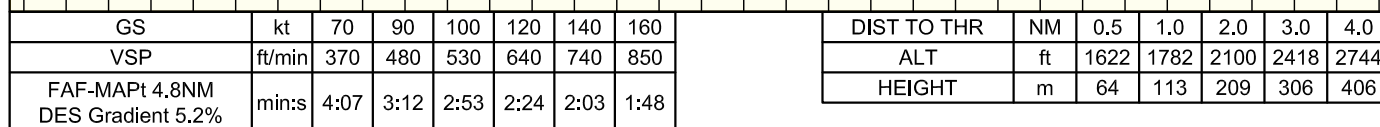

MISSED APPROACH: Climb to 4000 via route ODP|V-TT225 -KATX|. Hold over KATX| or follow ATC instruction.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	LNAV/VNAV	1707 (294)	1719 (306)	1727 (314)	1737 (324)
	LNAV	1890 (480)			

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE AD2.24-6.X-1

INSTRUMENT APPROACH PROCEDURE - RNP C (GNSS) RWY 26L

Path Descriptor	WPT Identifier	Fly- over	Course/Track, ° M (T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (FT)	Speed limit (KT)	Navigation specification	Remarks
IF	RUDWU	-	-	+5.5	-	-	+A4000	-	-	RNAV 1
TF	TT306	-	347 (352.8)	+5.5	6.0	-	+A3300	-	-	RNAV 1
TF	TT303	-	256 (261.8)	+5.5	5.0	L	@A3000	-	-	RNAV 1
TF	RW26L	Y	256 (261.8)	+5.5	4.8	-	-	-	-3.0/50	RNP APCH
CF	ODPIV	-	256 (261.7)	+5.5	9.8	-	+A3100	-200	-	RNAV 1
TF	TT225	-	167 (172.9)	+5.5	6.0	L	+A3800	-200	-	RNAV 1
TF	KATXI	-	076 (081.4)	+5.5	13.9	L	+A4000	-	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	KATXI	076 (081.4)	R	A4000	-	-	+5.5	RNAV1	