
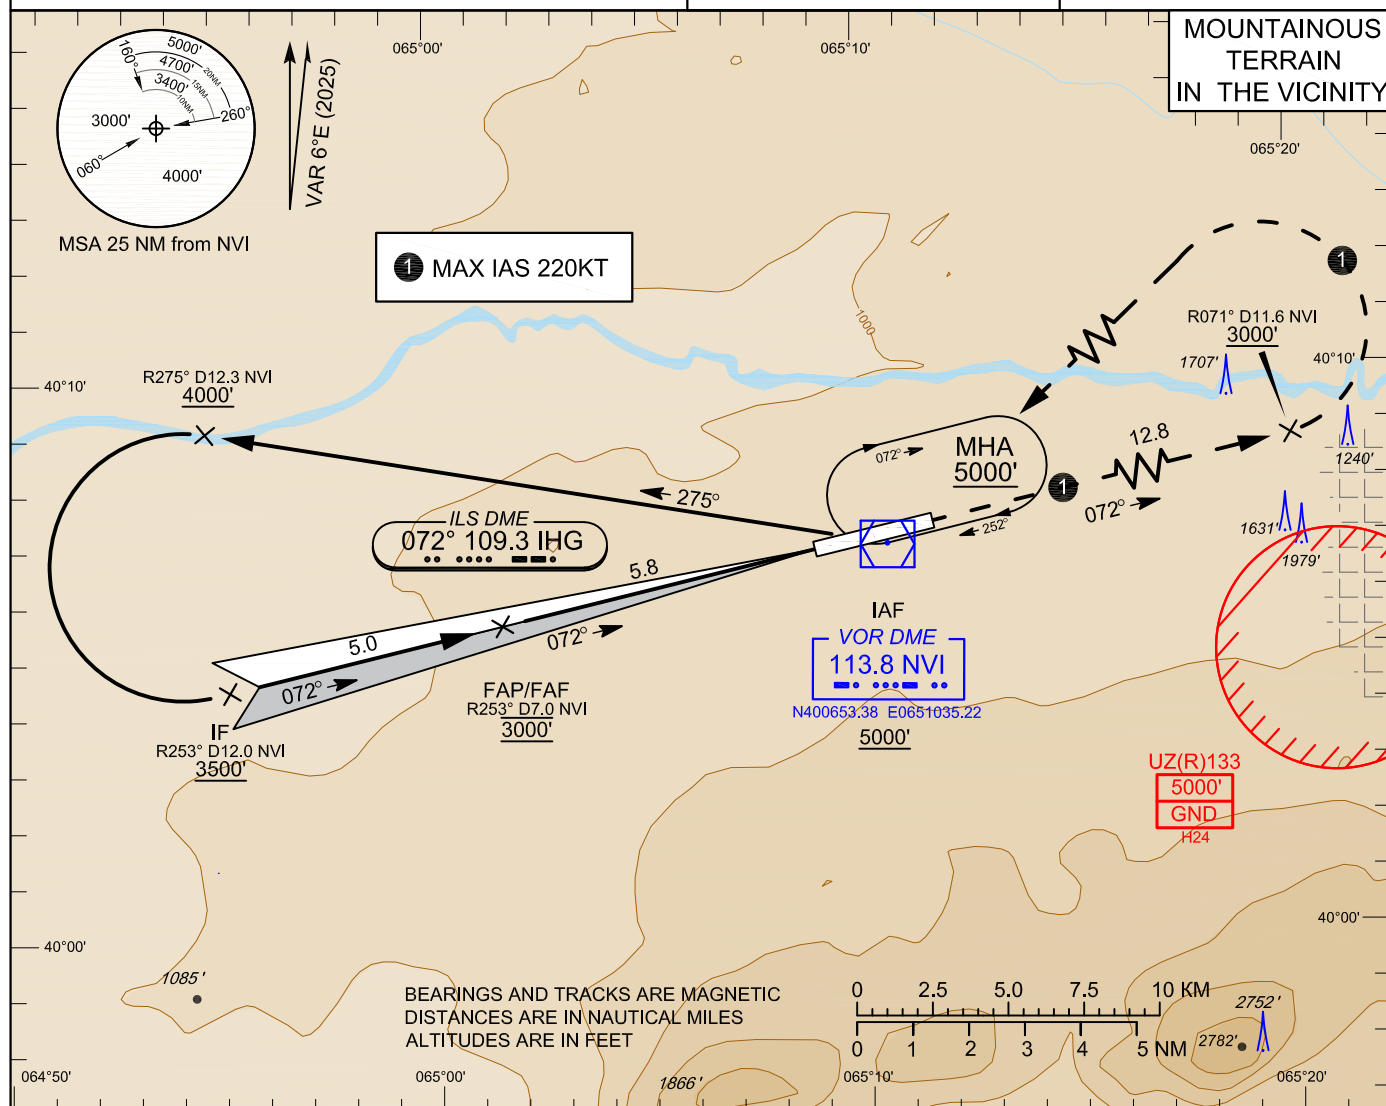


**INSTRUMENT APPROACH
CHART - ICAO**AD ELEV 1142'
THR ELEV 1118'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'BUKHARA APPROACH 124.6
NAVOI TOWER 132.0
VOLMET (english only) 113.8**NAVOI/UZSA**ILS DME Y or LOC DME Y
RWY07 CAT II

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAF - THR 5.8NM	min:s	4:56	3:50	3:27	2:53	2:28	2:09
DES Gradient 5.2%							

DIST TO NVI	NM	2.2	3.2	4.2	5.2	6.2
DIST TO THR/IHG	NM	1.0	2.0	3.0	4.0	5.0
ALT	ft	1487	1806	2124	2442	2761
HEIGHT	m	113	210	307	404	501

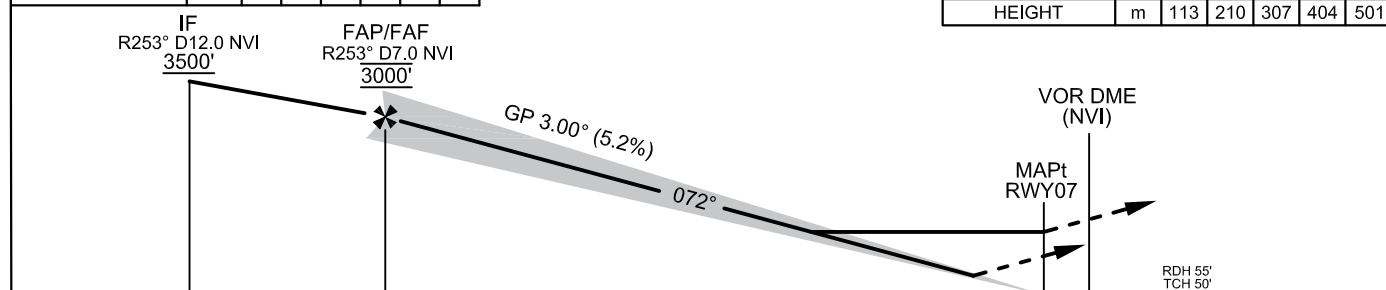

MISSED APPROACH: Climb on TR 072°. Passing R071° D11.6 NVI at 3000' or above TURN LEFT (MAX IAS 220KT) to VOR DME NVI climbing 5000'. HOLD over VOR DME NVI or follow ATC instruction.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	CAT II	1218'(100')			
	CAT I	1318'(200')			
	LOC	1500'(382')			
CIRCLING		1570'(452')	1640'(522')	1740'(622')	1840'(722')

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZSA AD2.24-6.X. CIRCLING NORTH OF AD ONLY.