


INSTRUMENT APPROACH CHART - ICAO

NUKUS APPROACH
NUKUS TOWER129.3
121.3

NUKUS/UZNN


AD ELEV 249'
THR ELEV 245'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

ILS Y or LOC Y
RWY33

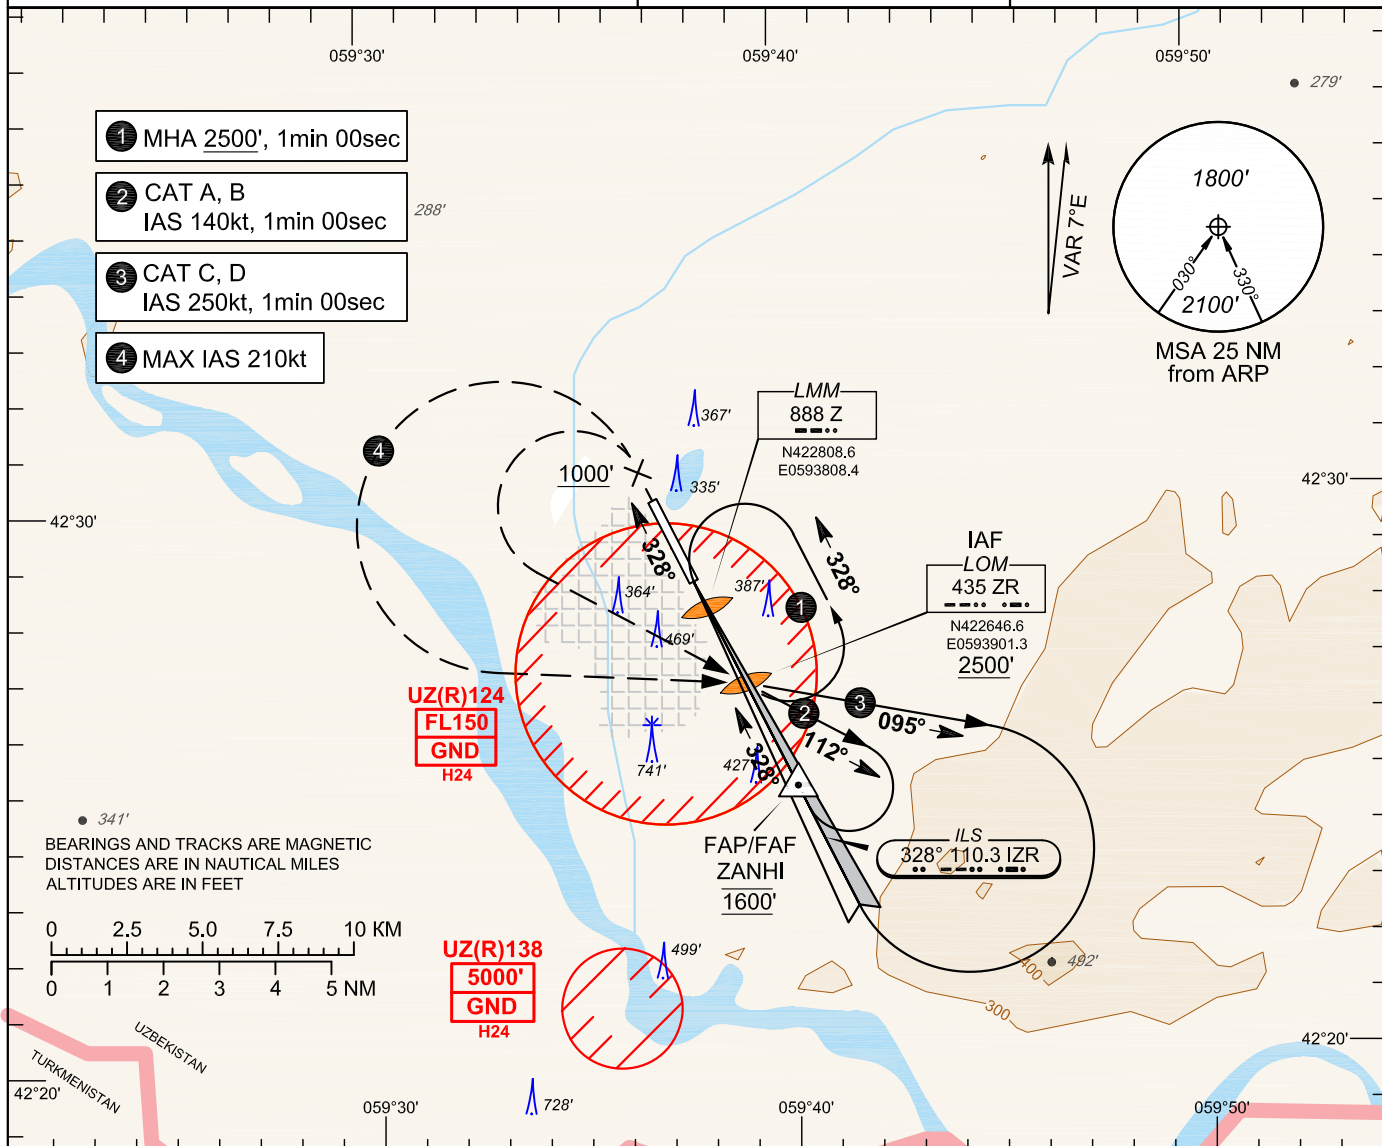

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	750	850
FAF - MAPt 4.1 NM DES Gradient 5.2%	min:s	3:30	2:43	2:27	2:03	1:45	1:32

DIST TO THR	NM	1.0	2.0	3.0	4.0
ALT	ft	618	932	1254	1573
HEIGHT	m	114	211	308	405

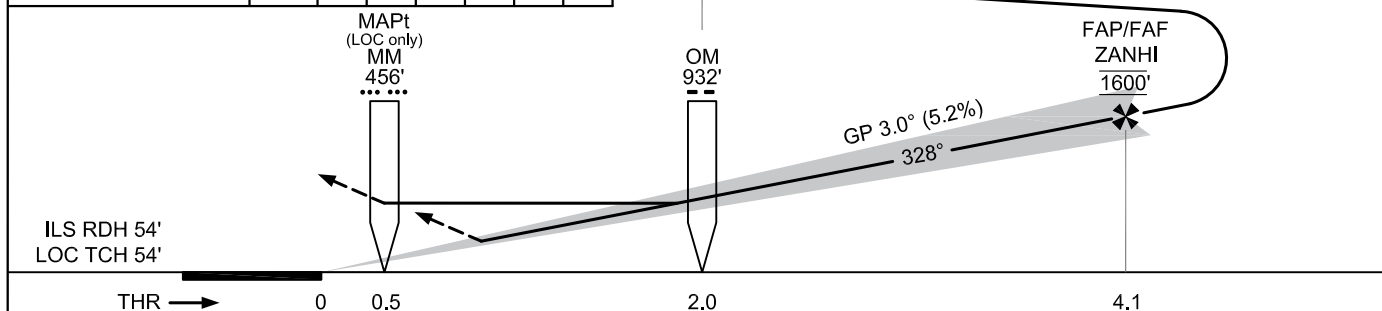

MISSED APPROACH: Climb on TR 328° to 1000', then TURN LEFT proceed to LOM 435 ZR climbing 2500' or above.
HOLD over LOM 435 ZR or follow ATC instructions.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	CAT I	446' (201')		451' (206')	461' (216')
	LOC	620' (371')			
CIRCLING		750' (505')		940' (695')	

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZNN AD2.24-6.X.