


INSTRUMENT APPROACH CHART - ICAO

AD ELEV 321'
THR ELEV 318'
TRANSITION LEVEL FL150
TRANSITION ALTITUDE 13000'

URGENCH APPROACH 126.0
URGENCH TOWER 118.3

URGENCH/UZNU


RNP RWY31

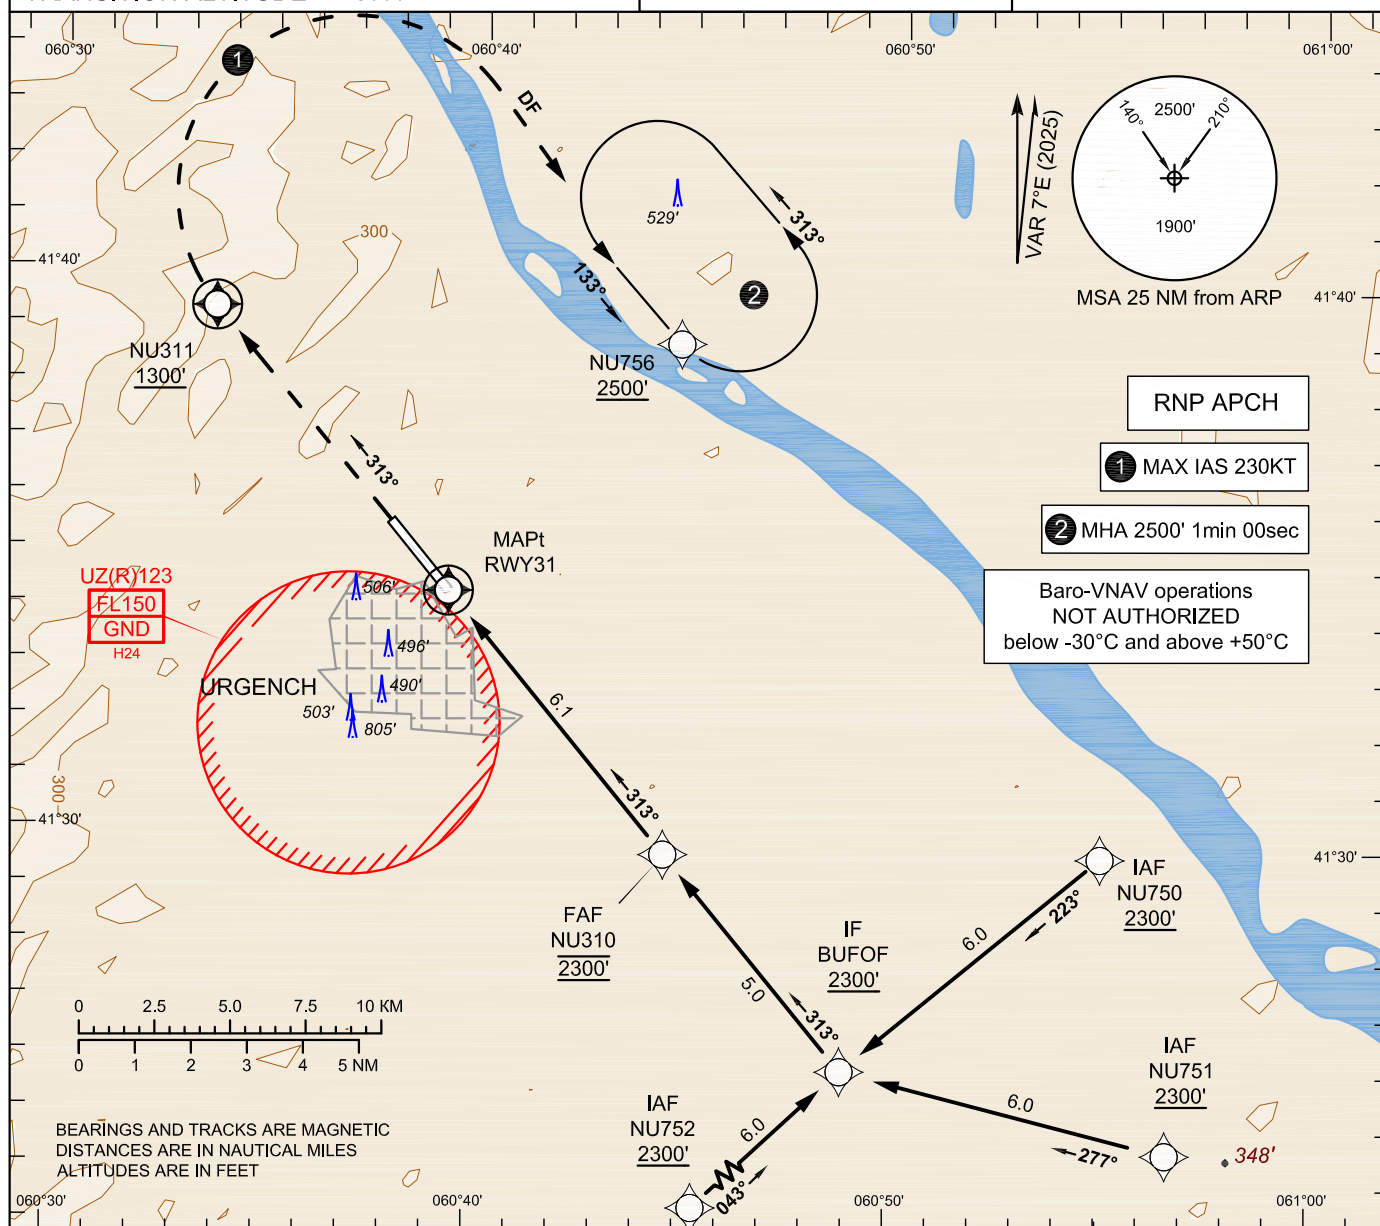

BEARINGS AND TRACKS ARE MAGNETIC
DISTANCES ARE IN NAUTICAL MILES
ALTITUDES ARE IN FEET

GS	kt	70	90	100	120	140	160
VSP	ft/min	370	480	530	640	740	850
FAF - THR 6.1NM DES Gradient 5.2%	min:s	5:12	4:02	3:38	3:02	2:36	2:16

DIST TO THR	NM	2.0	3.0	4.0	5.0	6.1
ALT	ft	1007	1325	1644	1962	2300
HEIGHT	m	210	307	404	502	605

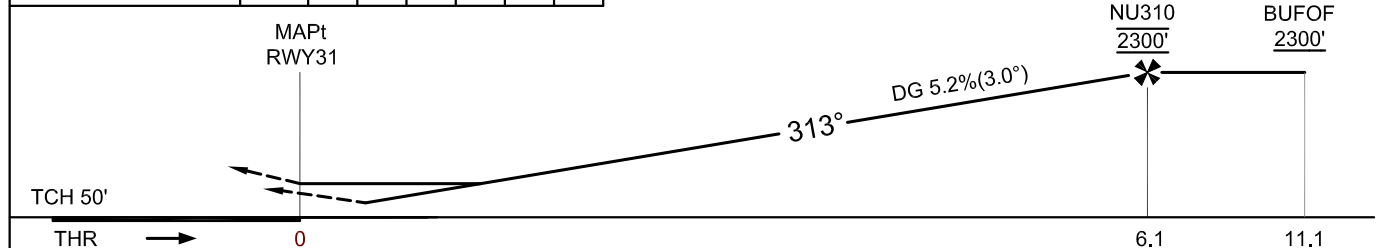

MISSED APPROACH: Climb on TR 313°. Passing NU311 at 1300' or above TURN RIGHT (MAX IAS 230KT) to NU756 climbing 2500'.
HOLD over NU756 or follow ATC instructions.

CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT-IN	LNAV/VNAV	610'(300')			
	LNAV	680'(360')			
CIRCLING		1200'(882')			

NOTE: STATE MINIMAS ARE INDICATED ON THE PAGE UZNU AD2.24-6.X.

INSTRUMENT APPROACH ROUTES - RNP APCH (GNSS) - RWY31

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	NU750	-	-	+6.6	-	-	+A2300	-	-	RNAV 1
TF	BUFOF	-	223 (229.6)	+6.5	6.0	-	+A2300	-	-	RNAV 1
TF	NU310	-	313 (319.6)	+6.6	5.0	R	@A2300	-	-	RNAV 1
TF	RWY31	Y	313 (319.6)	+6.6	6.1	-	-	-	-3.0/50	RNP APCH
CF	NU311	Y	313 (319.6)	+6.6	-	-	+A1300	-230	-	RNAV 1
DF	NU756	-	-	+6.6	-	R	+A2500	-230	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	NU751	-	-	+6.6	-	-	+A2300	-	-	RNAV 1
TF	BUFOF	-	277 (283.3)	+6.6	6.0	-	+A2300	-	-	RNAV 1
TF	NU310	-	313 (319.6)	+6.6	5.0	R	@A2300	-	-	RNAV 1
TF	RWY31	Y	313 (319.6)	+6.6	6.1	-	-	-	-3.0/50	RNP APCH
CF	NU311	Y	313 (319.6)	+6.6	-	-	+A1300	-230	-	RNAV 1
DF	NU756	-	-	+6.6	-	R	+A2500	-230	-	RNAV 1

Path Descriptor	WPT Identifier	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed Limit (KT)	VPA/TCH °/FT	Navigation Specification
IF	NU752	-	-	+6.6	-	-	+A2300	-	-	RNAV 1
TF	BUFOF	-	043(049.4)	+6.5	6.0	-	+A2300	-	-	RNAV 1
TF	NU310	-	313 (319.6)	+6.6	5.0	L	@A2300	-	-	RNAV 1
TF	RWY31	Y	313 (319.6)	+6.6	6.1	-	-	-	-3.0/50	RNP APCH
CF	NU311	Y	313 (319.6)	+6.6	-	-	+A1300	-230	-	RNAV 1
DF	NU756	-	-	+6.6	-	R	+A2500	-230	-	RNAV 1

Path Descriptor	WPT Identifier	Inbound course °M (°T)	Turn direction	Minimum altitude (FT)	Maximum altitude (FT)	Speed limit (KT)	Magnetic variation	Navigation specification	Remarks
Hold	NU756	133 (139.8)	L	A2500	A13000	-230	+6.6	RNAV 1	1min 00sec